


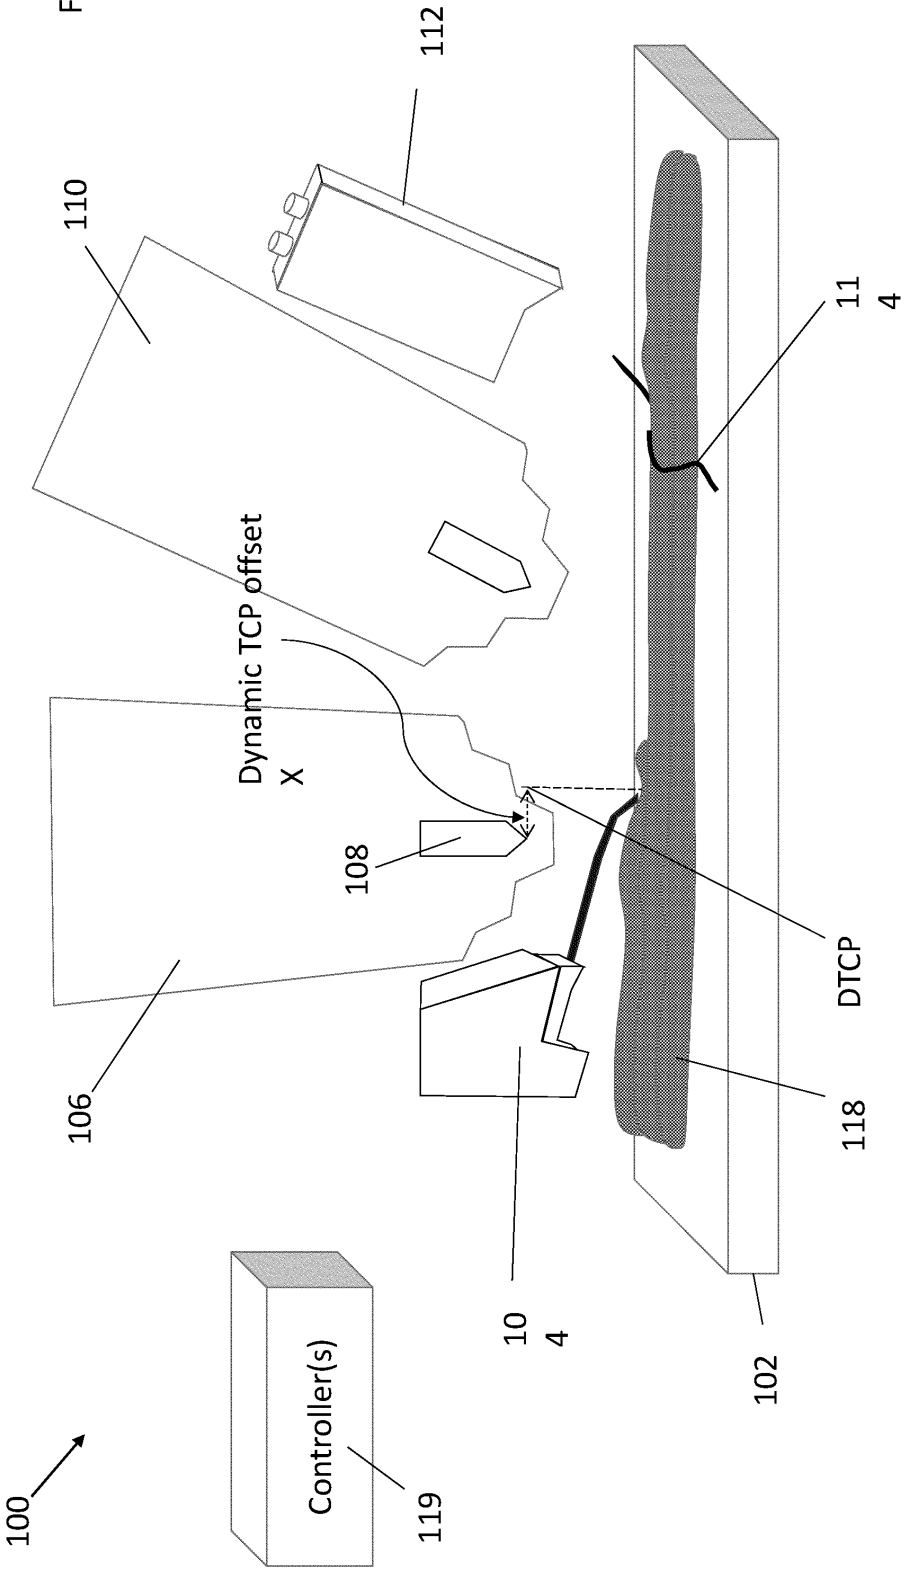

RPD™ Process flow

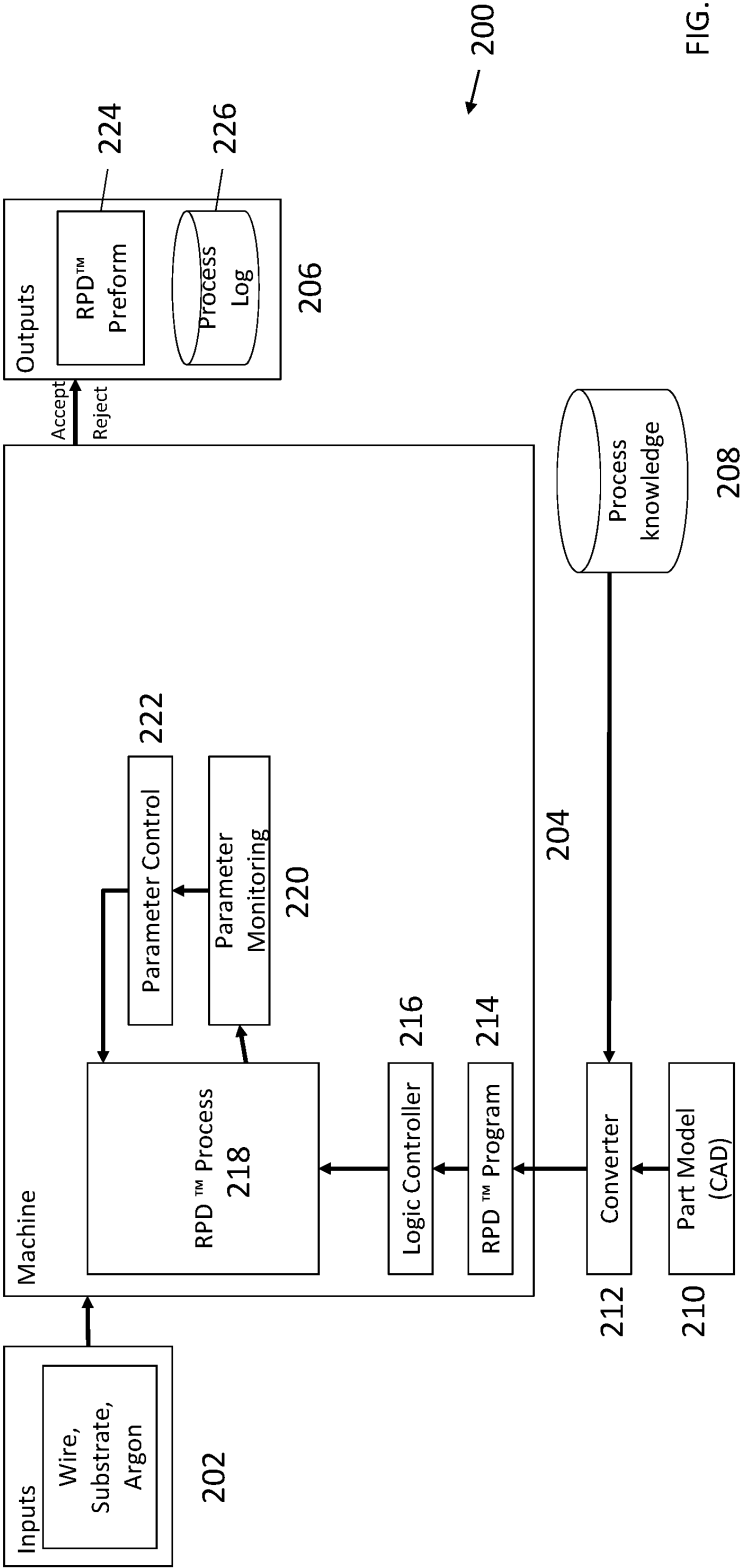


FIG. 2

RPD™ Process flow


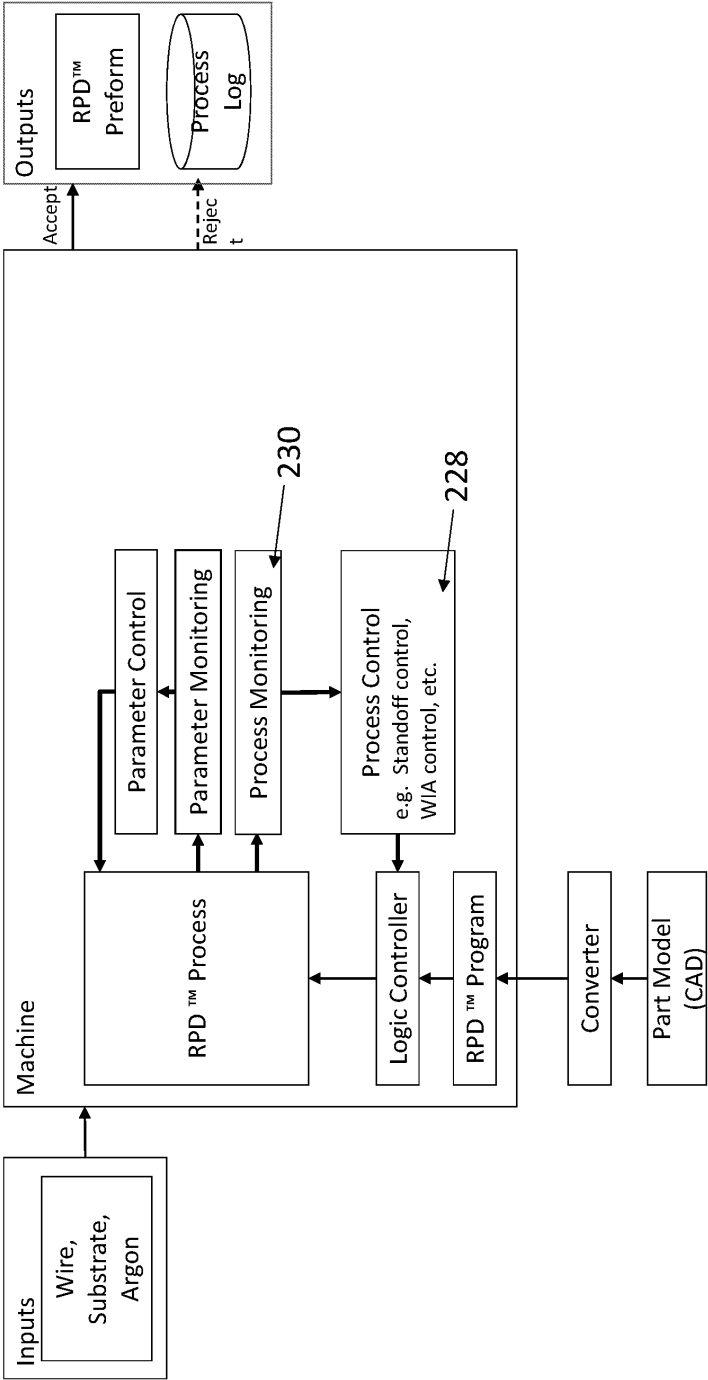


FIG. 3

Why Standoff Control

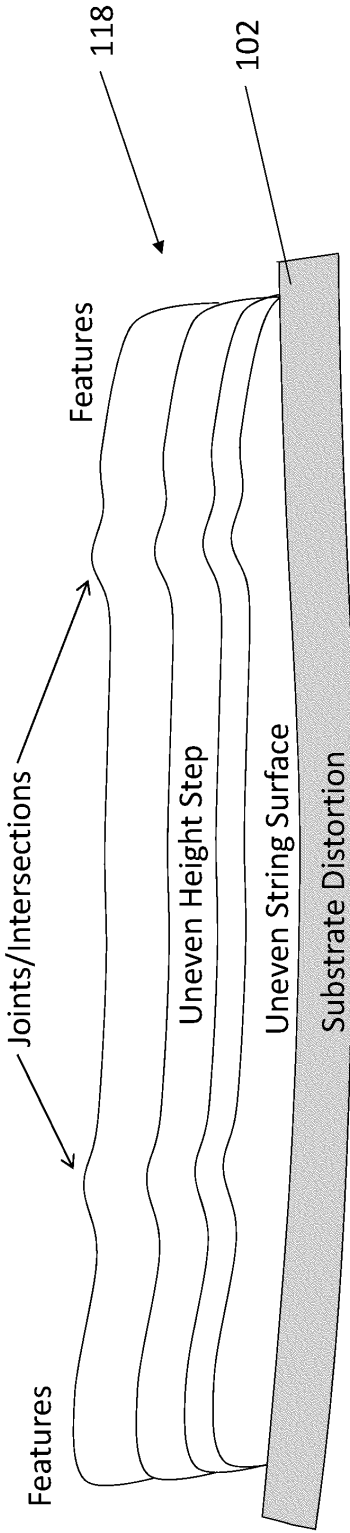

Complex Process Variations

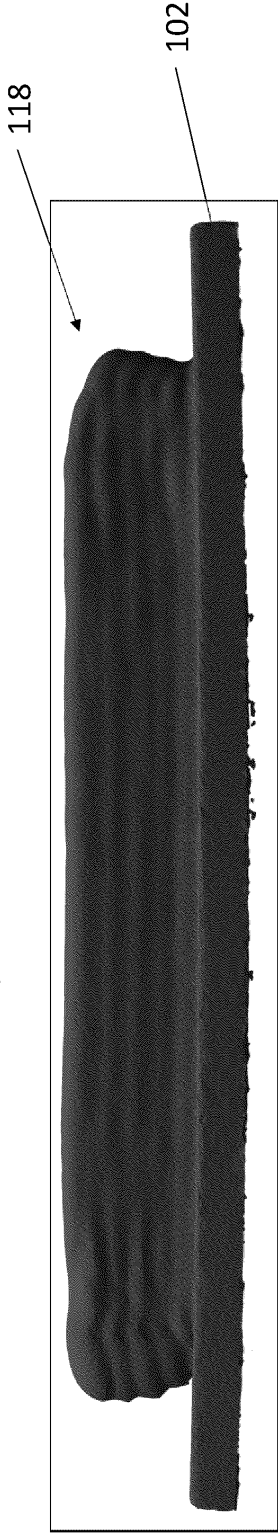


FIG. 4


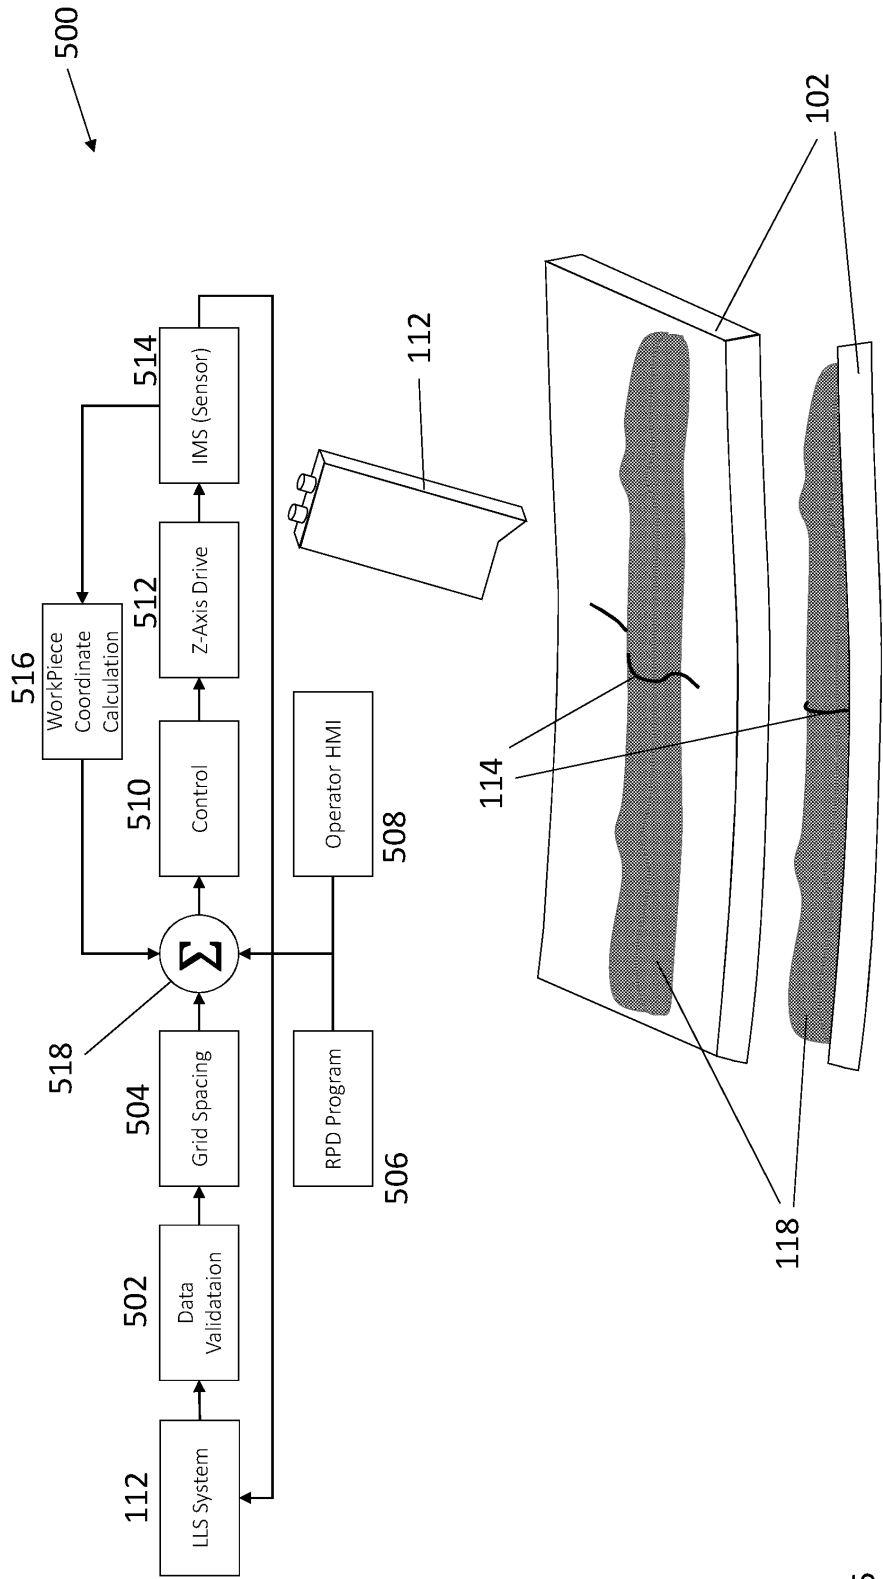




FIG. 5


FIG. 6

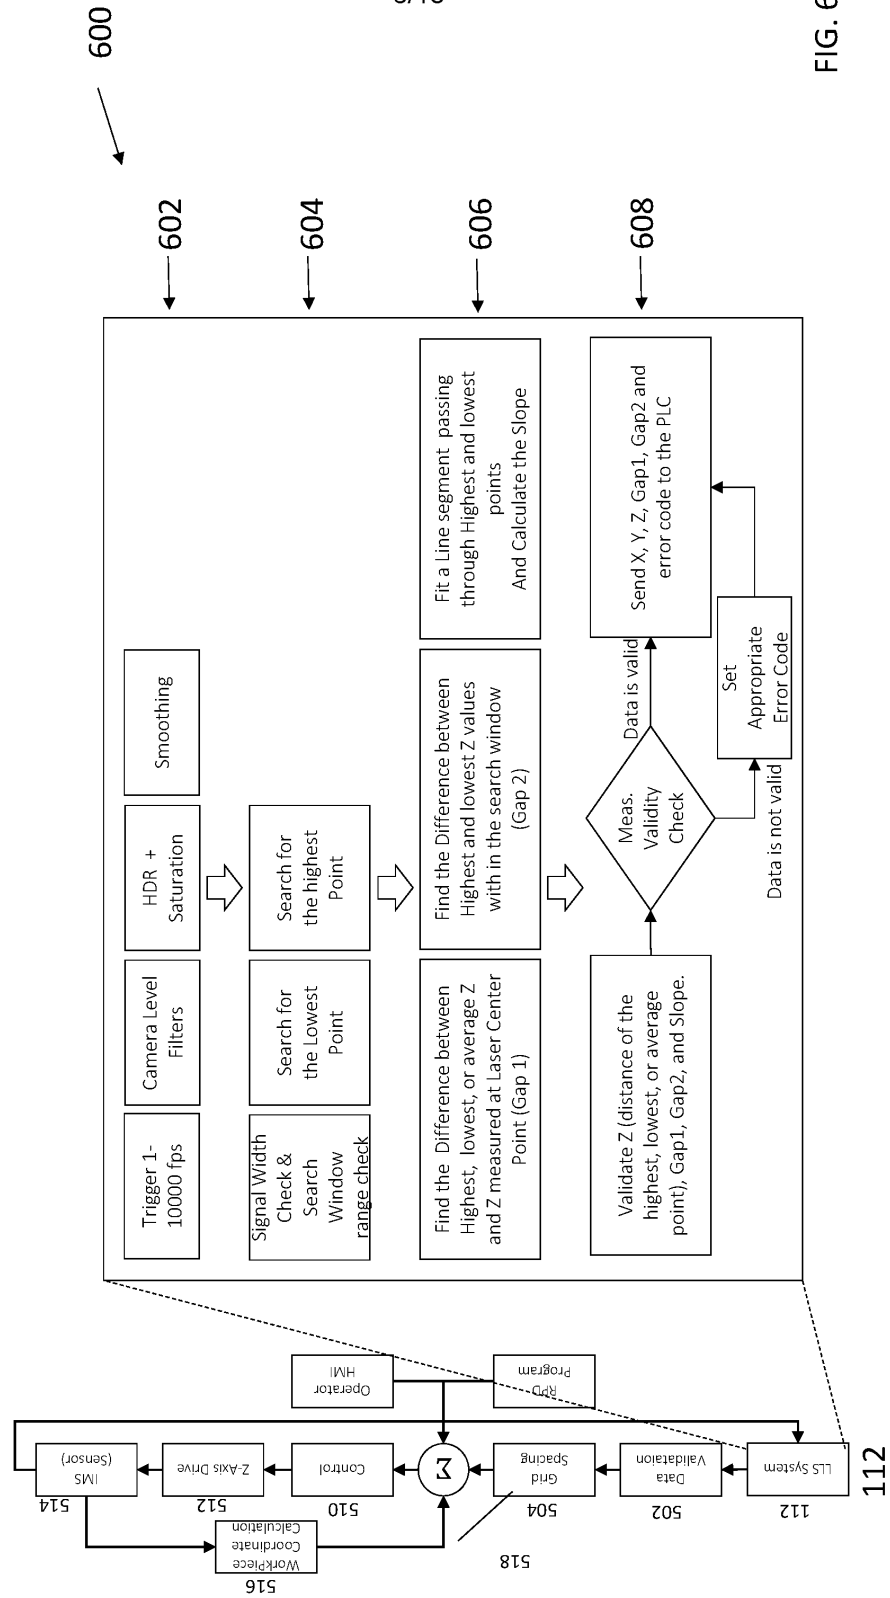

700


FIG. 7

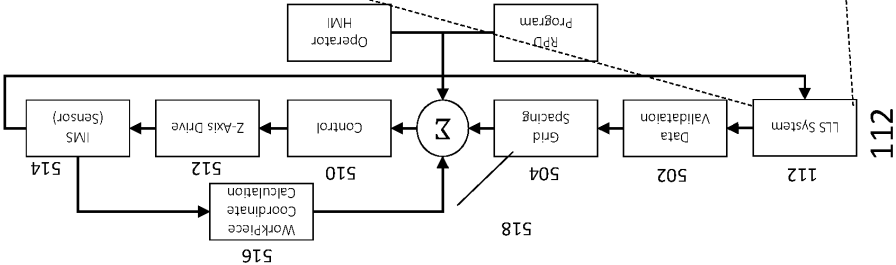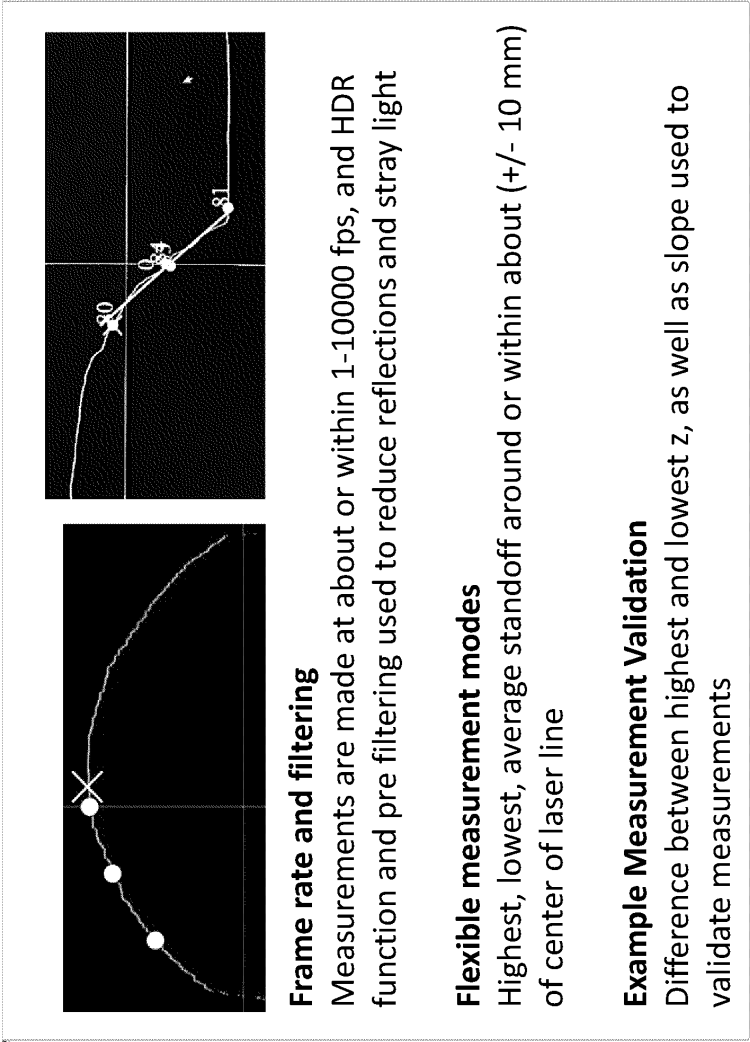

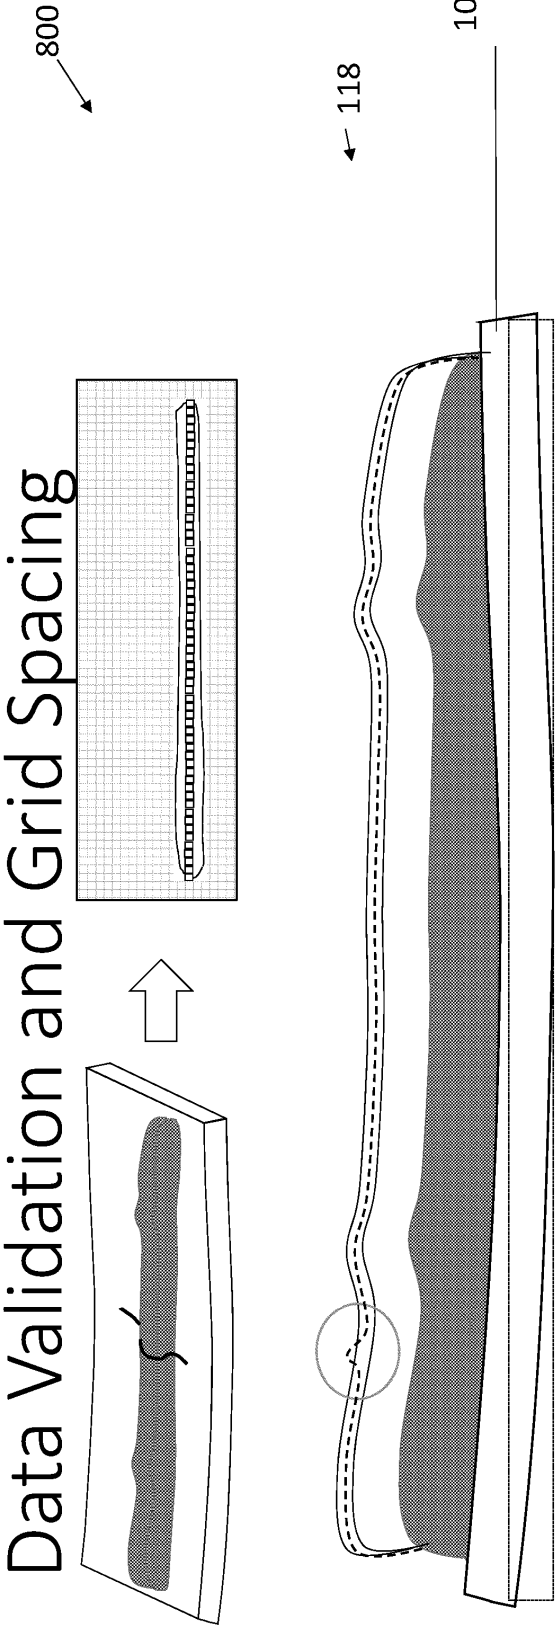

	Low pass filter -> Moving average about 1-1000 ms outlier removal
	Actual measurements

FIG. 8

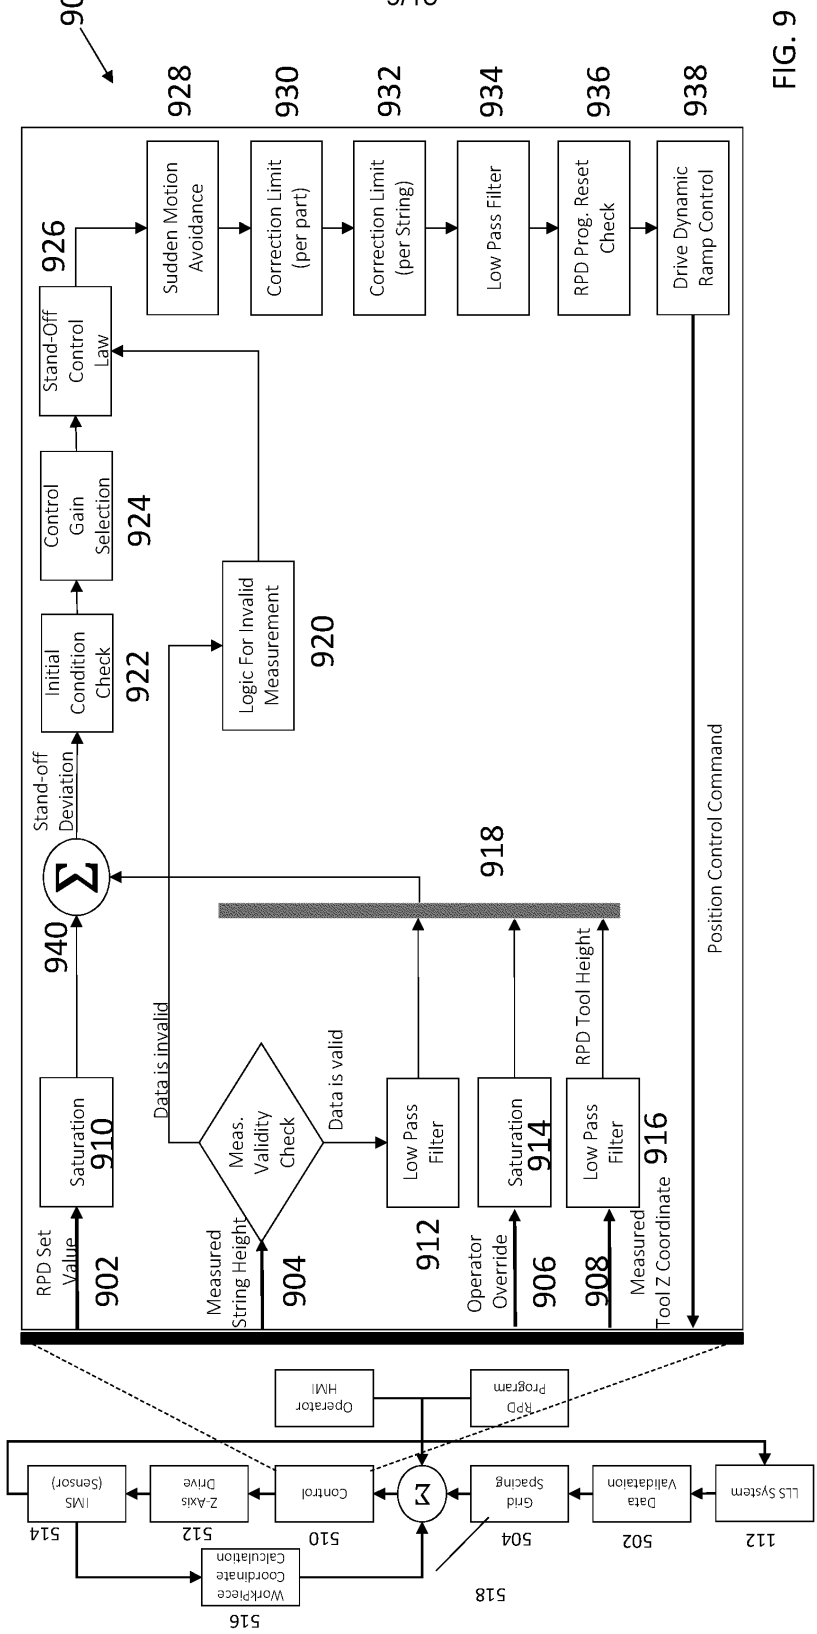

1000
↘


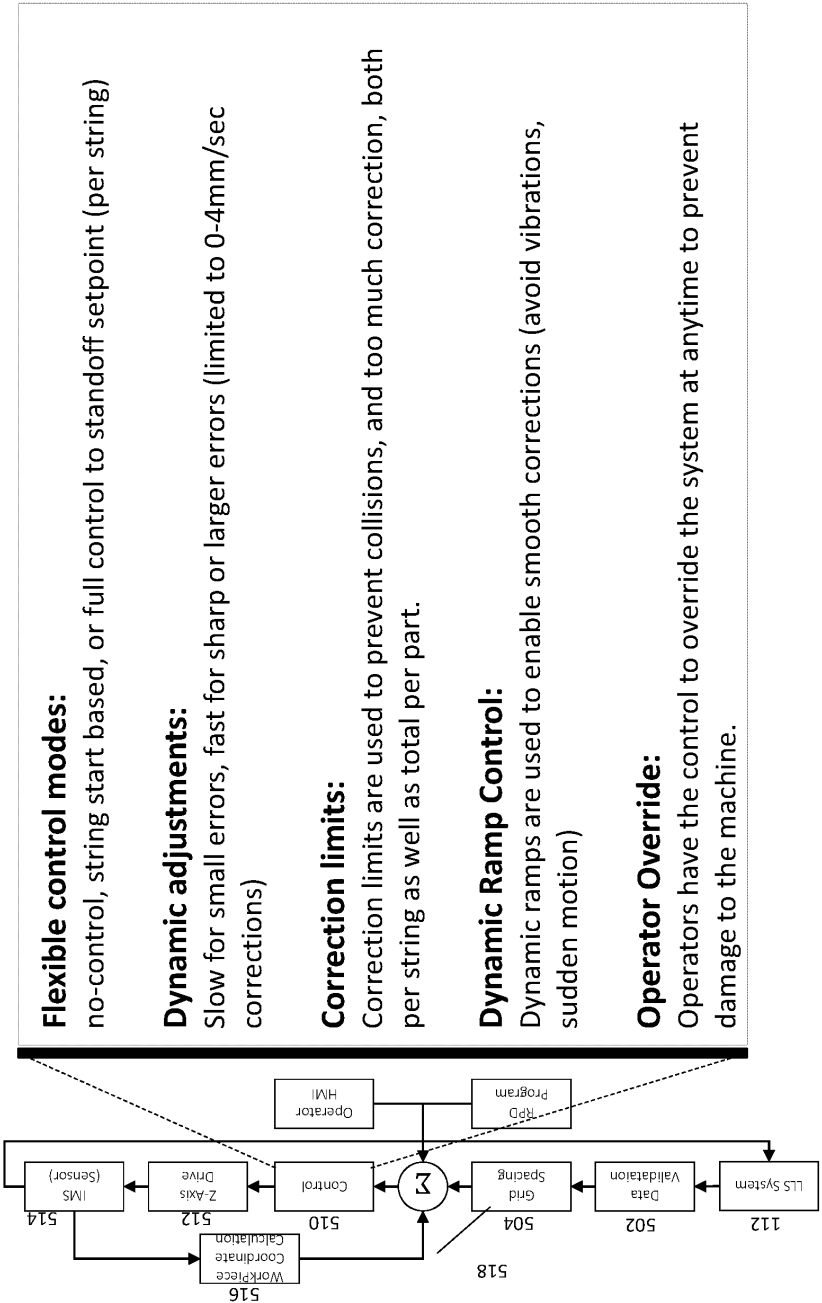


FIG. 10

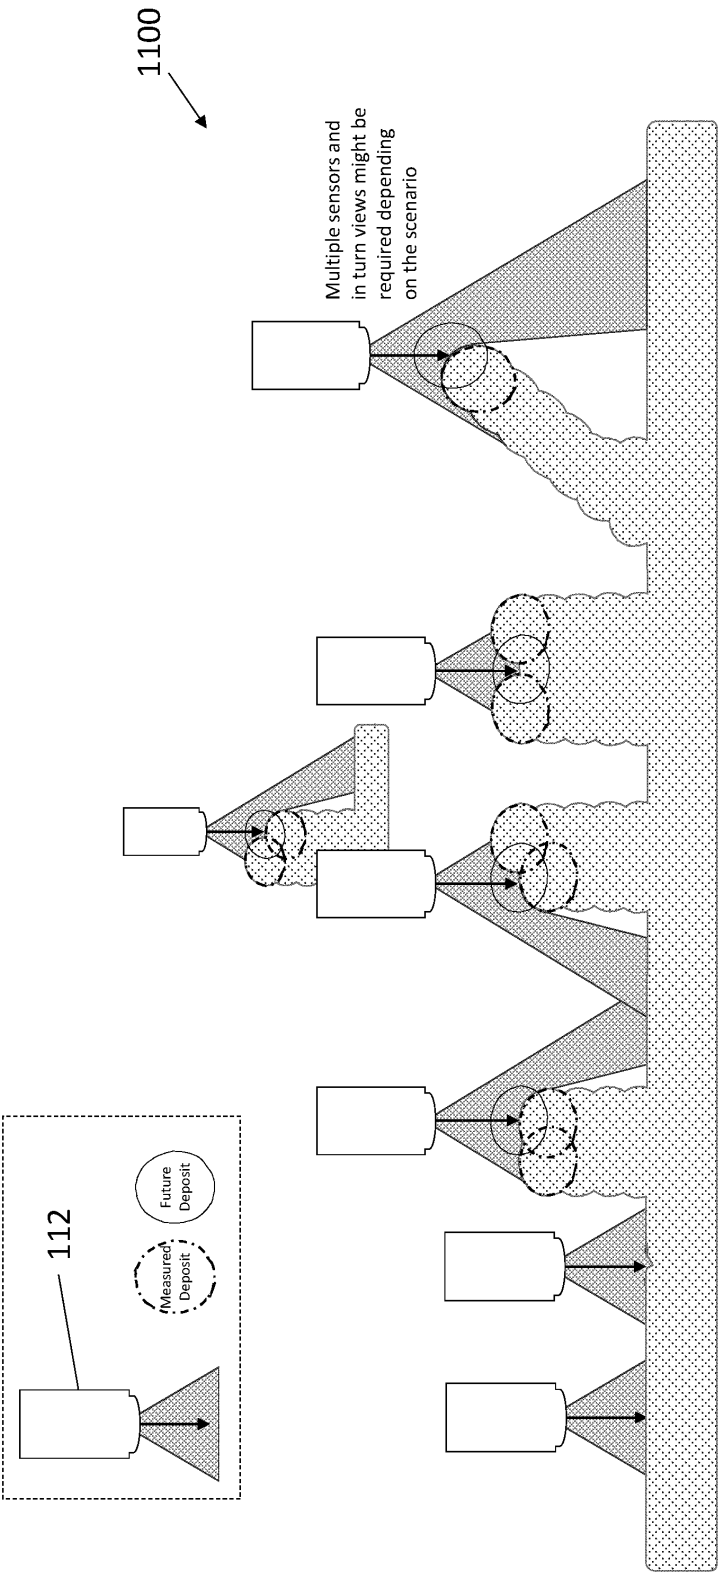

1200

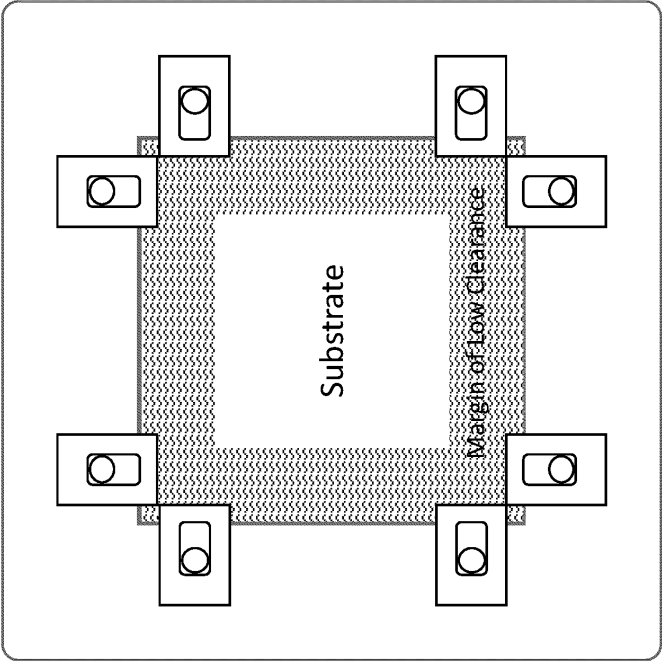


FIG. 12

