

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

2000/1444-9


1903
copy



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: B31F 1/07	A1	(11) International Publication Number: WO 99/14035 (43) International Publication Date: 25 March 1999 (25.03.99)
(21) International Application Number: PCT/IB98/01439 (22) International Filing Date: 17 September 1998 (17.09.98) (30) Priority Data: 08/932,854 18 September 1997 (18.09.97) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors: MCNEIL, Kevin, Benson; 9736 Aspen Knoll Court, Loveland, OH 45140 (US). BOATMAN, Donn, Nathan; 301 North Main Street, Williamstown, KY 41097 (US). (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: PROCESS FOR PHASED CONVERTING OF EMBOSSED, JOINED LAMINATE

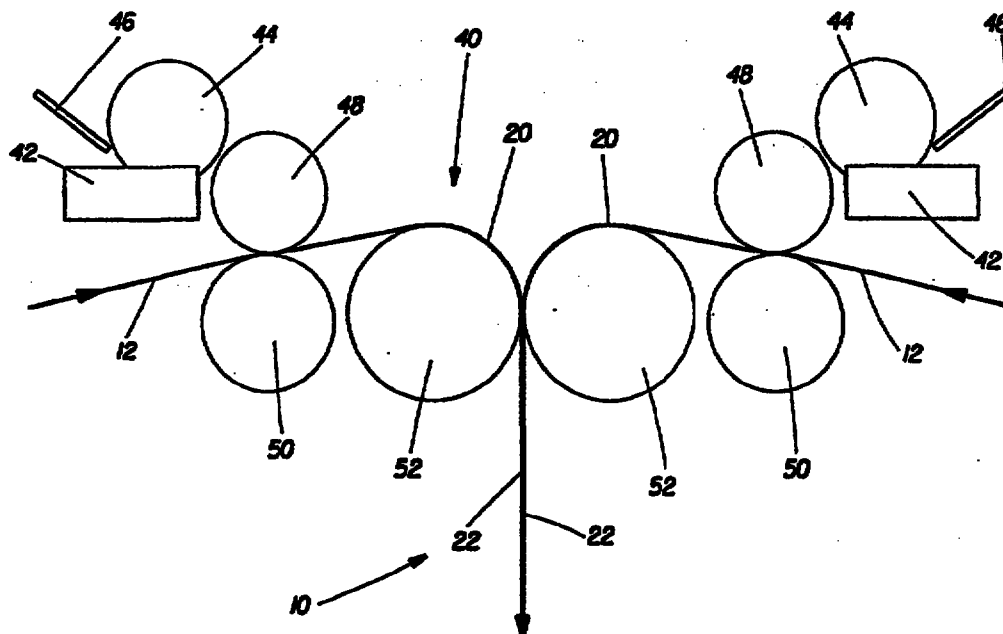

(57) Abstract

A laminate having two or more plies. The plies are embossed, and adhesively joined together. The adhesive forms an essentially continuous network. The essentially network increases the strength of adhesive, increases the strength of the laminate, and is disposed within the X-Y plane of the laminate coincide the embossments.