



- (51) **International Patent Classification:**
H04W 48/10 (2009.01) *H04W 76/02* (2009.01)
H04W 60/00 (2009.01)
- (21) **International Application Number:**
PCT/FI2013/050156
- (22) **International Filing Date:**
12 February 2013 (12.02.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/409,404 1 March 2012 (01.03.2012) US
- (71) **Applicant:** NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FI-02150 Espoo (FI).
- (72) **Inventors:** KNECKT, Jarkko Lauri Sakari; Rakentajainrinne 6, FI-02330 Espoo (FI). ALANEN, Olli Petteri; Hagelstamintie 11 F 19, FI-01520 Vantaa (FI).
- (74) **Agents:** NOKIA CORPORATION et al.; IPR Department, Jussi Jaatinen, Keilalahdentie 4, FI-02150 Espoo (FI).


- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD, APPARATUS, AND COMPUTER PROGRAM PRODUCT FOR PROBE REQUEST AND RESPONSE EXCHANGE

FIG. 4A

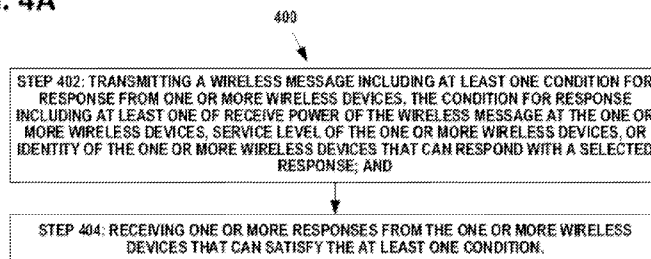

(57) **Abstract:** Method, apparatus, and computer program product embodiments of the invention are disclosed to improve the discovery of wireless networks. In example embodiments of the invention, a method comprises: transmitting a wireless message including at least one condition for response from one or more wireless devices, the condition for response including at least one of receive power of the wireless message at the one or more wireless devices, service level of the one or more wireless devices, or identity of the one or more wireless devices that can respond with a selected response; and receiving one or more responses from the one or more wireless devices that can satisfy the at least one condition.