

1/4

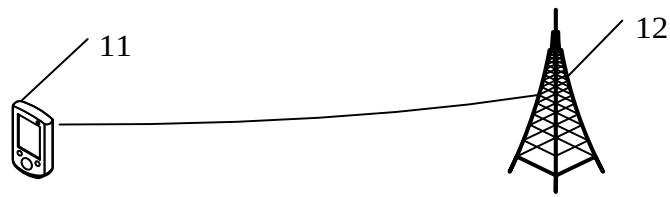


FIG. 1

In a case that inter-modulation interference occurs between frequencies corresponding to different radio access technologies RATs, send auxiliary information of the inter-modulation interference to a network-side device, where the auxiliary information includes identification information of a first frequency associated with the inter-modulation interference and interference information of the first frequency

FIG. 2

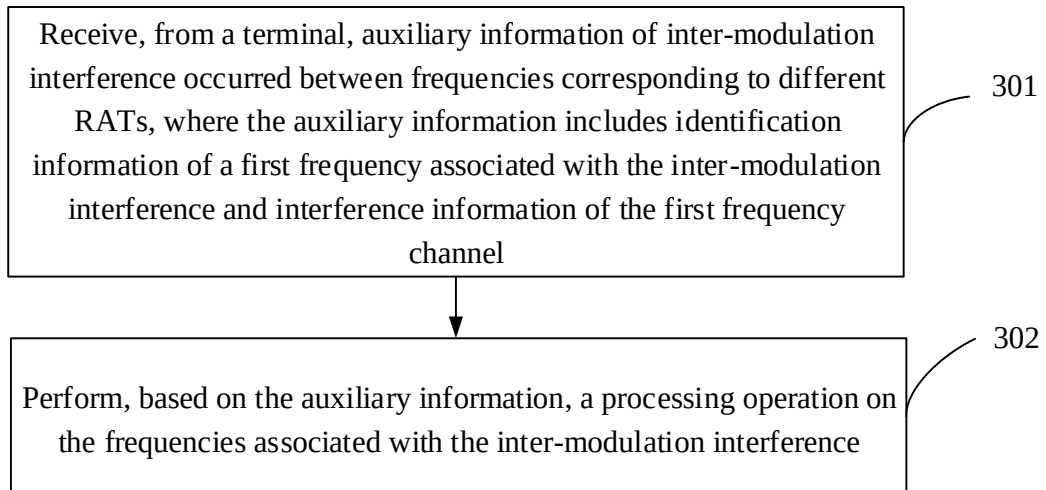


FIG. 3

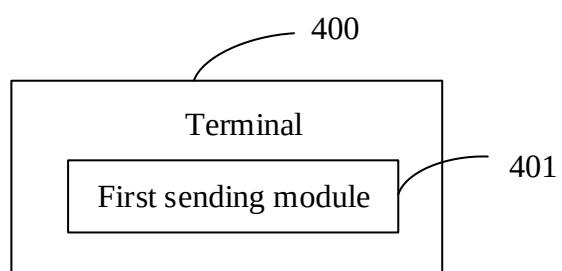


FIG. 4

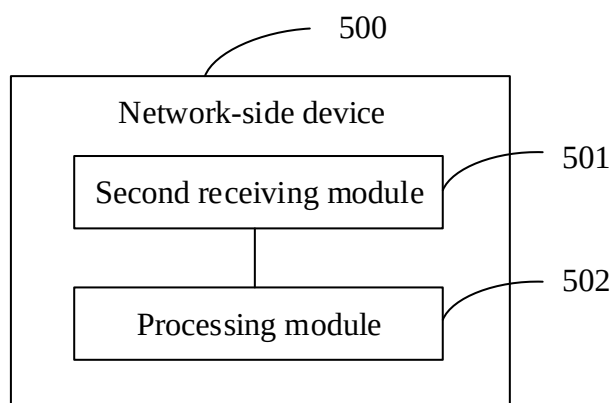


FIG. 5

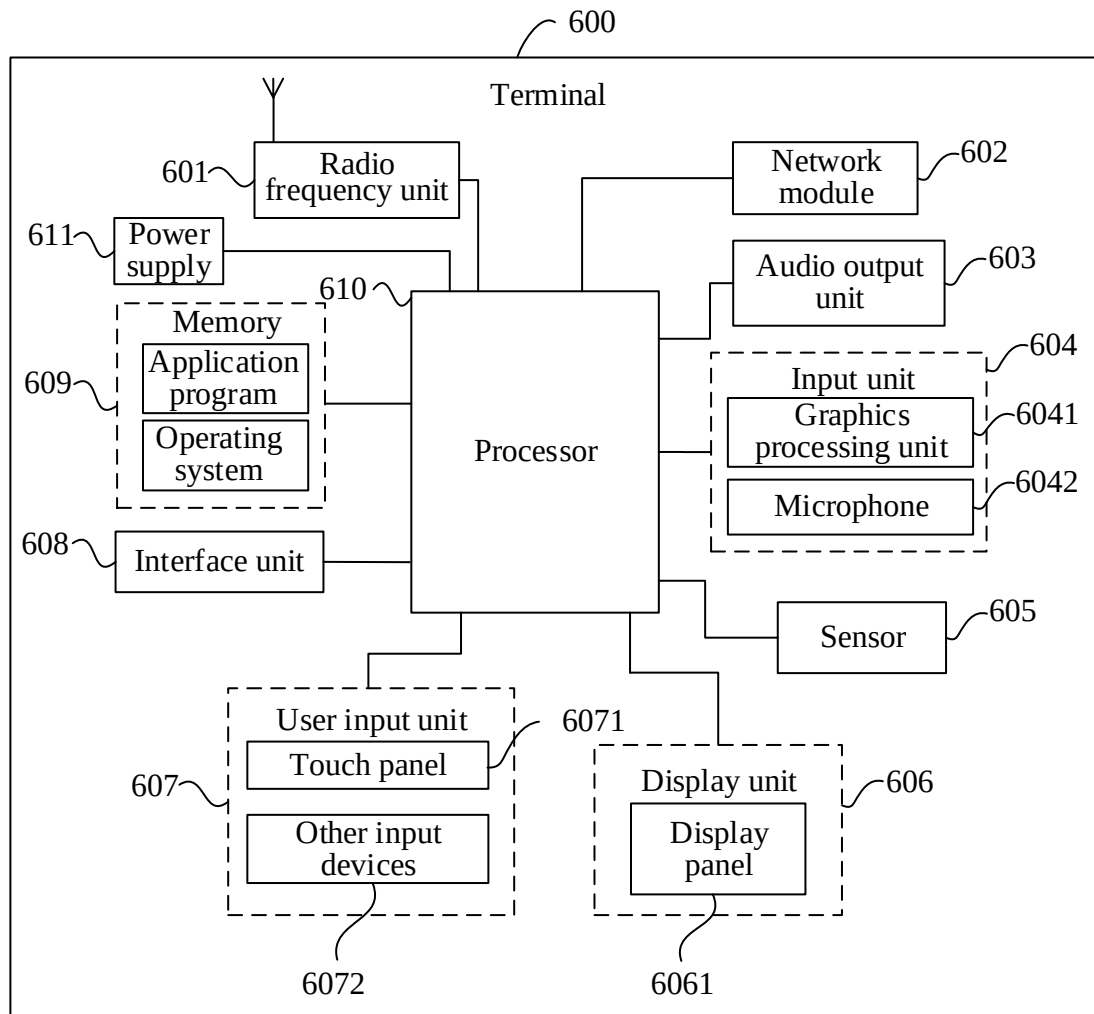


FIG. 6

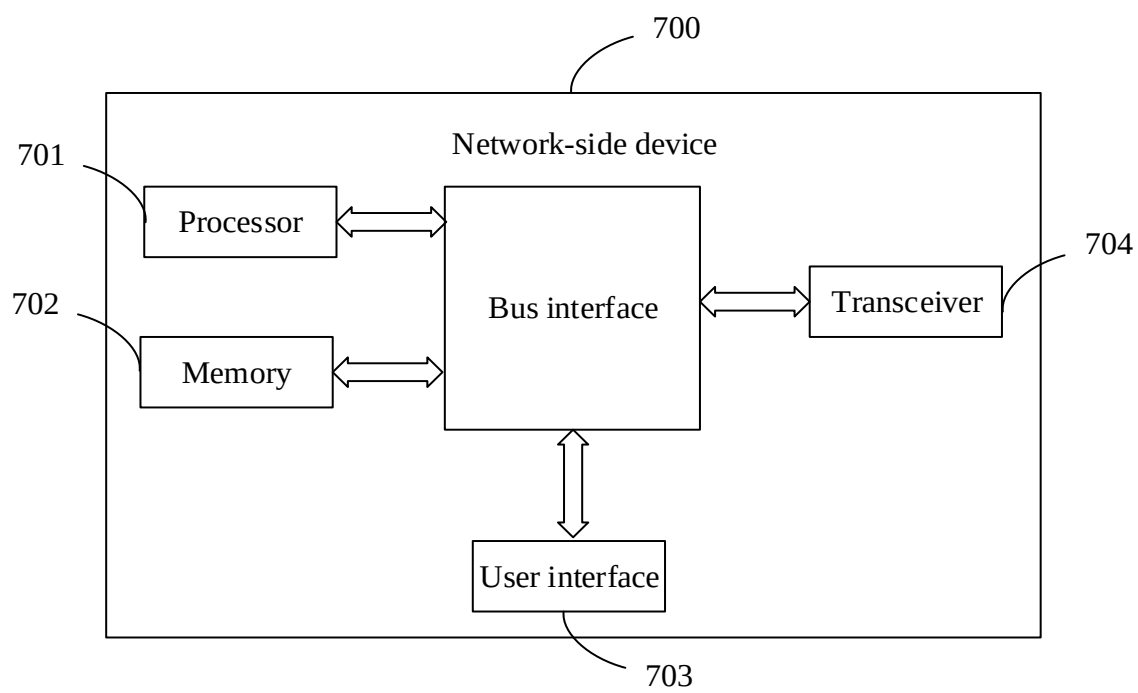


FIG. 7