

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033331 A1

(51) International Patent Classification⁷: **B65D 30/24**

(21) International Application Number:
PCT/KR2003/002084

(22) International Filing Date: 10 October 2003 (10.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20-2002-0030292 10 October 2002 (10.10.2002) KR
20-2003-0031455 7 October 2003 (07.10.2003) KR

(71) Applicant and

(72) Inventor: LEE, Kyul-Joo [KR/KR]; 107-302 Mijoo Apt.,
1875-2 Jeongwang-dong, Siheung, Gyeonggi-do 429-767
(KR).

(74) Agent: C & S PATENT AND LAW OFFICE; C-2306
Daelim Acrotel, 467-6 Dogok-dong, Kangnam-gu, Seoul
135-971 (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: CHECK VALVE FOR VACUUM PACKING BAGS

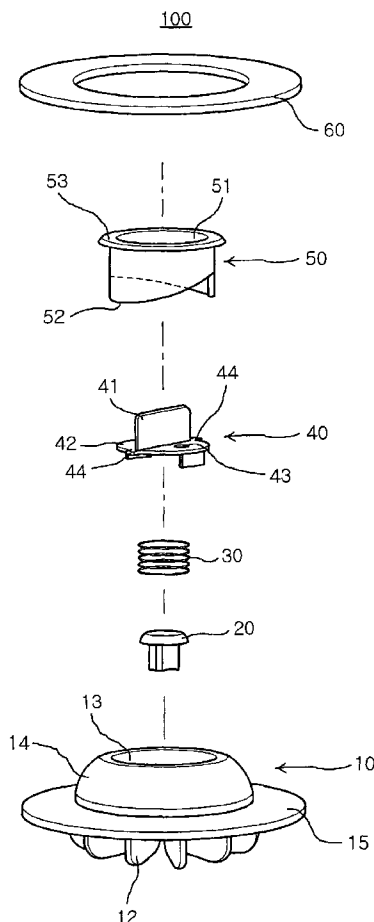

(57) Abstract: A check valve (100, 200) for vacuum packing bags, installed on a suction nozzle (2) of a packing bag (1) to discharge air from the bag 1 to the outside. The check valve (100, 200) comprises: a valve body (10, 210) including a hole (11, 211) formed at a central of a bottom of the valve body (10, 210), an inner space defined within the valve body (10, 210) above the hole (11, 211) and a projected section (14, 214) for being inserted into the suction nozzle (2), the projected section (14, 214) being reduced in diameter as extended away from the hole (11, 211); and means for opening and closing the hole (11, 211) installed in the inner space of the valve body (10, 210).

WO 2004/033331 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.