



- (51) **International Patent Classification:**
B05B 7/00 (2006.01) *B05B 11/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2013/056901
- (22) **International Filing Date:**
2 April 2013 (02.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/458,318 27 April 2012 (27.04.2012) US
- (71) **Applicant:** PIBED LIMITED [GB/GB]; Denby Hall Way, Denby, Ripley Derbyshire DE5 8JZ (GB).
- (72) **Inventors:** BANKS, Stewart; Casa Elizabeth, Lot 17, Vale Centenes, P-8400 Alfanzina Near Carvoiro (PT). LANG, Christopher James; 35 Bendigo Lane, Nottingham Nottinghamshire NG2 4EH (GB). LIMBERT, Dean Philip; 3 Orlando Court, Chellaston, Derby Derbyshire DE73 5BJ (GB). CREAGHAN, David Michael Ross; 21 Abbey Lane, Darley Abbey, Derby Derbyshire DE22 1DG (GB).
- (74) **Agent:** LECOMTE & PARTNERS; P.O.Box 1623, L-1016 Luxembourg (LU).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

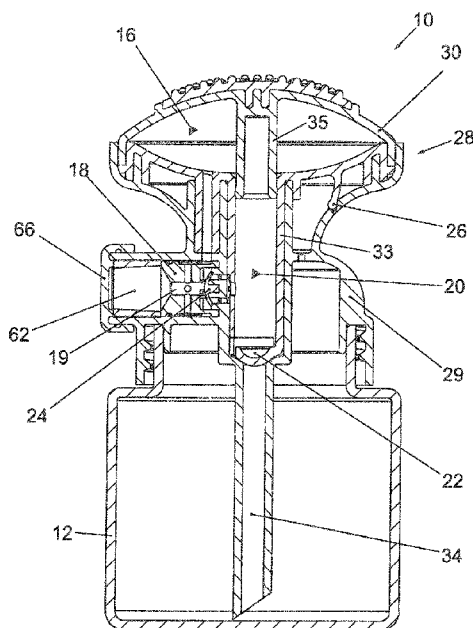
(54) **Title:** A FOAM DISPENSER

FIG. 2

(57) **Abstract:** A foam assembly connectable to a liquid container includes a main pump body, a resiliently deformable piston dome, an air chamber, a liquid chamber, a mixing zone and a porous member. The main pump body has an exit nozzle with the porous member therein. The air chamber and the liquid chamber are each defined by the piston dome and the main pump body. The liquid chamber has a liquid inlet valve and a liquid outlet valve. The mixing zone is in flow communication with the air chamber and the liquid chamber. The volume of the air chamber and the liquid chamber are each dependent on the position of piston dome and during an activation stroke the piston moves from the at rest position to the depressed position and responsively the volume of the air chamber and the volume of the liquid chamber are reduced.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*