



(51) International Patent Classification:
E02D 7/00 (2006.01)

(21) International Application Number:
PCT/SG2008/000284

(22) International Filing Date:
31 July 2008 (31.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **YK EQUIPMENT PTE LTD** [SG/SG]; 195 Pearl's Hill Terrace, #02-08A, Singapore 168976 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WONG, Yew, Kee** [SG/SG]; 46 Mount Sinai Road, Henry Park, Singapore 276874 (SG).

(74) Agent: **KOH, Patsy**; Tan Peng Chin LLC, 30 Raffles Place, #11-00 Chevron House, Singapore 048622 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

— with amended claims (Art. 19(1))

(54) Title: A PILING DEVICE

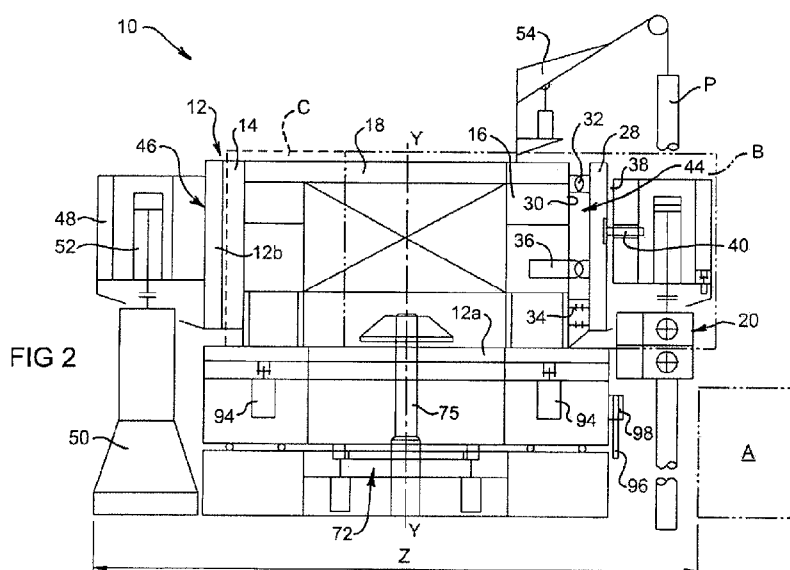

(57) Abstract: A piling device (10) including a support frame (12), a pile gripping mechanism (20) for gripping a pile and a pile driving mechanism (24) for driving the pile into the ground. The pile gripping mechanism (20) and the pile driving mechanism (20) are connected to and supported by the frame (12). The device (10) also includes a rotation assembly (72) to facilitate rotation of the support frame (12) relative to a rotation footing (74) about a rotation axis.