



- (51) International Patent Classification:
H02G 5/00 (2006.01)
- (21) International Application Number:
PCT/IB2015/058848
- (22) International Filing Date:
16 November 2015 (16.11.2015)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (30) Priority Data:
BS2014A000191 17 November 2014 (17.11.2014) IT
- (71) Applicant: CBW S.R.L. [IT/IT]; Via Campo Lungo
12/14, 25039 Travagliato (BS) (IT).
- (72) Inventor: REGOSA, Mattia; Via Ambaraga 40, 25133
Brescia (IT).
- (74) Agent: GALASSI, Alessandro; c/o PGA SRL, Milano,
Succursale di Lugano, Via Castagnola, 21c, 6900 Lugano
(CH).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONDUCTIVE PLATE PARTICULARLY OF A JUNCTION BLOCK OF BUSBARS AND JUNCTION BLOCK
COMPRISING SAID CONDUCTIVE PLATE

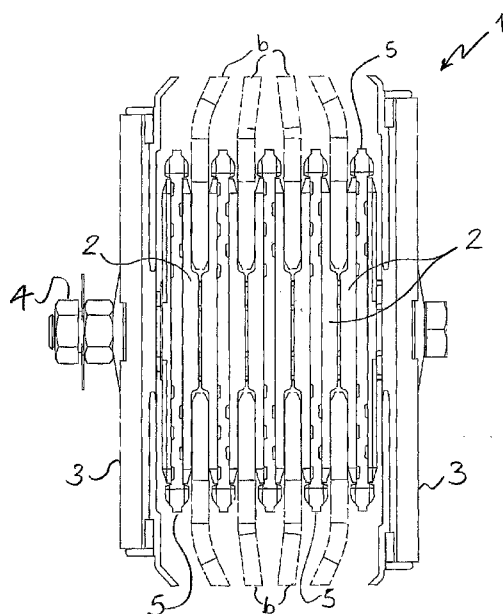


Fig. 1

(57) Abstract: The present invention makes available a conductive plate (2) for a junction block (1) for busbars, having a pair of faces opposite each other and at least one through hole (6) extending between the faces of the conductive plate, on one of the faces said conductive plate comprising a protruding portion (7) through which the at least one hole (6) passes, and wherein, at the protruding portion, the thickness of the plate is greater than the thickness of the remaining portion of the conductive plate; the invention also makes available a junction block for electrically connecting busbars and comprising a plurality of conductive plates of the above-mentioned type.