

(51) International Patent Classification:
H04B 10/13 (2006.01)(21) International Application Number:
PCT/US2010/061702(22) International Filing Date:
22 December 2010 (22.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/289,862 23 December 2009 (23.12.2009) US
12/751,442 31 March 2010 (31.03.2010) US(71) Applicant (for all designated States except US): **ALCATEL-LUCENT USA INC.** [US/US]; 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WINZER, Peter, J.** [US/US]; 209 Cashell Drive, Aberdeen, NJ 07747 (US).(74) Agent: **MC CABE, John, F.**; ALCATEL-LUCENT USA INC., Attention: Docket Administrator - Room 3D-201, 600-700 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: COMMUNICATION VIA A MULTIMODE CONSTELLATION

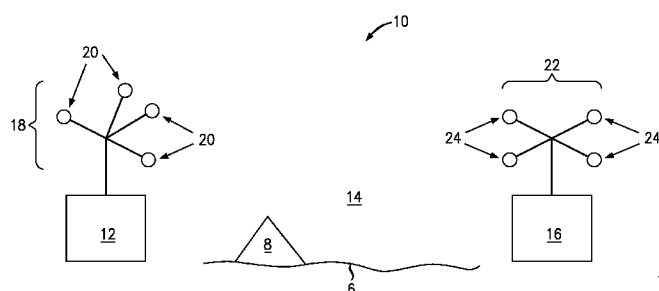


FIG. 1

(57) Abstract: An apparatus includes a digital data transmitter capable of sequentially exciting different sets of one or more propagation modes in a physical communication channel. Each set of one or more propagation modes has a different spatial distribution of transmitted energy in the channel. The digital data transmitter is configured to sequentially change the excited set of one or more propagation modes to transmit a different value of data to the communication channel.