

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2019 年 2 月 7 日 (07.02.2019)



(10) 国际公布号
WO 2019/024103 A1

(51) 国际专利分类号:
H04W 68/00 (2009.01)

广东省广州市天河区花城大道 85 号 3901 房, Guangdong 510623 (CN)。

(21) 国际申请号: PCT/CN2017/096077

(22) 国际申请日: 2017 年 8 月 4 日 (04.08.2017)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: OPPO 广东移动通信有限公司 (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.) [CN/CN]; 中国广东省东莞市长安镇乌沙海滨路 18 号, Guangdong 523860 (CN)。

(72) 发明人: 刘建华 (LIU, Jianhua); 中国广东省东莞市长安镇乌沙海滨路 18 号, Guangdong 523860 (CN)。

(74) 代理人: 广州华进联合专利商标代理有限公司 (ADVANCE CHINA IP LAW OFFICE); 中国

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,

(54) Title: PAGING FAILURE PROCESSING METHOD, ACCESS NETWORK DEVICE, AND CORE NETWORK DEVICE

(54) 发明名称: 处理寻呼失败的方法、接入网设备和核心网设备

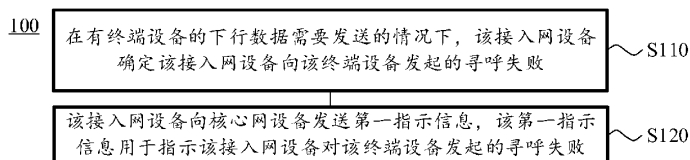


图 2

S110 In a case in which downlink data of a terminal device needs to be sent, an access network device determines that a paging initiated by the access network device to the terminal device fails

S120 The access network device sends first indication information to a core network device, the first indication information being used for indicating that the paging initiated by the access network device to the terminal device fails

(57) Abstract: Disclosed in embodiments of the present application are a paging failure processing method, an access network device, and a core network device. The method comprises: in a case in which downlink data of a terminal device needs to be sent, an access network device determines that a paging initiated by the access network device to the terminal device fails; and the access network device sends first indication information to a core network device, the first indication information being used for indicating that the paging initiated by the access network device to the terminal device fails. By means of the method, the access network device and the core network device in the embodiments of the present application, the data transmission reliability can be improved.

(57) 摘要: 本申请实施例公开了一种处理寻呼失败的方法、接入网设备和核心网设备。该方法包括: 在有终端设备的下行数据需要发送的情况下, 该接入网设备确定该接入网设备向该终端设备发起的寻呼失败; 该接入网设备向核心网设备发送第一指示信息, 该第一指示信息用于指示该接入网设备对该终端设备发起的寻呼失败。本申请实施例的方法、接入网设备和核心网设备, 能够提高数据传输的可靠性。

[见续页]

WO 2019/024103 A1

RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告(条约第21条(3))。