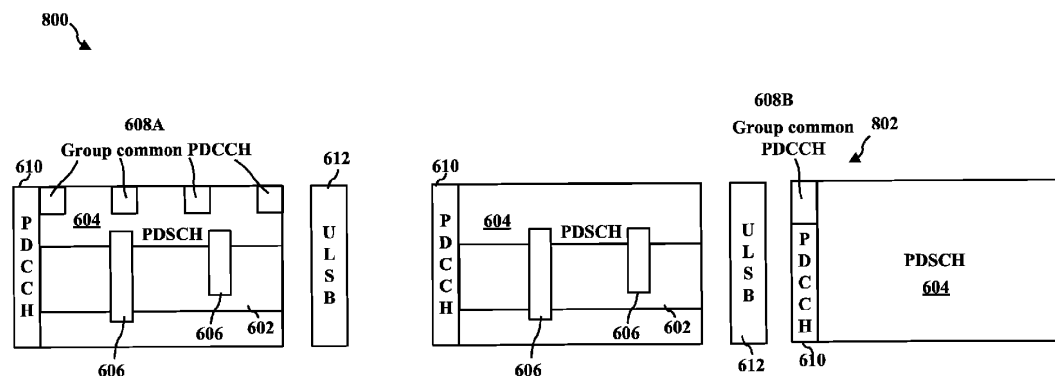


(51) International Patent Classification:
H04L 5/00 (2006.01)(21) International Application Number:
PCT/US2018/021887
(22) International Filing Date:
10 March 2018 (10.03.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/470,075 10 March 2017 (10.03.2017) US
15/917,566 09 March 2018 (09.03.2018) US(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTEN: International IP Administration, 5775 Morehouse
Drive, San Diego, California, US 92121-1714 (US).(72) Inventors: **WANG, Renqiu**; c/o QUALCOMM INCOR-
PORATED, 5775 Morehouse Drive, San Diego, Califor-
nia 92121-1714 (US). **JIANG, Jing**; c/o QUALCOMM IN-
CORPORATED, 5775 Morehouse Drive, San Diego, Cali-
fornia 92121-1714 (US). **XU, Hao**; c/o QUALCOMM IN-
CORPORATED, 5775 Morehouse Drive, San Diego, Cali-fornia 92121-1714 (US). **LI, Chong**; c/o QUALCOMM IN-
CORPORATED, 5775 Morehouse Drive, San Diego, Cali-
fornia 92121-1714 (US).(74) Agent: **HODGES, Jonas J.** et al.; c/o ARENT FOX LLP,
1717 K Street NW, Washington, District of Columbia
20006-5344 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,(54) Title: **ULTRA-RELIABLE LOW-LATENCY COMMUNICATION INDICATION CHANNELIZATION DESIGNS****FIG. 8**

(57) Abstract: In some circumstances, a URLLC may preempt resource. An apparatus may be configured to receive a set of resource blocks from a base station including at least one of eMBB data or URLLC data in a PDSCH. The apparatus may receive a URLLC indicator from the base station. The URLLC indicator may be received embedded within the URLLC data or received separate from the URLLC data within DCI of a PDCCH. The URLLC indicator indicates whether the set of resource blocks includes at least part of the URLLC data. The apparatus may determine, based on the URLLC indicator, whether the set of resource blocks includes the URLLC data and processing the set of resource blocks based on a result of determining whether the set of resource blocks includes the URLLC data.

[Continued on next page]



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))