

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69028 A1

(51) International Patent Classification⁷: **E06B 5/16**

(21) International Application Number: PCT/FI01/00249

(22) International Filing Date: 14 March 2001 (14.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20000600 15 March 2000 (15.03.2000) FI

(71) Applicant and

(72) Inventor: **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon
kuja 3, FIN-04310 Tuusula (FI).

(74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE
(utility model), DK, DK (utility model), DM, DZ, EE, EE
(utility model), ES, FI, FI (utility model), GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US,
UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A FIRE DOOR AND A FIRE PROTECTION SYSTEM

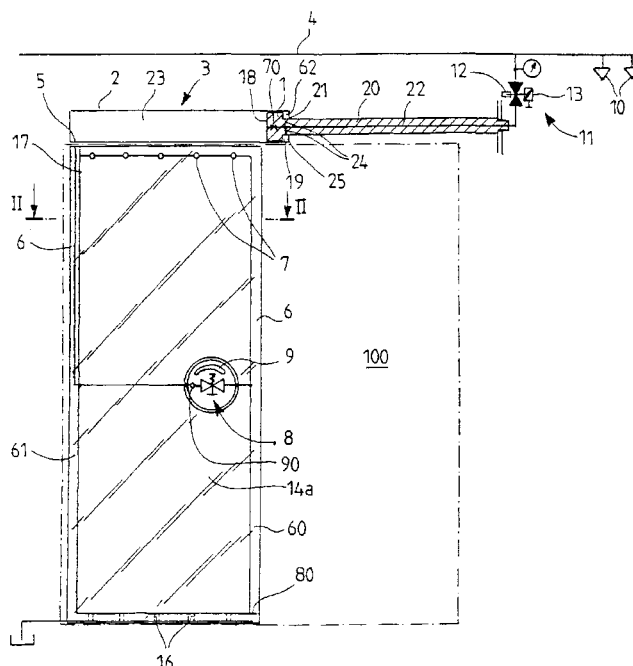

(57) **Abstract:** The invention relates to a hydraulic fire door, especially a sliding door, which can be selectively opened or closed, and the fire door being provided with an actuator (3) for moving said door from an opened position to a closed position. In order to ensure a particularly fire resistant fire door without the heat resistance of the basic structure thereof having to be particularly good, the actuator (3) is arranged to supply aqueous liquid to the fire door in order to cool it using the aqueous liquid. The invention also relates to a fire protection system.