20000426f-9

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 19/20 — A1

(11) International Publication Number: WO 99/46772

(43) International Publication Date: 16 September 1999 (16.09.99)

(21) International Application Number: PCT/JP99/01149

(22) International Filing Date: 10 March 1999 (10.03.99)

(30) Priority Data:
10/62842 13 March 1998 (13.03.98) JP
10/65009 16 March 1998 (16.03.98) JP

(71) Applicant *(for all designated States except US)*: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventors; and


(75) Inventors/Applicants *(for US only)*: KISHIBE, Taro [JP/JP]; 2-33-1-II-404, Higashiyamadai, Nishinomiya-shi, Hyogo 669-1133 (JP). HIRANO, Mikio [JP/JP]; 1-9-60-709, Teraikedai, Tondabayashi-shi, Osaka 584-0073 (JP). UDA, Shigenori [JP/JP]; 1-36-7, Hannan-cho, Abeno-ku, Osaka-shi, Osaka 545-0021 (JP). OTANI, Yuko [JP/JP]; 2-7-5-501, Shikitsunishi, Naniwa-ku, Osaka-shi, Osaka 556-0015 (JP). SENOO, Masashi [JP/JP]; 308-1, Kamihosomi, Kishimoto-cho, Saihaku-gun, Tottori 689-4112 (JP). KUYAMA, Kouji [JP/JP]; 7-19, Nagasuna-cho, Yonago-shi, Tottori 683-3311 (JP). YAMANE, Shuichi [JP/JP]; 781-121, Odaka, Yonago-shi, Tottori 689-3514 (JP). ANDO, Akio [JP/JP]; 9-26-13, Hatagasaki, Yonago-shi, Tottori 683-0845 (JP).

(74) Agents: IWAHASHI, Fumio et al.; Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(81) Designated States: CN, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: TURNTABLE DEVICE AND MANUFACTURING METHOD THEREOF

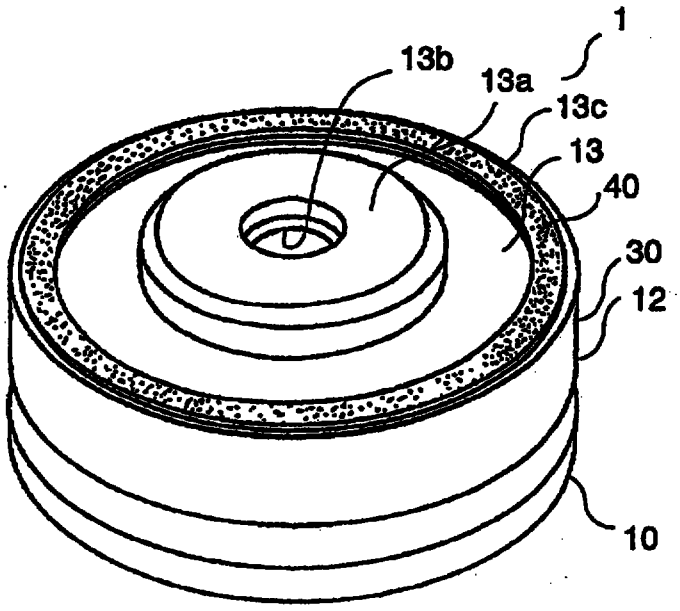

(57) Abstract

A turntable device includes a disc base on the circumference thereof, and the disc base has a hardness more than a given level. The surface of the disc base is roughened at a given level in order to prevent the disc from slipping and adhesion to the disc base. The disc base can compensate surface wobble caused by the disc base. A manufacturing method of the turntable device includes the steps of: a) dripping liquid resin mixed with fine particles on the circumference of the turntable; and b) hardening the resin to form the disc base. The turntable device is good for e.g. CD players, optical disc driving apparatuses.