

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 2002/070769 A1

(51) International Patent Classification⁷: **C22C 38/36**

JÖNSSON, Lennart [SE/SE]; Hööksgatan 2A, S-652 29 Karlstad (SE).

(21) International Application Number:
PCT/SE2002/000372

(74) Agents: **KYLIN, Peter** et al.; Hynell Patenttjänst AB, Patron Carls väg 2, S-683 40 Hagfors/Uddeholm (SE).

(22) International Filing Date: 5 March 2002 (05.03.2002)

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0100737-6 6 March 2001 (06.03.2001) SE

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent


(71) Applicant (*for all designated States except US*): **UDDEHOLM TOOLING AKTIEBOLAG** [SE/SE]; S-683 85 Hagfors (SE).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SANDBERG, Odd** [SE/SE]; Strandvägen 28, S-683 40 Uddeholm (SE).

[Continued on next page]

(54) Title: STEEL ARTICLE

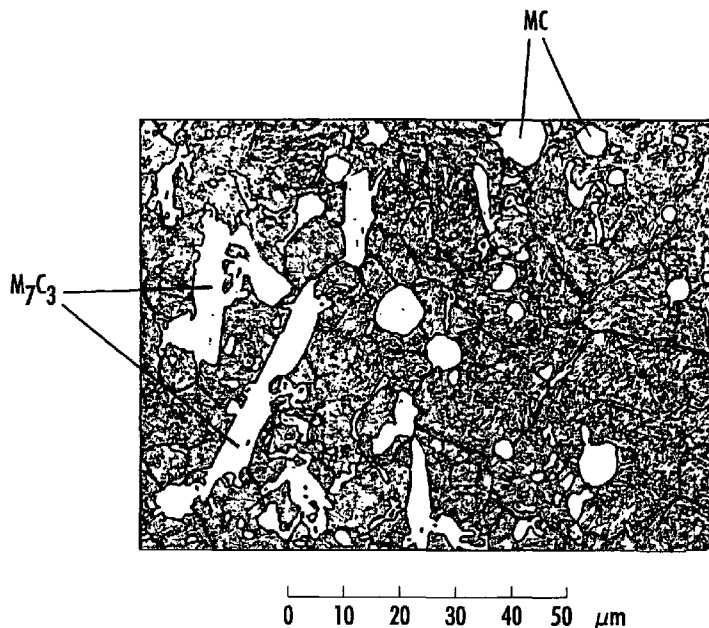

(57) Abstract: A steel article consists of an alloy which contain in weight-%: 1.7 - 2.5 C; 0.1 - 2.0 Si; 0.1 - 2.0 Mn; max 0.2 N; max 0.2 S; 12 16 Cr; 2.1 - 3.5 (Mo + W/2); 5 - 8 V; max 0.1 Nb, balance essentially only iron and unavoidable impurities. The steel has a micro-structure obtainable by a manufacturing of the steel which comprises spray forming of an ingot, the micro-structure of which contains 14 -25 vol-% carbides of mainly MC-type, where M substantially consists of vanadium, of which carbides at least 80 vol-% have a substantially rounded shape and a size in the longest extension of the carbides amounting to 1 - 10 µm, and M₇C₃-carbides, where M substantially consists of chromium, which carbides typically have a more elongated shape than the MC-carbides, of which MC-carbides at least 80 vol-% have a maximal extension amounting to 3-50 µm.

WO 2002/070769 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

(15) Information about Correction:

see PCT Gazette No. 23/2004 of 3 June 2004, Section II

Published:

— *with international search report*

(48) Date of publication of this corrected version:

3 June 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.