(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69017 A1

(51) International Patent Classification[7]: E05B 9/08, 13/00, 15/10, 63/00

(21) International Application Number: PCT/GB01/00731

(22) International Filing Date: 22 February 2001 (22.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0005755.4 11 March 2000 (11.03.2000) GB

(71) Applicant *(for all designated States except US)*: BANHAM PATENT LOCKS LIMTIED [GB/GB]; 233-235 Kensington High Street, London W8 6SF (GB).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: COWPER, Brian, Edward [GB/GB]; 114 Elm Road, New Malden, Surrey KT3 3HP (GB).

(74) Agents: MOSEY, Stephen, George et al.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).


(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOCK

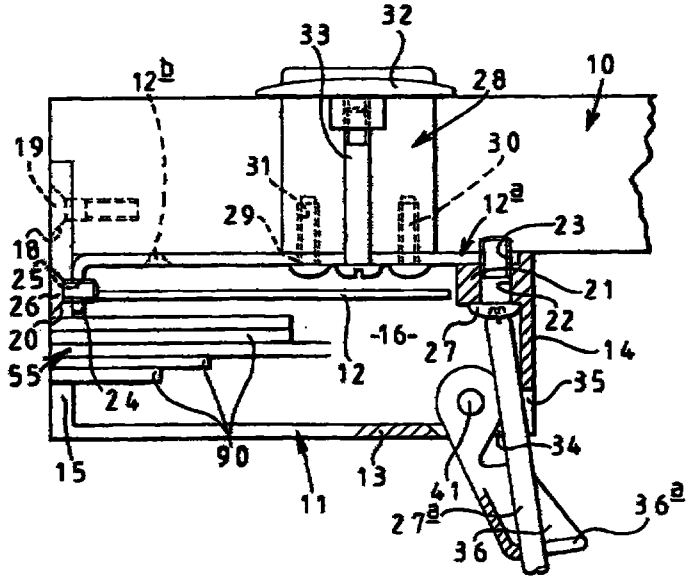

(57) Abstract: A lock for a door (10) comprising a casing (11), a bolt (55) operable to extend from or retract into the casing, a pivoted operating handle (36) operable at one side of the door movable from a rest position to an operating position to retract the bolt, the interior of the casing having a lug (21) through which a screw (27) passes into engagement in a tapped hole (23) in a fixing plate (12a) which is secured to said one side of the door, thereby indirectly securing the casing to the door. A screwdriver blade (27a) can be inserted through an opening (34, 35) in the casing to access the screw (27) when the handle is in its operating position, such access being prevented when the handle is in its rest position, by said handle blocking said opening, the handle being lockable in its rest position from said one side of the wing.

WO 01/69017 A1