



- (51) International Patent Classification:
F03B 3/04 (2006.01) *F03B 3/12* (2006.01)
- (21) International Application Number:
PCT/AU2016/000091
- (22) International Filing Date:
16 March 2016 (16.03.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2015900950 17 March 2015 (17.03.2015) AU
- (71) Applicant: **MAKO TURBINES PTY. LTD.** [AU/AU];
C/- Unit 2, 26A Ralph Street, Alexandria, NSW 2015 (AU).
- (72) Inventor: **MURDOCH, Peter, John**; 141 Booralie Road,
Duffys Forest, NSW 2084 (AU).
- (74) Agent: **SPRUSON & FERGUSON**; G.P.O. Box 3898,
Sydney, New South Wales 2001 (AU).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: A ROTOR FOR AN ELECTRICITY GENERATOR

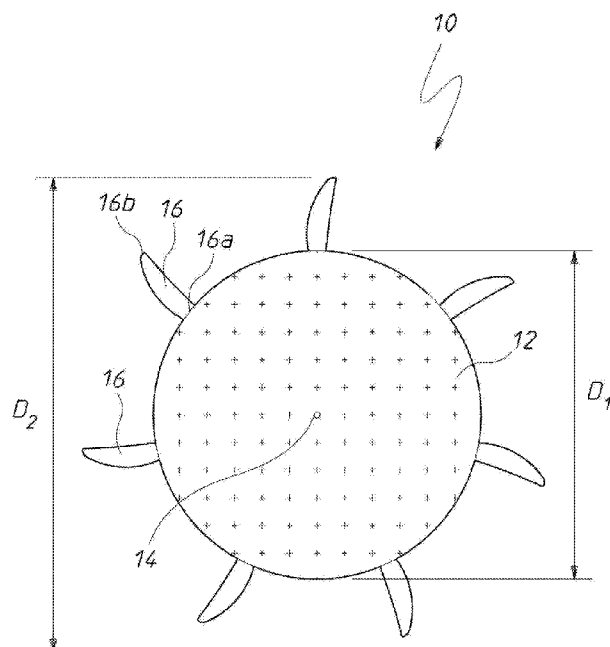


FIG. 1

(57) Abstract: A rotor (10) for a hydro-powered electricity generator. The rotor (10) includes a hub (12) and a plurality of blades (16). The hub (12) has a circular cross sectional shape and a longitudinal rotational axis (14). The plurality of blades (16) each have a proximal root (16a) and a distal tip (16b). Each of the blade roots (16a) are mounted to the hub (12) at the widest part thereof (D1). The ratio between the diameter of the tips (16b) of the blades to the diameter of the widest part (D1) of the hub (12) is less than about 2:1.

