



(43) International Publication Date
23 December 2015 (23.12.2015)

(51) International Patent Classification:
F16L 55/162 (2006.01)

(21) International Application Number:
PCT/IB2015/054554

(22) International Filing Date:
16 June 2015 (16.06.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/012,762 16 June 2014 (16.06.2014) US

(71) Applicant: **FYFE CO. LLC** [US/US]; 3940 Ruffin Road,
Suite C, San Diego, CA 92123 (US).

(72) Inventors: **ARNOLD, Scott**; 623 Seabright Lane, Solana
Beach, CA 92075 (US). **JIMENEZ, Tomas**; 5661 Adobe
Falls Road, Unit C, San Diego, CA 92120 (US). **DE-
LETTO, Nickolas**; 461 Robin Hill Drive, Escondido, CA
92026 (US).

(74) Agents: **JAMES, Kurt F.** et al.; Senniger Powers LLP,
100 North Broadway, 17th Floor, St. Louis, MO 63102
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: REPAIR OF PIPES

FIG. 2

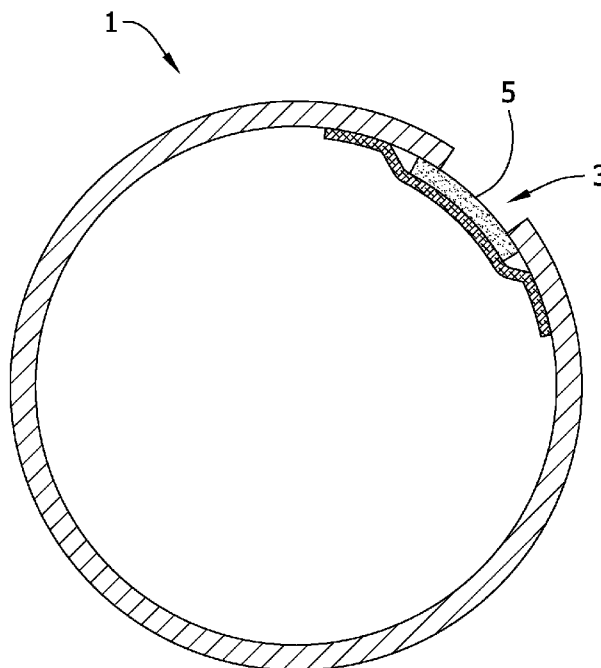

(57) Abstract: A method of repairing a section of a pipe (1) including a breach (3) in the pipe. A surface of a wall of the pipe is prepared generally around the breach (3). A piece of conformable material (5) of the type capable of carrying a curable polymer is sized in relation to a size of the breach (3). The sized piece of conformable material (5) is applied to the prepared surface so that the breach (3) is covered by the piece of conformable material (5). The piece of conformable material (5) is impregnated with a curable polymer. The curable polymer is cured within the piece of conformable material (5) thereby to seal the breach (3) against egress of groundwater into the pipe (1).



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* — *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- Published:**
- *with international search report (Art. 21(3))*