



- (51) International Patent Classification:
E21B 43/12 (2006.01) *E21B 43/08* (2006.01)
- (21) International Application Number:
PCT/US2013/036042
- (22) International Filing Date:
10 April 2013 (10.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) Inventors: **KANG, James, Jun**; 5201 Miler Ave. Apt 3, Dallas, TX 75206 (US). **FRIPP, Michael, Linley**; 3826 Cemetery Hill Road, Carrollton, TX 75007 (US).
- (74) Agent: **YOUST, Lawrence, R.**; LAWRENCE YOUST PLLC, One Waterway Court, Suite 3B, The Woodlands, TX 77380 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

- (54) Title: FLOW CONTROL SCREEN ASSEMBLY HAVING AN ADJUSTABLE INFLOW CONTROL DEVICE

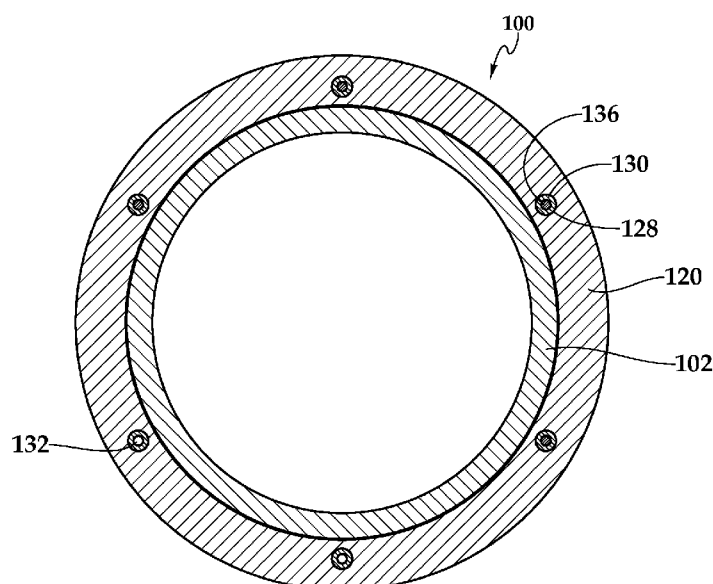


Fig. 2E

(57) Abstract: A well system has a fluid flow path for the inflow of production fluid. An inflow control device is disposed within the fluid flow path. The inflow control device has at least first and second fluid passageways. A first plug is disposed within the first fluid passageway and is operable to restrict fluid flow therethrough. The first plug is operably removable from the first fluid passageway responsive to a first stimulus. A second plug is disposed within the second fluid passageway and is operable to restrict fluid flow therethrough. The second plug is operably removable from the second fluid passageway responsive to a second stimulus, wherein the first stimulus is different from the second stimulus.