

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number
WO 2004/085161 A1

(51) International Patent Classification⁷: **B41J 2/045**,
2/055

(21) International Application Number:
PCT/JP2004/003919

(22) International Filing Date: 23 March 2004 (23.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-079443 24 March 2003 (24.03.2003) JP
2003-097592 1 April 2003 (01.04.2003) JP
2003-364294 24 October 2003 (24.10.2003) JP

(71) Applicant (for all designated States except US): **RICOH
COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome,
Ohta-ku, Tokyo 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OGATA, Kenichi**

[JP/JP]; 3-5-203, Katsuradai 1-chome, Aoba-ku, Yokohama-shi, Kanagawa 2270034 (JP). **YOSHIDA, Takahiro** [JP/JP]; 1391-22-201, Hase, Atsugi-shi, Kanagawa 2430036 (JP). **EGUCHI, Hiroto** [JP/JP]; 3-4-410, Chuorinkan 6-chome, Yamato-shi, Kanagawa 2420007 (JP).


(74) Agent: **ITOH, Tadahiko**; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 1506032 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: RECORDING HEAD, CARRIAGE AND IMAGE FORMING APPARATUS

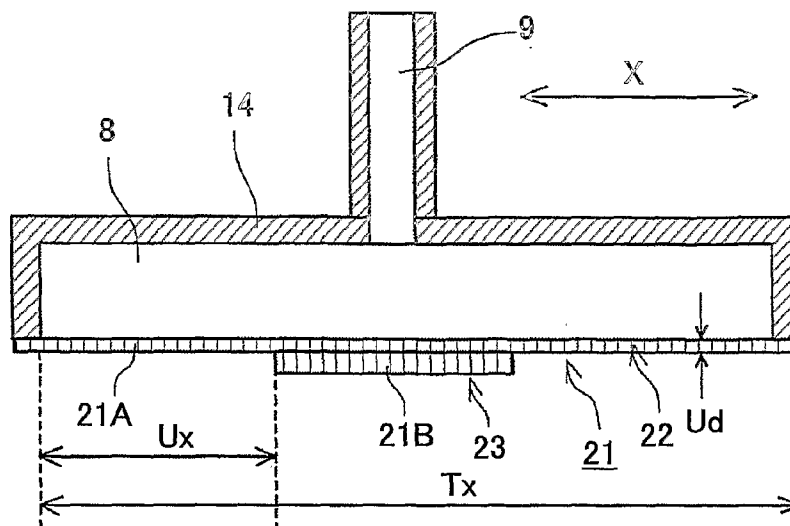

(57) Abstract: A recording head is provided with a plurality of nozzles for ejecting a fluid, a plurality of pressure-applied chambers arranged in a predetermined direction and each communicating with a corresponding one of the nozzles, and a common chamber having a plurality of wall surfaces and configured to supply the fluid to the pressure-applied chambers. At least one of the wall surfaces of the common chamber, along the predetermined direction, has a pressure absorbing surface with a rigidity lower than those of other wall surfaces and configured to absorb a pressure change, and the pressure absorbing surface is formed by a pressure absorbing member having a non-uniform thickness.

WO 2004/085161 A1



GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.