



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



G00002

(43) International publication date

4 August 2005 (04.08.2005)

PCT

(10) International publication number

WO 2005/071774 A1

(51) International patent classification⁷:
2/20, 2/34, 2/04

H01M 2/02,

(72) Inventors; and

(21) International application number: PCT/DE2004/002587

(22) International filing date: 23 November 2004 (23.11.2004)

(25) Language of filing:

German

(26) Language of publication:

German

(75) Inventors/Applicants (US only): BECHTOLD, Dieter [DE/DE]; Chattenweg 28, 61118 Bad Vilbel (DE). JOSWIG, Ralf [DE/DE]; Ahornring 22, 29690 Buchholz (DE). PELZ, Kai [DE/DE]; Bohnstrasse 23, 31832 Springe (DE).

(74) Attorneys: GERSTEIN, Joachim; c/o Gramm, Lins & Partner GbR, Theodor-Heuss-Str. 1, 38122 Braunschweig (DE).

(30) Data relating to the priority:

10 2004 003 066.9 21 January 2004 (21.01.2004) DE

(81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,


(71) Applicant (for all designated States except US): VARTA AUTOMOTIVE SYSTEMS GMBH [DE/DE]; Am Leineufer 51, 30419 Hannover (DE).

[continued on next page]

As printed

(54) Title: PRISMATIC BATTERY AND METHOD FOR PRODUCING THE LATTER

(54) Bezeichnung: PRISMATISCHER AKKUMULATOR UND VERFAHREN ZUR HERSTELLUNG DESSELBEN

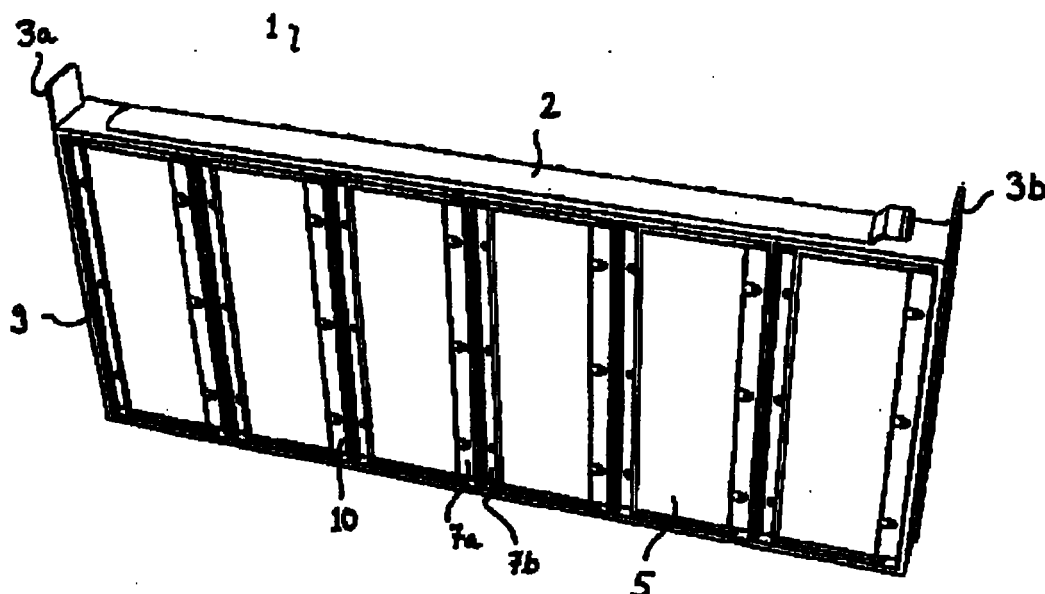

(57) Abstract: The invention relates to a prismatic battery (1) comprising a housing (9) containing a plurality of cell cases (8), which are separated from one another by electrically insulating partitions (10), and plate stacks (5), which are formed from stacked electrode plates (6), one plate stack (5) being located in each cell case (8). Said battery has contact connection plates (11) that extend respectively along the partitions (10). The contact connection plates (11) lying on opposite sides of a partition (10) are electrically interconnected through the partition (10) and the contacts of the plate stacks (5) are electrically connected to their assigned contact connection plates (11).

[continued on next page]

WO 2005/071774 A1

LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,

IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO Patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

- of inventorship (Rule 4.17(iv)) for the following designation US.

Published:

- With International Search Report.

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.

(57) Zusammenfassung: Ein prismatischer Akkumulator (1) mit einem Gehäuse (9), das eine Mehrzahl von durch elektrisch isolierende Zwischenwände (10) voneinander getrennte Zellgefäße (8) hat, und mit aus gestapelten Elektrodenplatten (6) gebildeten Plattenstapeln (5), wobei in jedem der Zellgefäße (8) eines Plattenstapels (5) aufgenommen ist, hat sich entlang der Zwischenwände (10) jeweils erstreckende Kontaktverbinderbleche (11), wobei die sich an einer Zwischenwand (10) gegenüberliegenden Kontaktverbinderbleche (11) durch die Zwischenwand (10) hindurch miteinander elektrisch leitend verbunden und die Kontakte der Plattenstapel (5) mit den zugeordneten Kontaktverbinderblechen (11) elektrisch leitend verbunden sind.