

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 May 2003 (15.05.2003)

PCT

(10) International Publication Number
WO 03/041102 A1

- (51) International Patent Classification⁷: **H01H 9/20** (74) Agent: **SAMMONS, Barry, E.**; Quarles & Brady LLP, 411 East Wisconsin Avenue, Milwaukee, WI 53202 (US).
- (21) International Application Number: PCT/US02/33436
- (22) International Filing Date: 21 October 2002 (21.10.2002) (81) Designated States (*national*): AU, SG, US.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- (26) Publication Language: English
- (30) Priority Data:
60/335,227 2 November 2001 (02.11.2001) US
Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant (*for all designated States except US*): **BRADY WORLDWIDE, INC.** [US/US]; 2221 West Camden Road, Milwaukee, WI 53209 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **BENDA, Steven, J.** [US/US]; 13657 10th Street SW, Cokato, MN 55321 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: CIRCUIT BREAKER LOCK-OUT ASSEMBLY

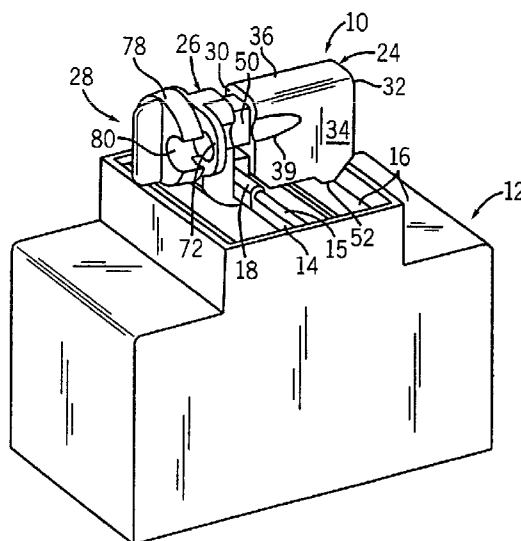

(57) Abstract: The present invention provides a switch lock-out assembly (10) for locking out a switch (15) having a pivotally mounted switch tongue (14) moveable between a first position and a second position about a pivot axis. The switch lock-out assembly (10) includes a body (24) having a first end and a second end. A first clamping surface (70) is formed on the body proximal the first end. A clamp jaw (26) has a second clamping surface (54) which is movable relative to the first clamping surface (70) for clamping a switch tongue (14) between the first clamping surface (70) and second clamping surface (54). An engagement surface (52) is formed on the body a distance from the first end, wherein the engagement surface (52) engages the switch (15) when the switch tongue (14) is clamped between the clamping surfaces (70, 54) to prevent movement of the switch from the switch first position to the switch second position.



WO 03/041102 A1