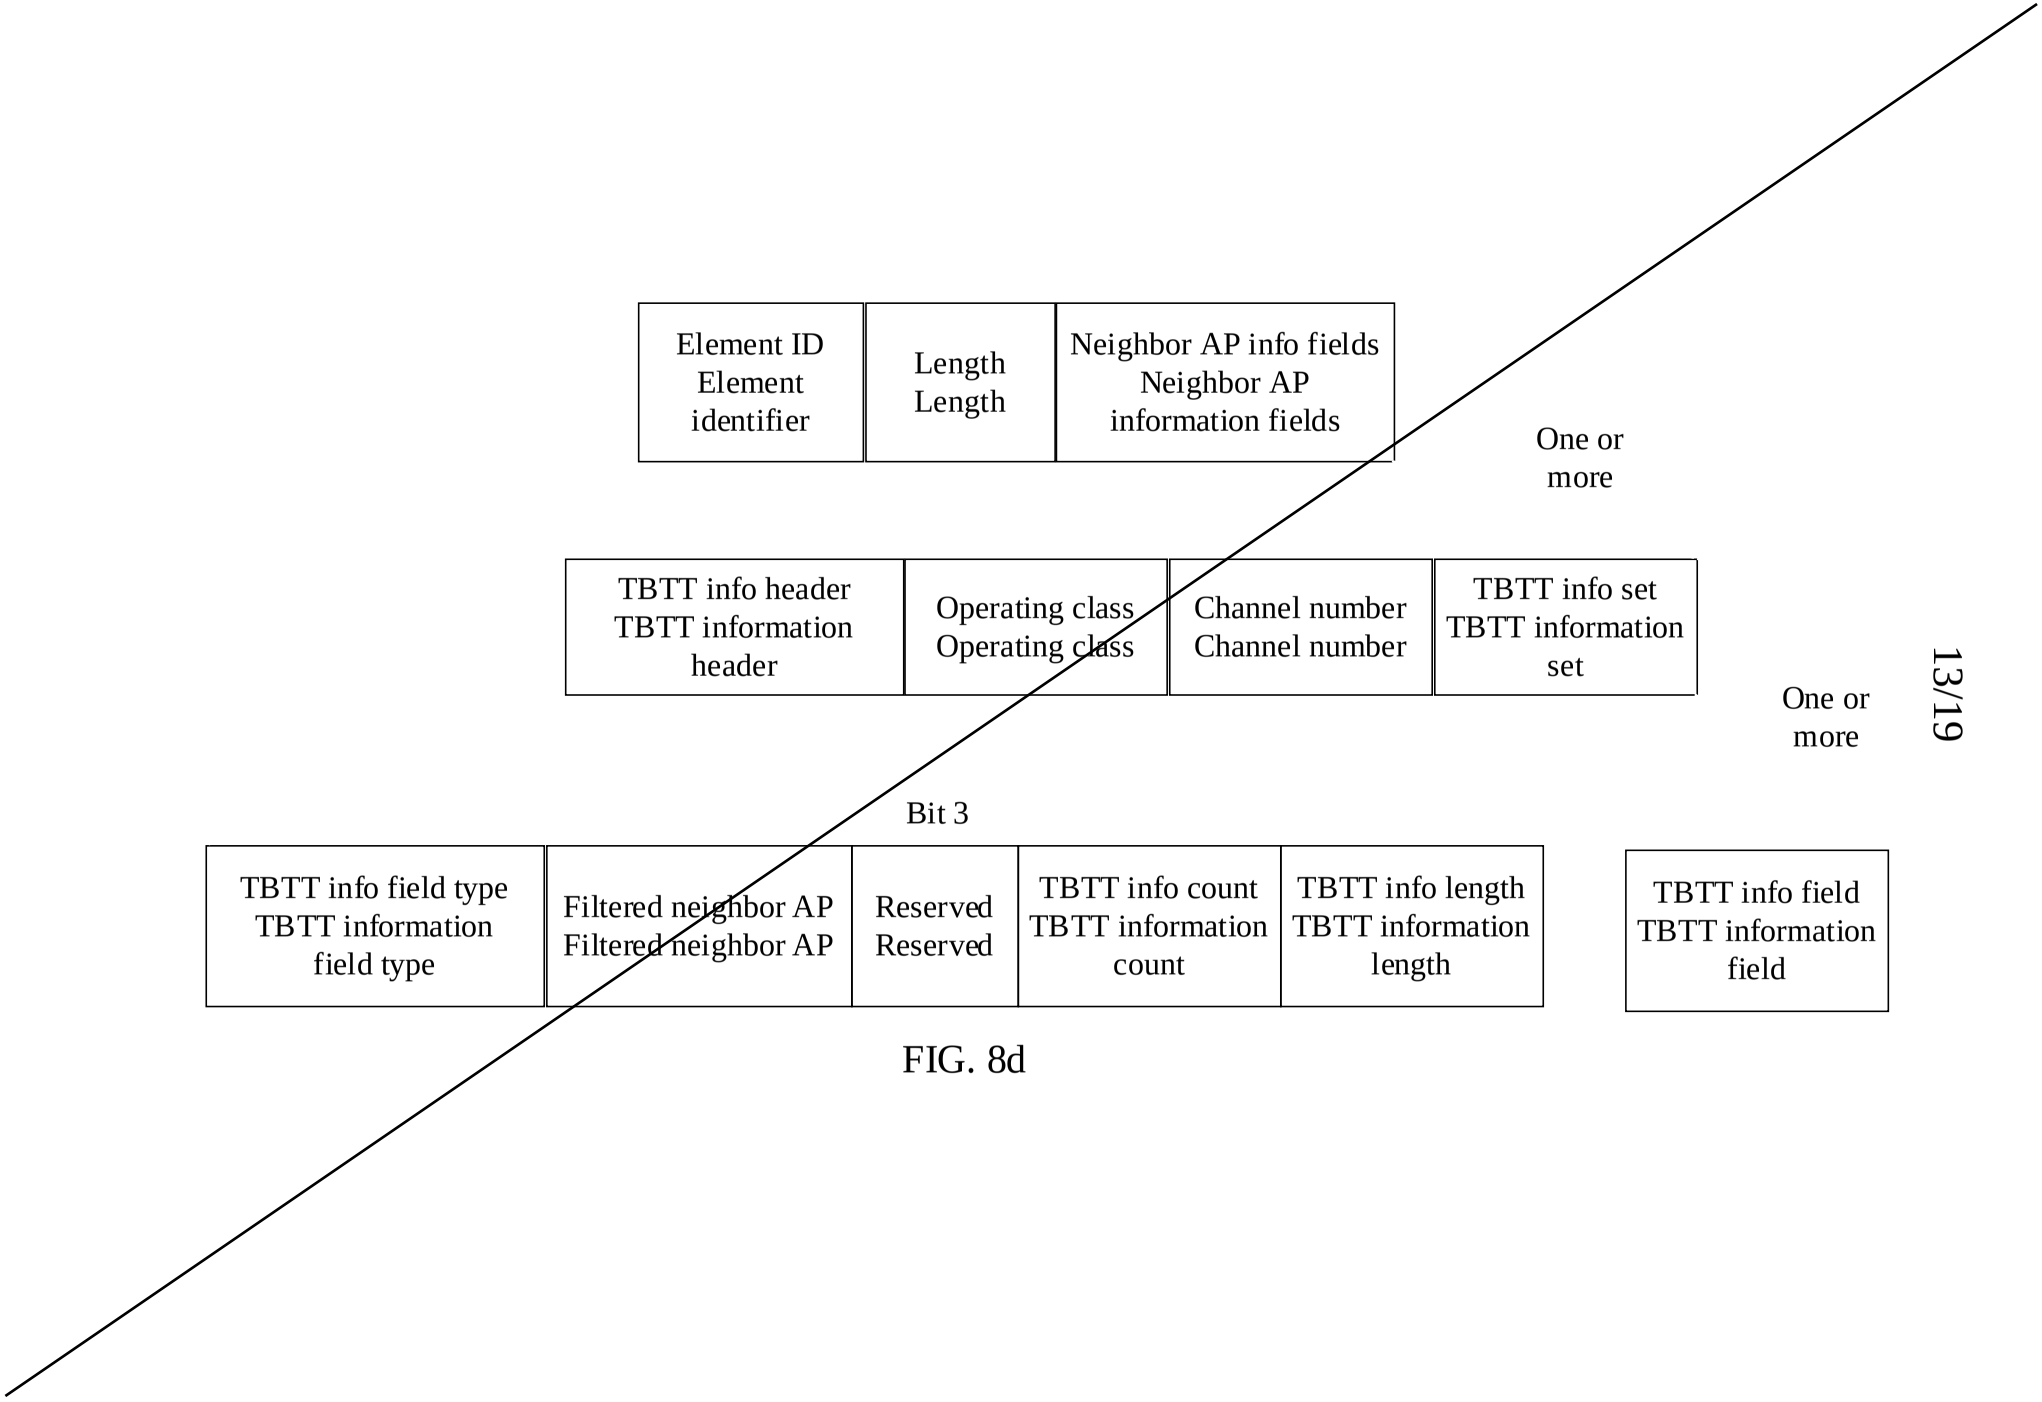

Element ID
Element identifier
Length
Length
Neighbor AP info fields
Neighbor AP information fields
One or more
TBTT info header
TBTT information header
Operating class
Operating class
Channel number
Channel number
TBTT info set
TBTT information set
One or more
Bit 3
TBTT info field type
TBTT information field type
Filtered neighbor AP
Filtered neighbor AP
Reserved
Reserved
TBTT info count
TBTT information count
TBTT info length
TBTT information length
TBTT info field
TBTT information field

FIG. 8d

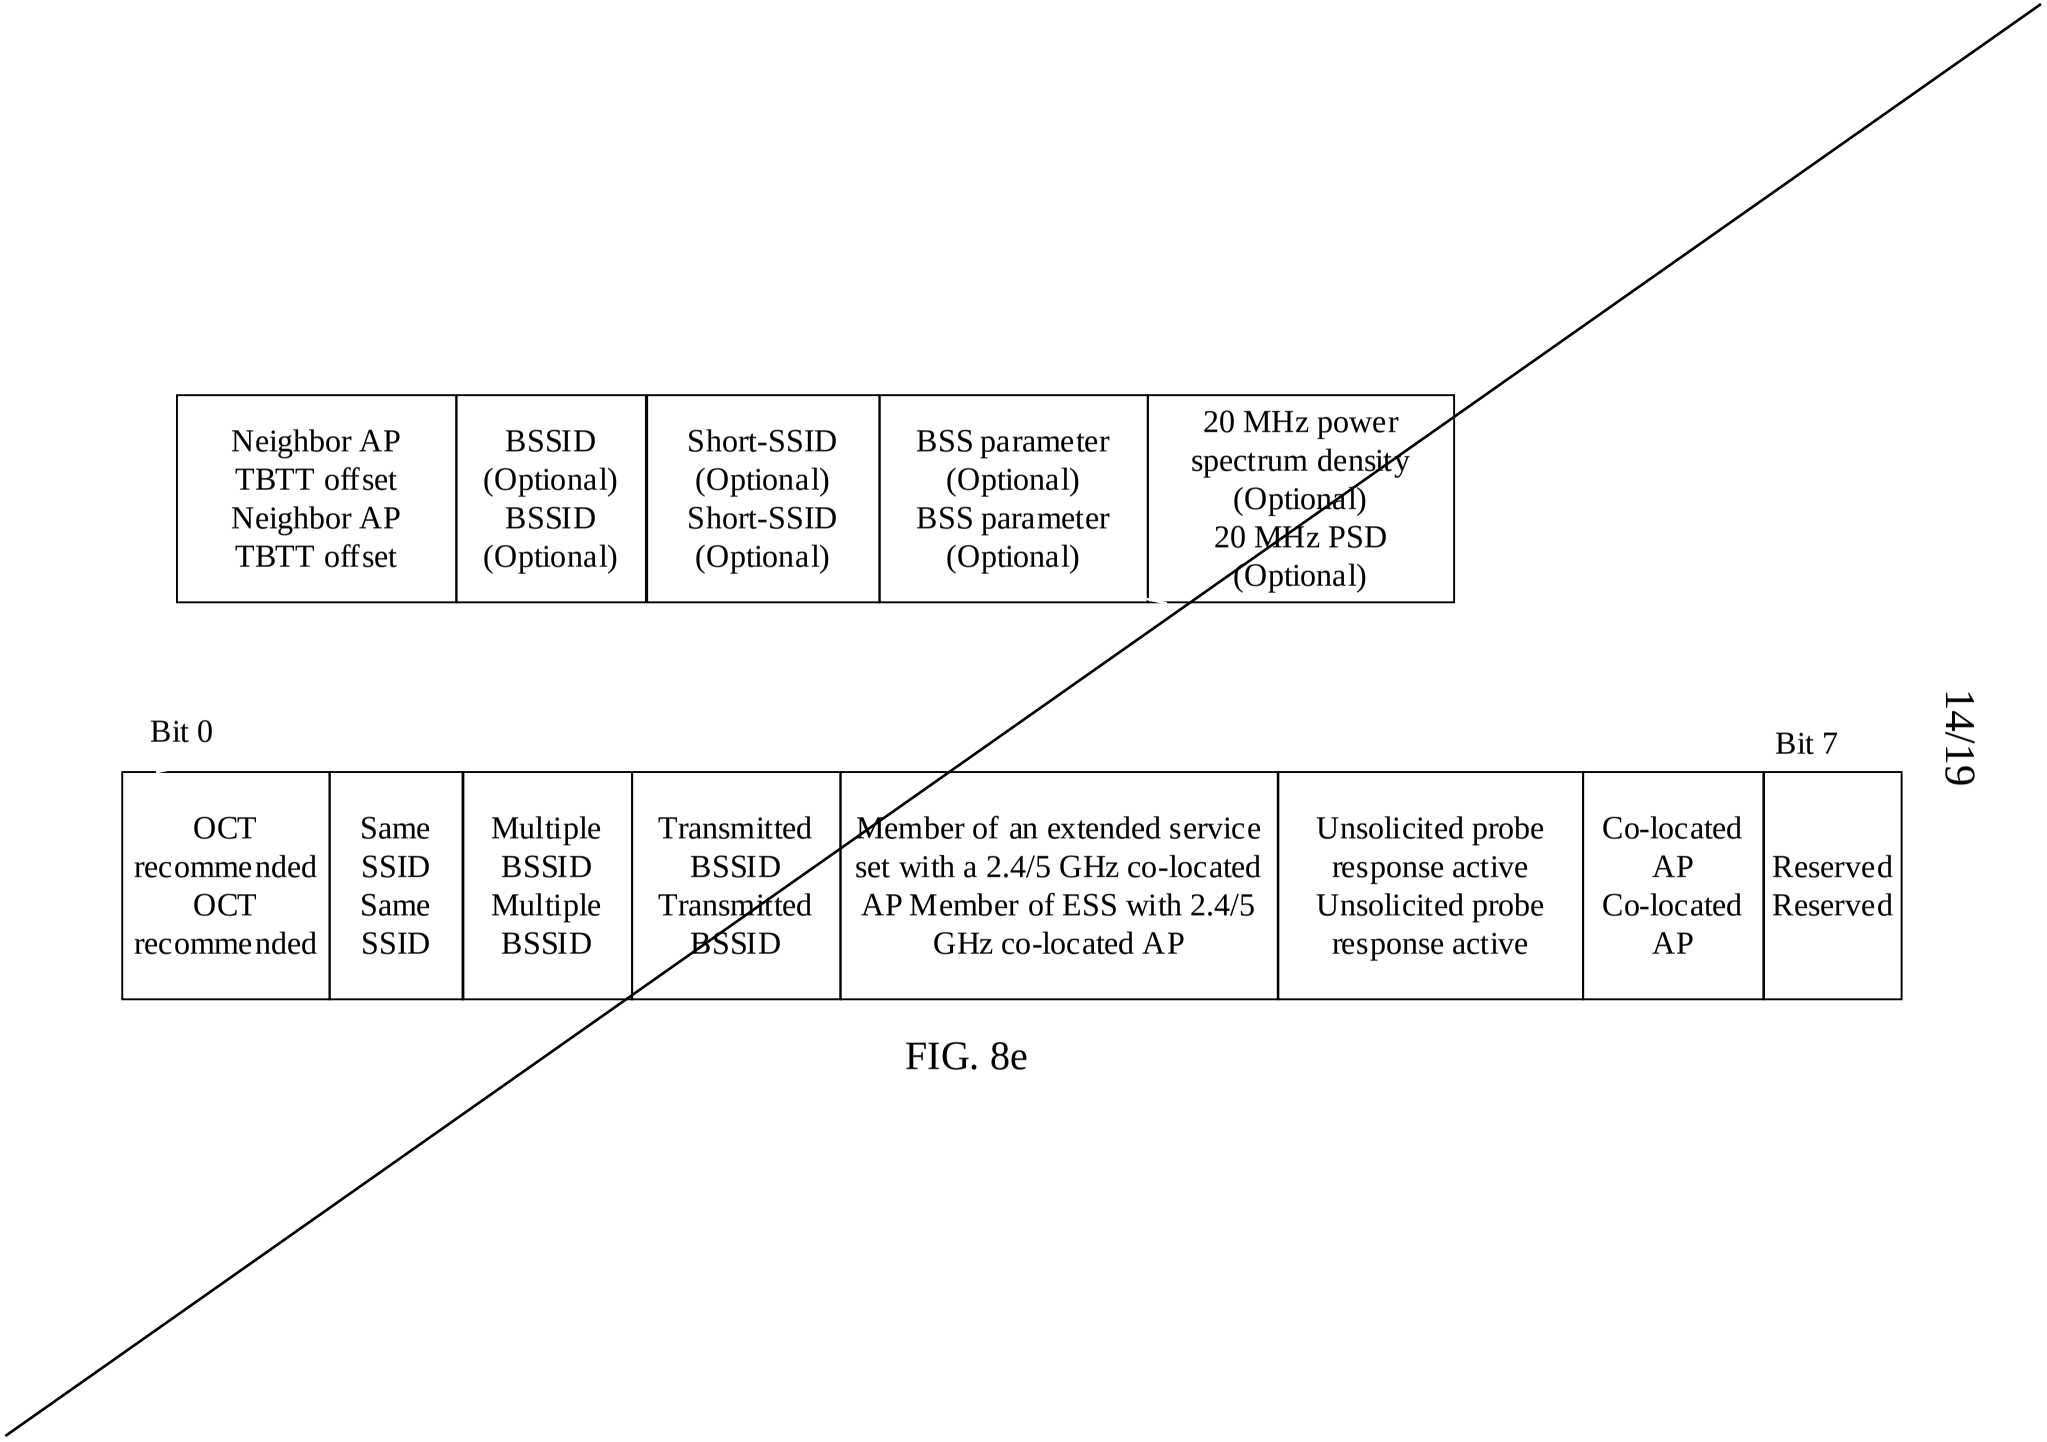

Neighbor AP TBTT offset Neighbor AP TBTT offset
BSSID (Optional) BSSID (Optional)
Short-SSID (Optional) Short-SSID (Optional)
BSS parameter (Optional) BSS parameter (Optional)
20 MHz power spectrum density (Optional) 20 MHz PSD (Optional)
Bit 0
Bit 7
OCT recommended OCT recommended
Same SSID Same SSID
Multiple BSSID Multiple BSSID
Transmitted BSSID Transmitted BSSID
Member of an extended service set with a 2.4/5 GHz co-located AP Member of ESS with 2.4/5 GHz co-located AP
Unsolicited probe response active Unsolicited probe response active
Co-located AP Co-located AP
Reserved Reserved

FIG. 8e

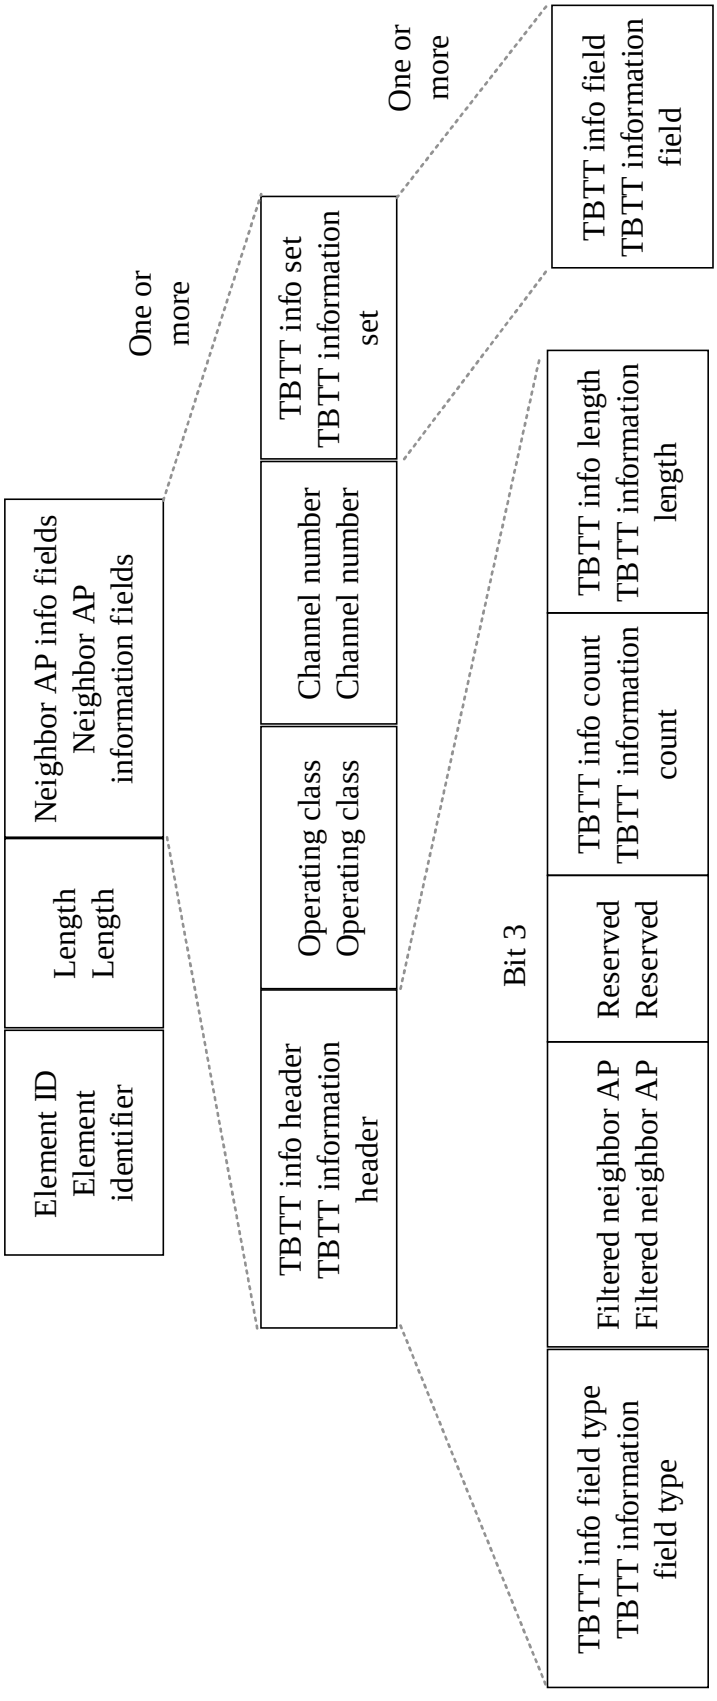

Element ID
Element identifier
Length
Length
Neighbor AP info fields
Neighbor AP information fields
One or more
TBTT info header
TBTT information header
Operating class
Operating class
Channel number
Channel number
TBTT info set
TBTT information set
One or more
TBTT info field type
TBTT information field type
Filtered neighbor AP
Filtered neighbor AP
Reserved
Reserved
TBTT info count
TBTT information count
TBTT info length
TBTT information length
TBTT info field
TBTT information field
Bit 3

FIG. 8d

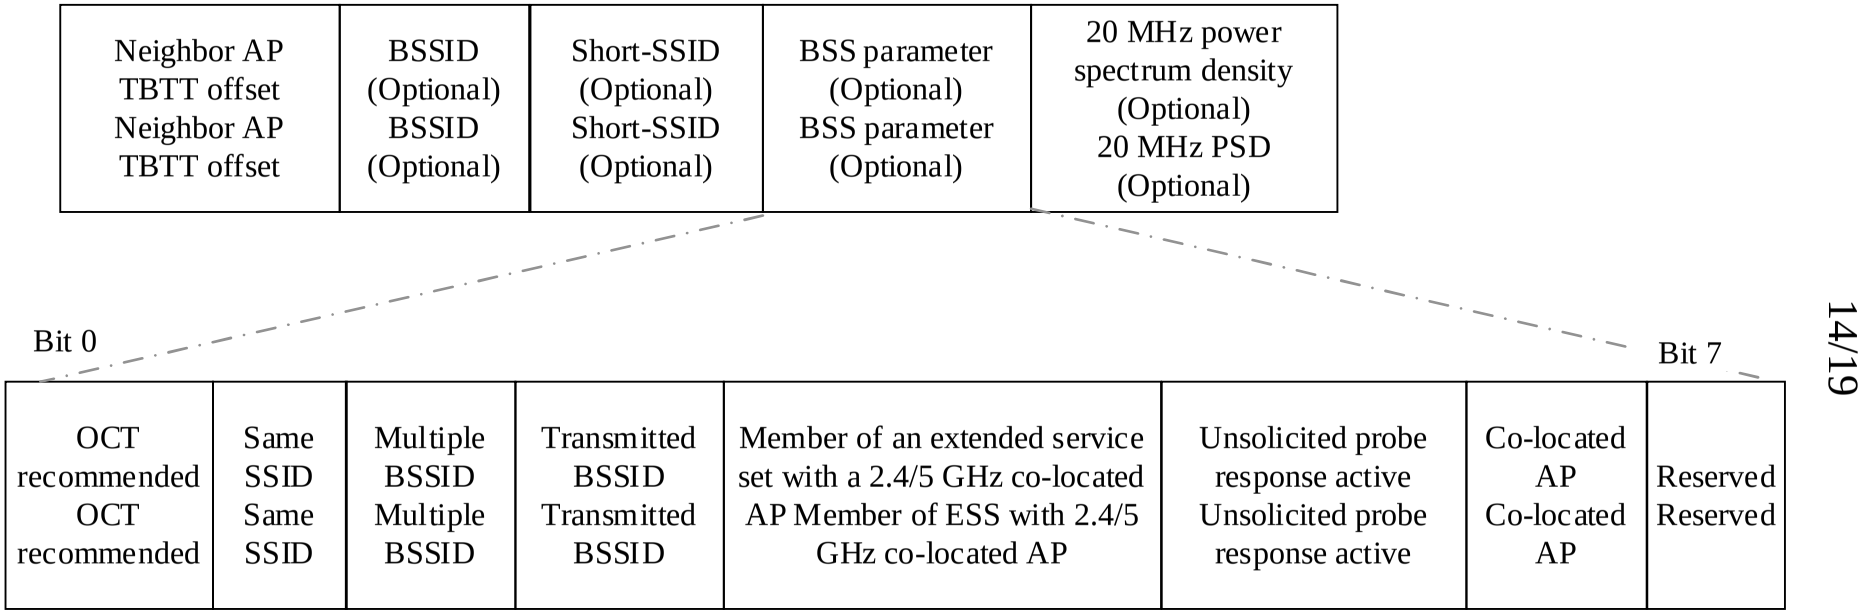

Neighbor AP TBTT offset Neighbor AP TBTT offset
BSSID (Optional) BSSID (Optional)
Short-SSID (Optional) Short-SSID (Optional)
BSS parameter (Optional) BSS parameter (Optional)
20 MHz power spectrum density (Optional) 20 MHz PSD (Optional)
Bit 0
Bit 7
OCT recommended OCT recommended
Same SSID Same SSID
Multiple BSSID Multiple BSSID
Transmitted BSSID Transmitted BSSID
Member of an extended service set with a 2.4/5 GHz co-located AP Member of ESS with 2.4/5 GHz co-located AP
Unsolicited probe response active Unsolicited probe response active
Co-located AP Co-located AP
Reserved Reserved

FIG. 8e