(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
13 March 2014 (13.03.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/039528 A1

(51) International Patent Classification:
E04B 9/04 (2006.01) *E04B 9/24* (2006.01)

(21) International Application Number:
PCT/US2013/058010

(22) International Filing Date:
4 September 2013 (04.09.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/696,424 4 September 2012 (04.09.2012) US

(71) Applicant: **ARMSTRONG WORLD INDUSTRIES, INC.** [US/US]; 2500 Columbia Avenue, Lancaster, PA 17603 (US).

(72) Inventors: **BERGMAN, Todd, M.**; 53 Evergreen Court, Lititz, PA 17543 (US). **WATERS, James, R.**; 204 Great Lawn Circle, Lancaster, PA 17602 (US).

(74) Agent: **FERNANDEZ, Amy M.**; Armstrong World Industries, Inc., 2500 Columbia Avenue, Lancaster, PA 17603 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: CEILING SYSTEM

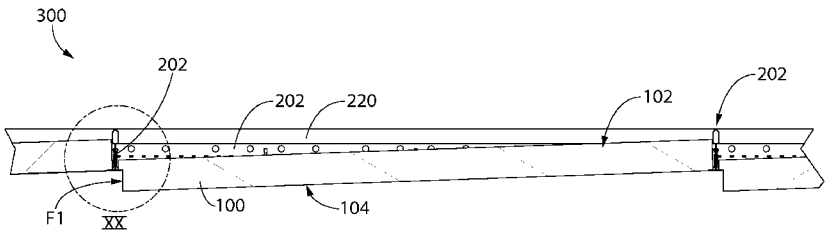


FIG. 19

(57) Abstract: A ceiling system includes an overhead support grid defining a grid opening and a ceiling die positioned in the opening. The ceiling tile includes a first tegular edge and an opposing second edge, to one embodiment, the second edge may be tegular. The first tegular edge may have a different configuration than the first tegular edge so that the ceiling tile rests in an angled position when mounted in the support grid. When mounted, the bottom surface of the ceiling tile is angled with respect to the support grid. The first tegular edge includes an end surface defining an exposed reveal that is visible below the grid. By selecting various horizontal orientations of multiple ceiling tiles in adjacent grid openings in the ceiling system, different artistic patterns may be created. In one embodiment, the ceiling tile has a substantially uniform thickness.

WO 2014/039528 A1