



(51) International Patent Classification:

A61M 25/00 (2006.01) A61M 39/22 (2006.01)
A61M 25/06 (2006.01)

(21) International Application Number:

PCT/EP2014/067573

(22) International Filing Date:

18 August 2014 (18.08.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1314953.9	21 August 2013 (21.08.2013)	GB
1315401.8	29 August 2013 (29.08.2013)	GB
201310527778.3	31 October 2013 (31.10.2013)	CN
201320679130.3	31 October 2013 (31.10.2013)	CN

(71) Applicant: **B. BRAUN MELSUNGEN AG** [DE/DE];
Carl-Braun-Strasse 1, 34212 Melsungen (DE).

(72) Inventor: **WOEHR, Kevin**; Danziger Strasse 2, 34587
Felsberg (DE).

(74) Agents: **KINKELDEY, Daniela** et al.; Maximiliansplatz
22, 80333 Munich (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CATHETER ASSEMBLY

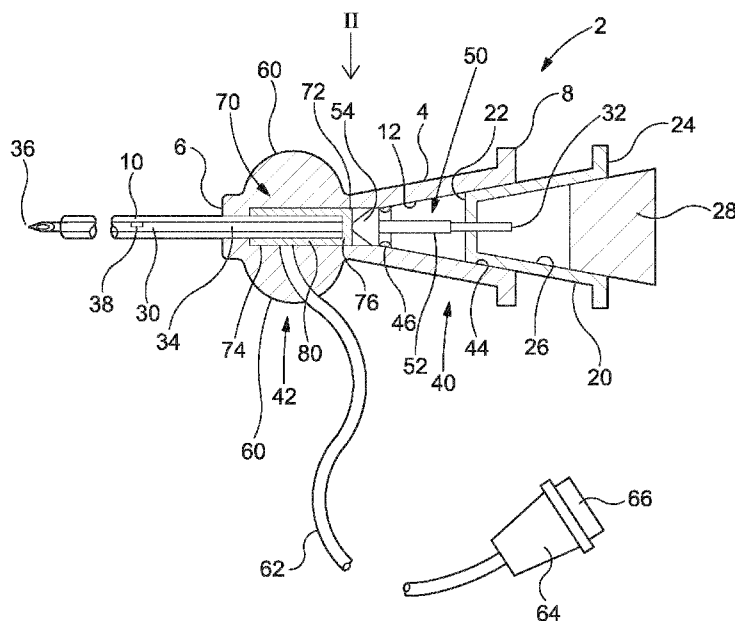


Figure 1

(57) Abstract: A catheter assembly (2) comprising a catheter hub (4); a hollow tubular catheter (10), the catheter being connected at its proximal end to the distal end of the catheter hub; a needle (30) having a needle tip (36); a hollow extension tube (62), the extension tube being connected at its distal end to the catheter hub between the proximal and distal ends thereof; a valve assembly (70) disposed within the chamber of the catheter hub, the valve assembly comprising a first valve member (72) closing the distal end of the extension tube and openable under the action of a pressurised fluid within the extension tube; and a second valve member (74) preventing the flow of fluid through the chamber to or from the proximal end of the catheter hub. A needle guard assembly (102) is also provided.