

(51) International Patent Classification:
B63B 21/34 (2006.01)(21) International Application Number:
PCT/GB2015/051087(22) International Filing Date:
9 April 2015 (09.04.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1407664.0 1 May 2014 (01.05.2014) GB
1414960.3 22 August 2014 (22.08.2014) GB(71) Applicant: **BRUPAT LIMITED** [GB/GB]; Anchor House, Ballafletcher Road, Cronkbourn, Douglas Isle of Man IM4 4QE (GB).(72) Inventor: **BRUCE, Peter**; C/o Bruce Anchor Limited, Anchor house, Cronkbourn, Douglas Isle of Man IM4 4QE (GB).(74) Agent: **MCKECHNIE, Neil**; Delta House, 50 West Nile Street, Glasgow, Central Scotland G1 2NP (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUKED BURYING DEVICES

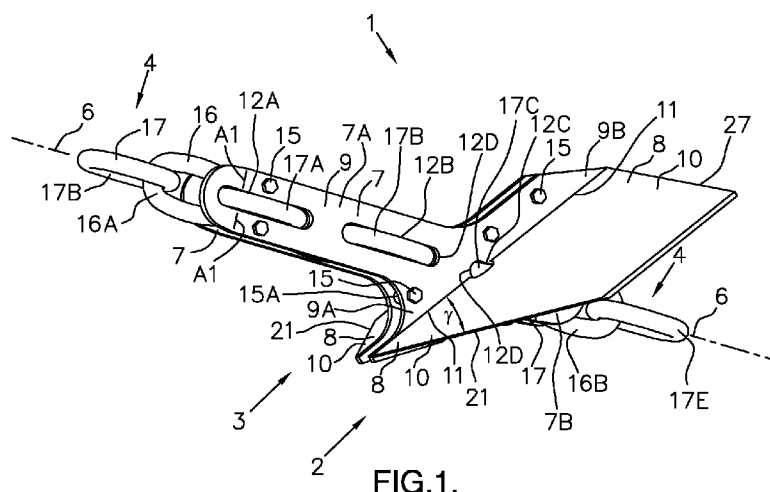

(57) **Abstract:** A fluked burying device (1, 1A), for augmenting the burying and holding capability of a drag embedment marine anchor and chain cable system while being fixedly located thereon, comprises a fluke member (8) inclinedly attached to a body member (7) including pockets (12A, 12B, 12C) for accommodating links (16, 17) of a chain cable (4) passing there-through in a defined attitude such that axial and transverse loading is impressed in the chain cable (4) via separate links (17A, 17C) to maintain bending stresses therein similar to that occurring in a 5-pocket wildcat of a chain windlass and such that emergent links (16A, 16B) have sufficient articulation in service while embedded to permit the chain cable (4) to perform the function of and eliminate need for heavy expensive shackles. The fluked burying device (1, 1A) enables soil loading from a plurality thereof to be distributed along a length of chain cable (4) and is preferably provided with a body member (7) less wide than the effective footing width of a chain cable (4) and preferably split about a plane of symmetry (5) in two halves (2, 3) for ease of transport within container gauge.