

(51) International Patent Classification:
C10G 65/10 (2006.01)(21) International Application Number:
PCT/US2011/063890(22) International Filing Date:
8 December 2011 (08.12.2011)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
61/421,834 10 December 2010 (10.12.2010) US(71) Applicant (for SM only): **SHELL OIL COMPANY**
[US/US]; One Shell Plaza, P.O. Box 2463, Houston, Texas
77252-2463 (US).(71) Applicant (for all designated States except US): **SHELL
INTERNATIONALE RESEARCH MAATSCHAPPIJ
B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 The
Hague (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MILAM, Stanley
Nemec** [US/US]; 1622 Longacre Drive, Houston, Texas
77055 (US). **REYNOLDS, Michael Anthony** [US/US];
20410 Ivory Creek Lane, Katy, Texas 77450 (US). **WEL-****LINGTON, Scott Lee** [US/US]; 5109 Aspen Street, Bel-
laire, Texas 77401 (US). **BUHRMAN, Frederik Arnold**
[NL/PH]; Block 21, Lot 8, Metrogate Subdivision, Tagapo,
Sta Rosa, Laguna (PH).(74) Agent: **TAYLOR, Richard B.**; Shell Oil Company, One
Shell Plaza, P.O. Box 2463, Houston, Texas 77252-2463
(US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: PROCESS FOR TREATING A HYDROCARBON-CONTAINING FEED

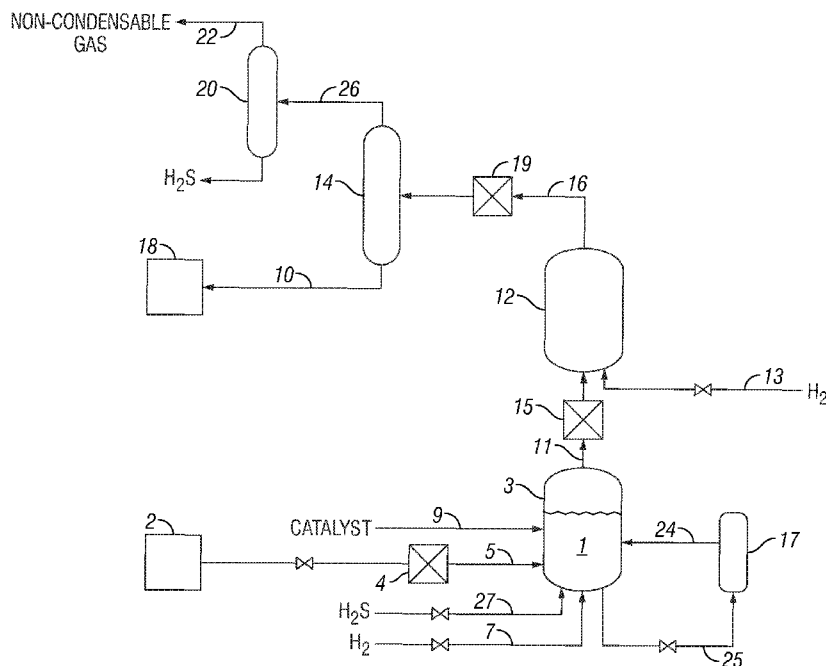

(57) Abstract: A process for treating a hydrocarbon-containing feedstock is provided in which a hydrocarbon-containing feedstock comprising at least 20 wt.% of heavy hydrocarbons is mixed with hydrogen and a metal-containing non-acidic catalyst at a temperature of 375°C to 500°C to produce a vapor comprising a first hydrocarbon-containing product. The vapor comprising the first hydrocarbon-containing product is separated from the mixture, and, apart from the mixture, the first hydrocarbon-containing product is contacted with hydrogen and a catalyst containing a Column 6 metal at a temperature of 260°C-425°C to produce a second hydrocarbon-containing product.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*