

10/03/03
2003011376

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/029554 A3

(51) International Patent Classification⁷: **G06F 9/315**,
9/38, 9/30

Boulevard, #829, Austin, TX 78729 (US). **OVERKAMP, Gregory, A.**; P.O. Box 163442, Austin, TX 78716 (US). **INOUE, Ryo**; 10521 Redmond Road, Austin, TX 78739 (US).

(21) International Application Number: PCT/US01/31408

(22) International Filing Date: 5 October 2001 (05.10.2001)

(74) Agent: **HARRIS, Scott, C.**; Fish & Richardson P.C., Suite 500, 4350 La Jolla Village, San Diego, CA 92122 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): CN, JP, KR, SG.

(30) Priority Data:
09/680,894 6 October 2000 (06.10.2000) US

Published:
— with international search report

(71) Applicants: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US). **ANALOG DEVICES, INC.** [US/US]; One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 (US).

(88) Date of publication of the international search report:
1 August 2002


(72) Inventors: **ROTH, Charles, P.**; 13305 Tichester Court, Austin, TX 78729 (US). **SINGH, Ravi, P.**; 12349 Metric

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REGISTER MOVE OPERATIONS



ACTION

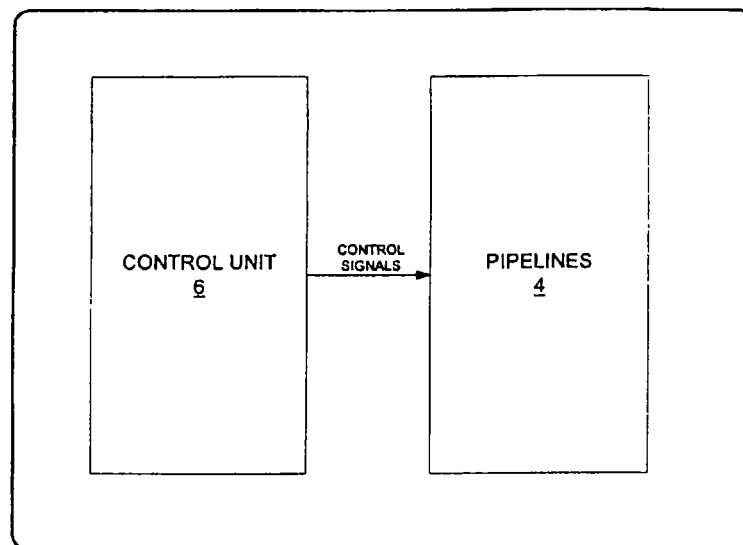

WO 02/029554 A3

(57) Abstract: In one embodiment, a programmable processor is adapted to conditionally move data between a pointer register and a data register in response to a single machine instruction. The processor has a plurality of pipelines. In response to the machine instruction, a control unit directs the pipelines to forward the data across the pipelines in order to move the data between the registers.