

200 205 2611

22/08/02

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
4 July 2002 (04.07.2002)

PCT

(10) International Publication Number
WO 02/052566 A1(51) International Patent Classification⁷: G11B 27/034,
27/11, 27/24, 20/10E., N.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
SEVENANTS, Marc; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL).

(21) International Application Number: PCT/IB01/02484

(22) International Filing Date:
11 December 2001 (11.12.2001)(74) Agent: RIEM, Charles, H.; Internationaal Octrooibureau
B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(81) Designated States (national): CN, JP, KR, SG.

(26) Publication Language: English


(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).(30) Priority Data:
00204827.0 27 December 2000 (27.12.2000) EP

Published:

- with international search report
- entirely in electronic form (except for this front page) and
available upon request from the International Bureau

(71) Applicant: KONINKLIJKE PHILIPS ELECTRON-
ICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA
Eindhoven (NL).(72) Inventors: DE KIMPE, Wim, F., M.; Prof. Holstlaan
6, NL-5656 AA Eindhoven (NL). SCHREURS, Gerard,For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR RECORDING INFORMATION

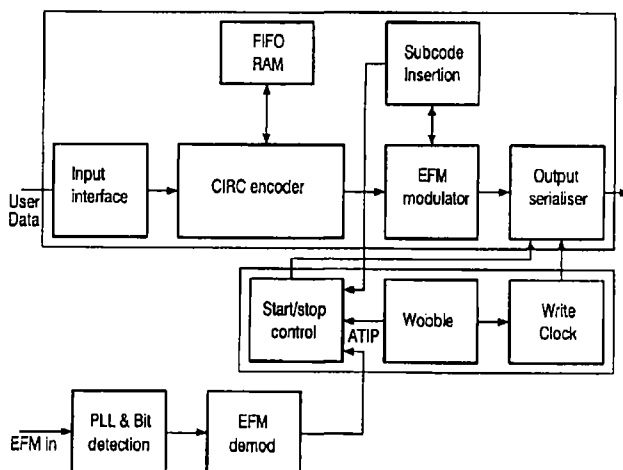

(57) Abstract: A method and device for recording information signals on a partly recorded writable record carrier (11), e.g. an optical disc. An information signal represents at least one information unit. The record carrier has a recording track which comprises preformed track position information indicative of locations for recording the information units. From the information signal a modulated signal is generated, and the recording track is scanned for recording the modulated signal. If recording is after and adjacent an existing recorded signal, a method for seamless linking of 2 parts of a recording on a CD-R/CD-RW disk is described. Recording the modulated signal is started at a location dependent on the location of an end part of said carrier recorded information signal, while locking said recording clock speed to the track wobble. Interruption of a recording can be done without loss of data or loss of storage capacity. No difference between uninterrupted and interrupted recording is guaranteed for the play-back system.

WO 02/052566 A1



162162



ACTION