

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number
WO 2004/061511 A3

(51) International Patent Classification⁷: **G02B 6/44**,
H02G 5/06

Shirley, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number:
PCT/US2003/039489

(74) Agents: **TRUSSELL, James, J.** et al.; Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(22) International Filing Date:
11 December 2003 (11.12.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/331,969 30 December 2002 (30.12.2002) US


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: **BERGLUND, Sidney, J.**; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). **PARIKH, Rutesh, D.**; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). **BALL,**

[Continued on next page]

(54) Title: UNITARY SPLICE AND DROP WIRE CLOSURE

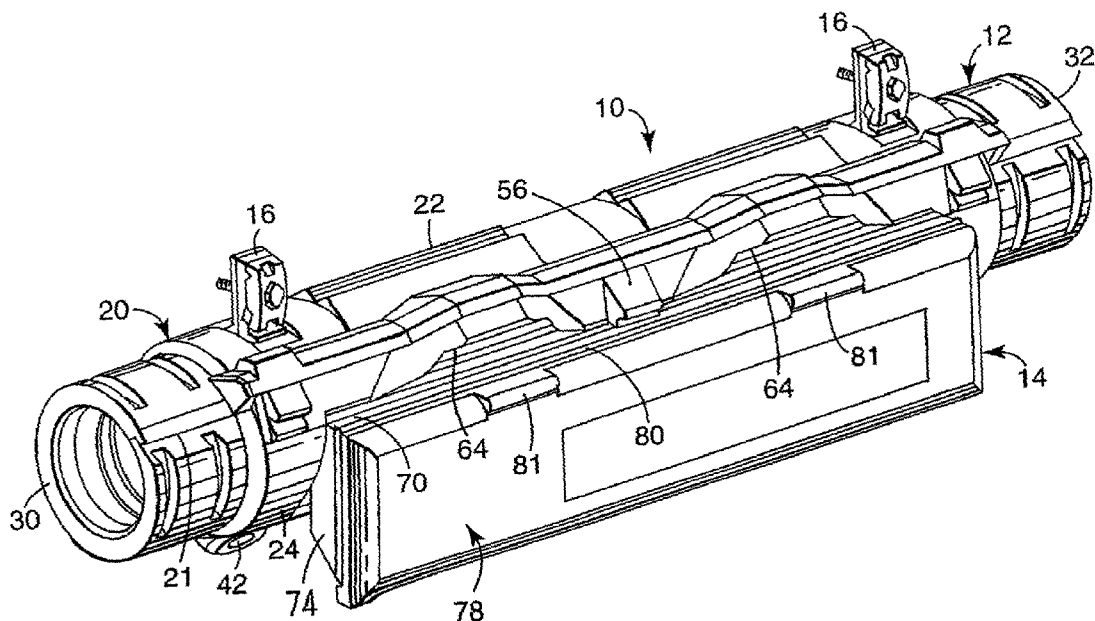

(57) Abstract: A terminal for use with telecommunication cables has a splice closure and a terminal closure joined to the splice closure. The splice closure encloses opened areas of the cable, while the terminal closure encloses a connection device for establishing connection between telecommunication lines in the splice closure and a drop line. In various embodiments, a frame is mounted within the splice closure for retaining non-spliced lines of the telecommunication cable away from spliced lines; a storage member is located within the terminal closure for retaining excess lengths of the drop line; a drop line strain relief bracket is mounted within the terminal closure; and a memory device is incorporated into the terminal for storing information about the terminal.

WO 2004/061511 A3



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

(88) Date of publication of the international search report:

12 May 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.