



(51) International Patent Classification:
G02C 1/04 (2006.01) **A61F 9/02** (2006.01)

(21) International Application Number:
PCT/US2011/047676

(22) International Filing Date:
12 August 2011 (12.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/373,698 13 August 2010 (13.08.2010) US

(71) Applicant (for all designated States except US): **OAK-
LEY, INC.** [US/US]; One Icon, Foothill Ranch, CA
92610 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **REYES, Carlos**
[US/US]; 7 Via Silla, Rancho Santa Margarita, CA 92688
(US). **CALILUNG, Ryan** [US/US]; 4122 Archway,
Irvine, CA 92618 (US). **JANAVICIUS, Jason, Paul**
[US/US]; 24041 Jacana Circle, Laguna Niguel, CA 92677
(US). **MORITZ, Hans** [US/US]; 29 Bonita Vista,
Foothill Ranch, CA 92610 (US).

(74) Agent: **ALTMAN, Daniel, E.**; **KNOBBE, MARTENS,
OLSON & BEAR, LLP**, 2040 Main Street, 14th Floor,
Irvine, CA 92614 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EYEWEAR WITH LENS RETENTION MECHANISM

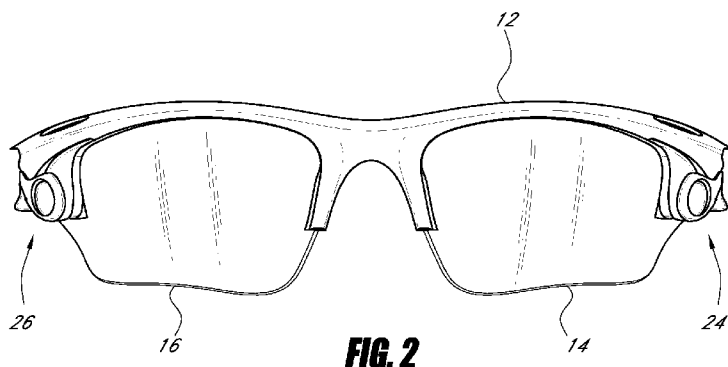

(57) Abstract: Eyewear is provided that can comprise a frame, a lens, and at least one lens retention mechanism that can secure the lens relative to the frame. The frame can support at least one lens in a field of view of a wearer. The frame can include a first ear stem and a second ear stem that allows the frame to be worn on the wearer's head. The retention mechanism can be supported by the frame and/or the lens and can be movable or fixed relative to the frame and/or the lens. In some embodiments, the retention mechanism comprises a latch device having an engagement structure that moves along a path of motion that intersects the lens. The retention component can engage an engagement portion of the lens to securing the lens relative to the frame.

