



(43) International Publication Date
26 June 2014 (26.06.2014)

- (51) International Patent Classification:
A47K 10/42 (2006.01) B65D 83/08 (2006.01)
- (21) International Application Number:
PCT/IB2013/060876
- (22) International Filing Date:
12 December 2013 (12.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/721,572 20 December 2012 (20.12.2012) US
- (71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC.
[US/US]; Neenah, Wisconsin 54956 (US).
- (72) Inventor: BECHYNE, Christopher, M.; W6150 Wild
Cherry Court, Menasha, Wisconsin 54952 (US).
- (74) Agents: KUBICKI, H., Michael et al.; 2300 Winchester
Road, Neenah, Wisconsin 54956 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: STORING AND DISPENSING CONTAINER FOR WIPES

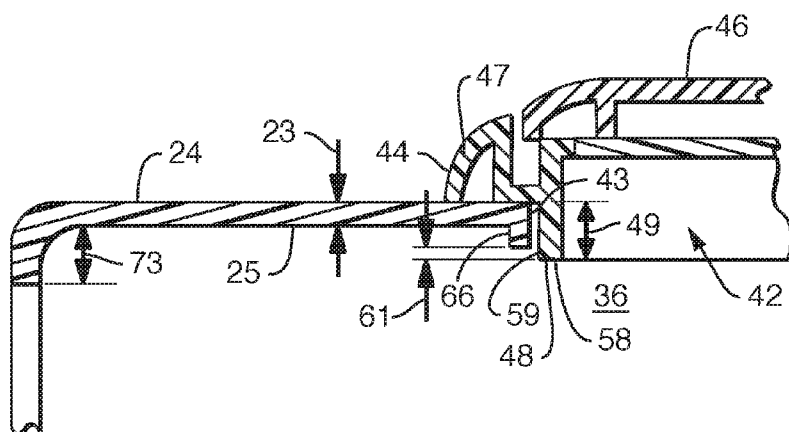


FIG. 10

(57) Abstract: A container for wipes includes a dispenser housing. The housing defines top and bottom walls, first and second side walls, and first and second end walls. The walls collectively define an interior space. The top wall includes a dispensing orifice which is covered by a lid assembly. The lid assembly includes a ring and a flip top. The ring is permanently affixed to the top wall, and the flip top is hinged to the ring. The ring has an upper portion and a buffering flange. The upper portion generally extends along the dispensing orifice perimeter. In one embodiment, the buffering flange protrudes from the upper portion into the interior space, and a height of the buffering flange is greater than a thickness of the top wall. In another embodiment, the buffering flange protrudes from the upper portion into the interior space past the inner surface of the top wall.