

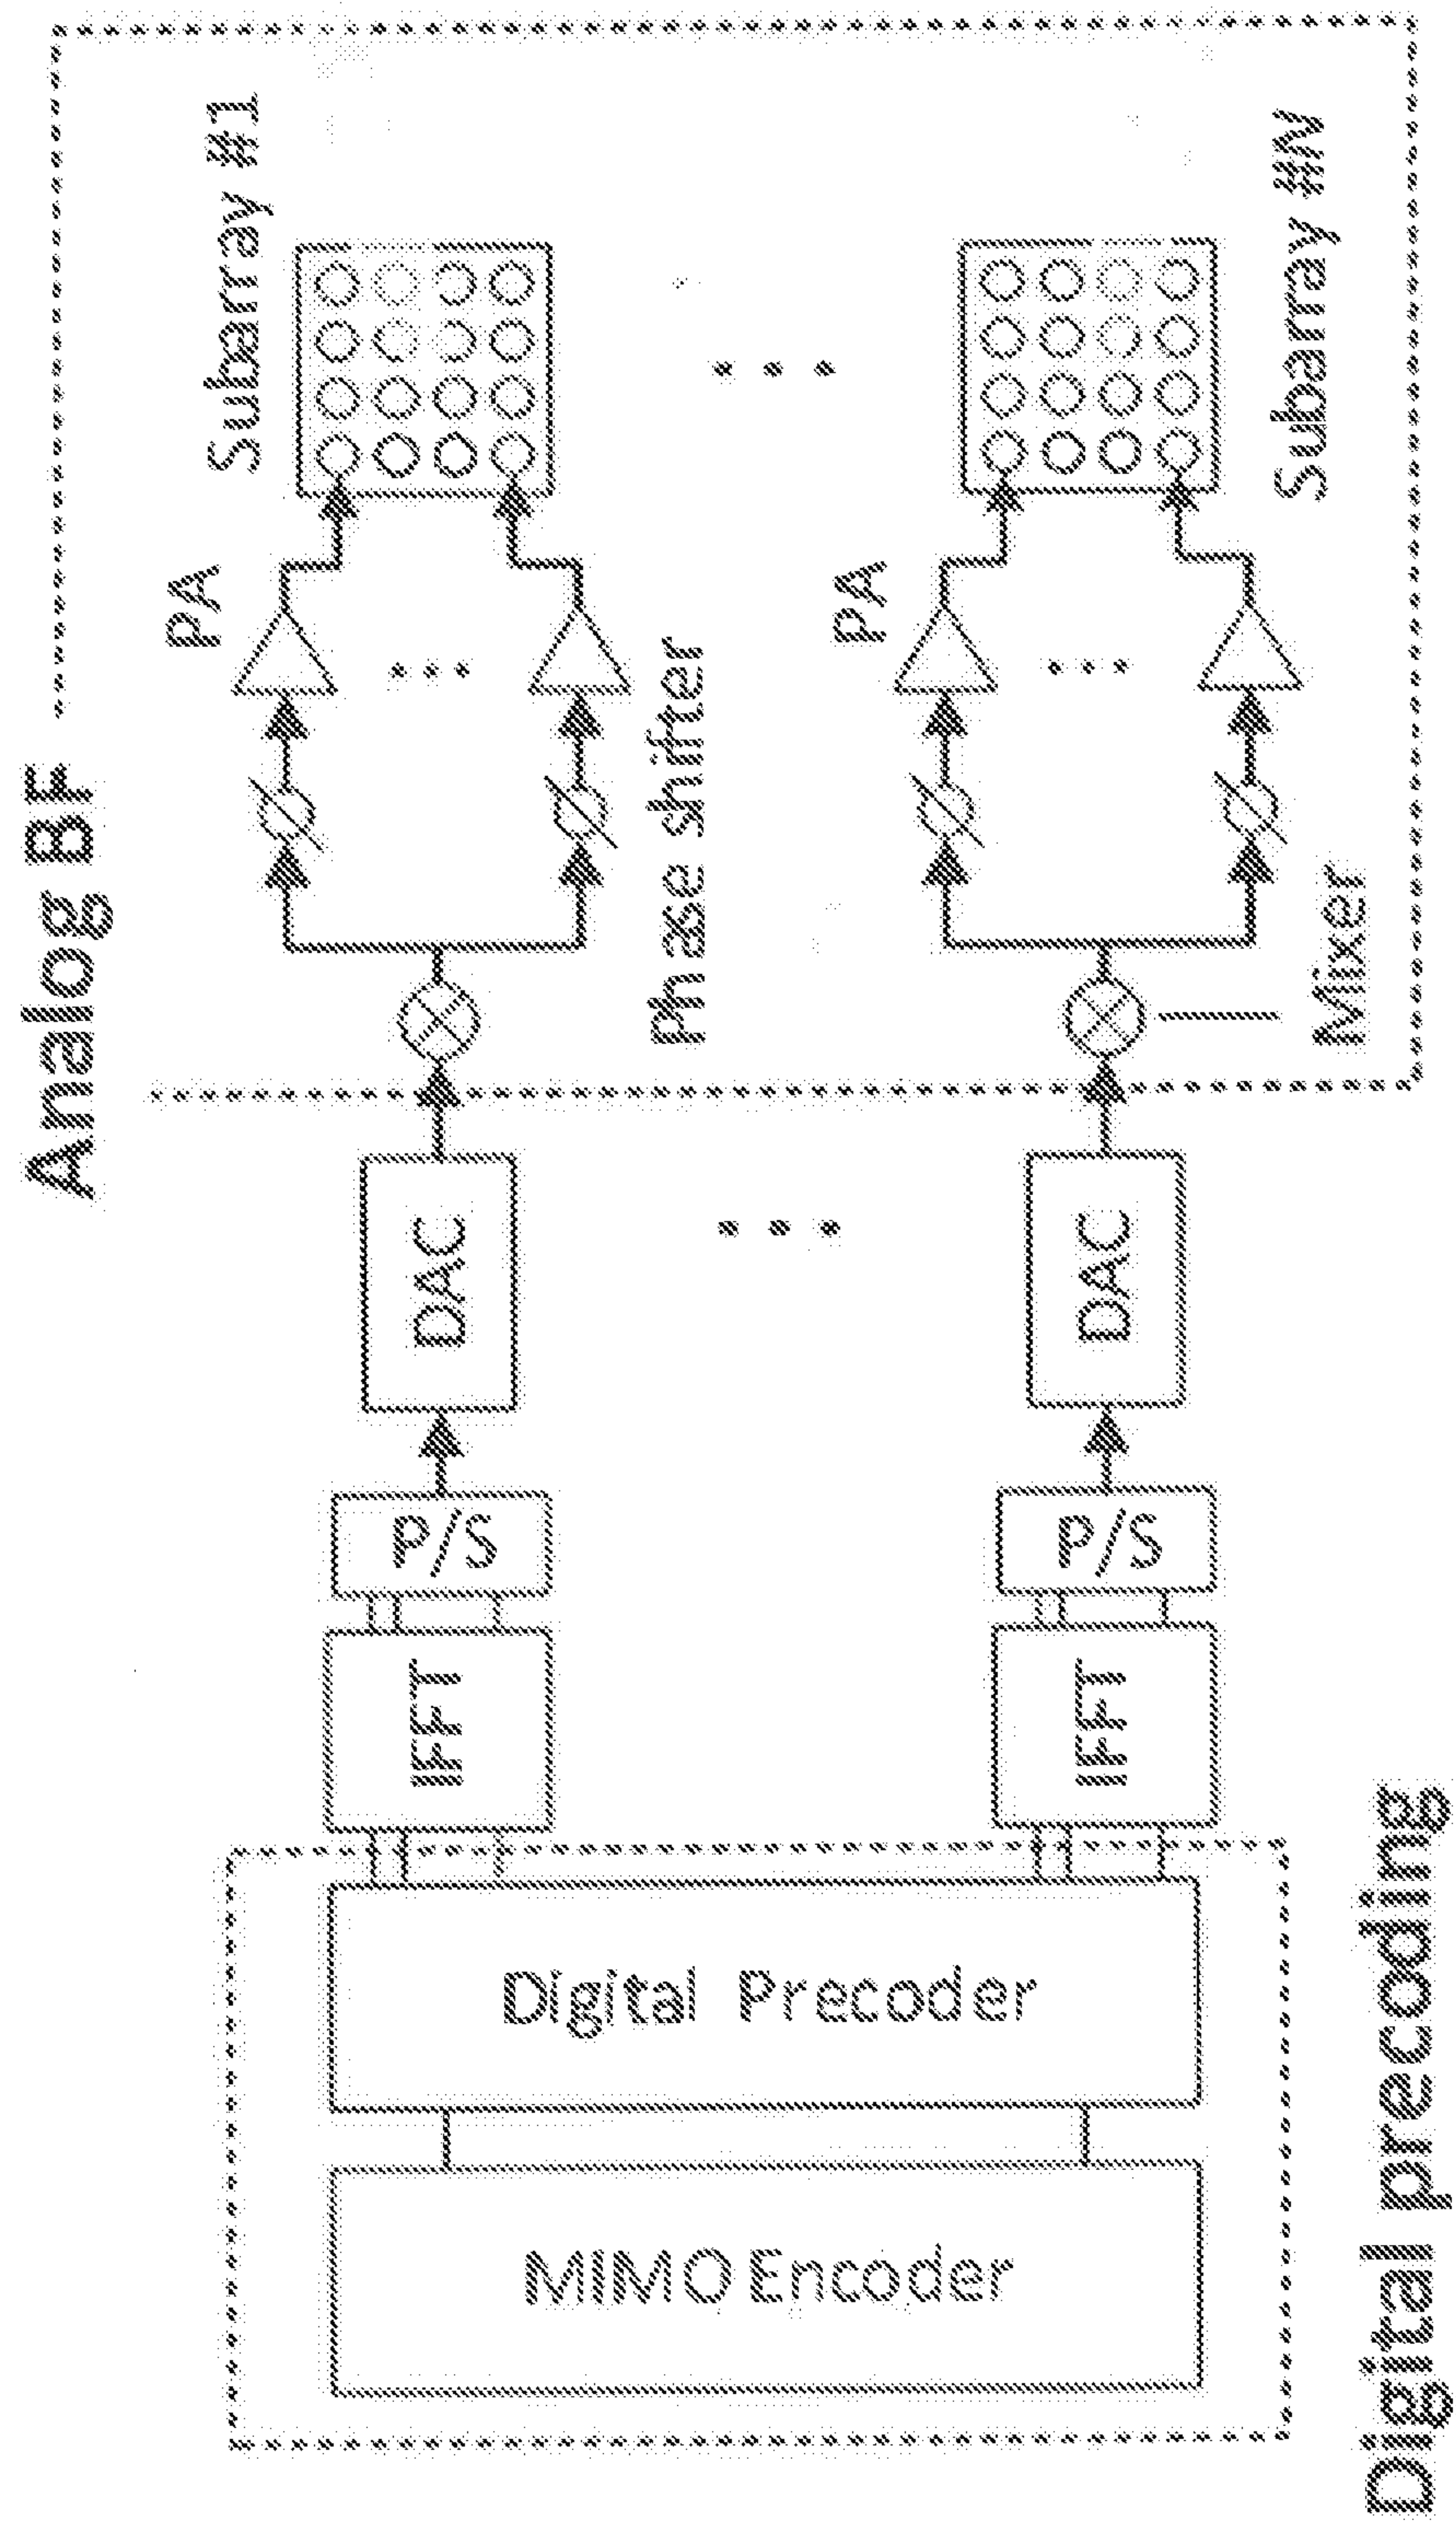


FIG. 1

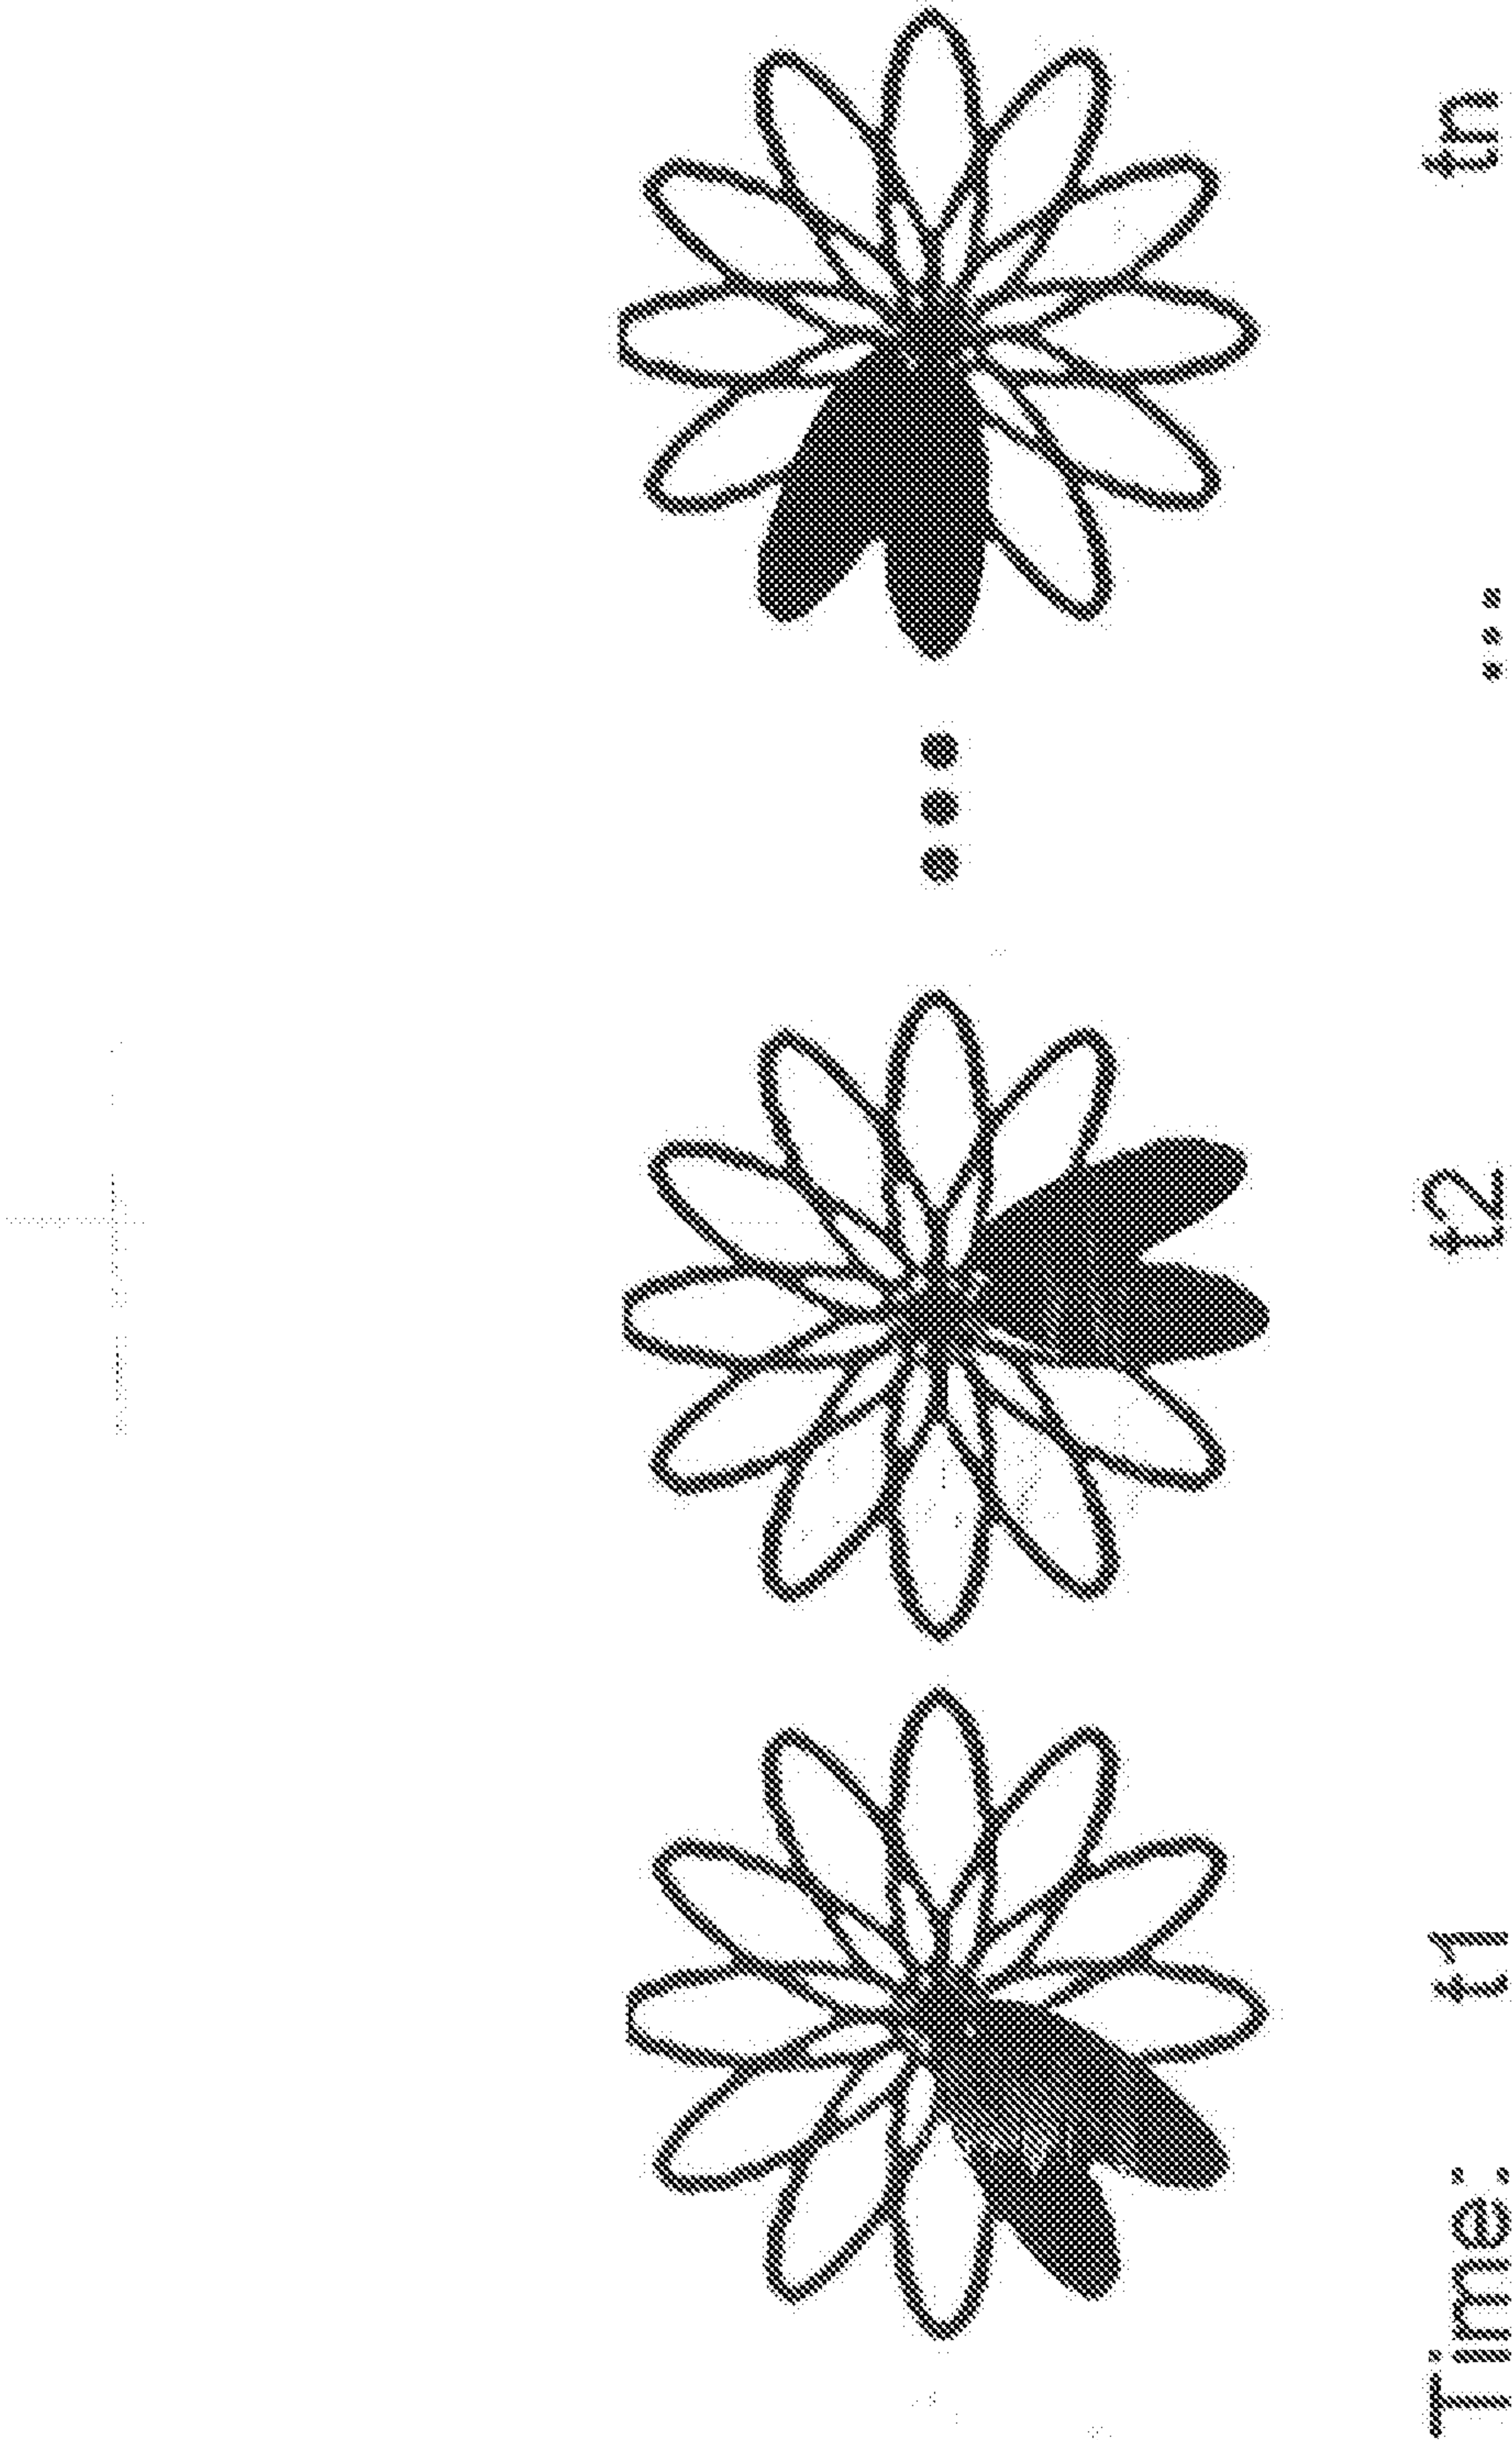


FIG. 2

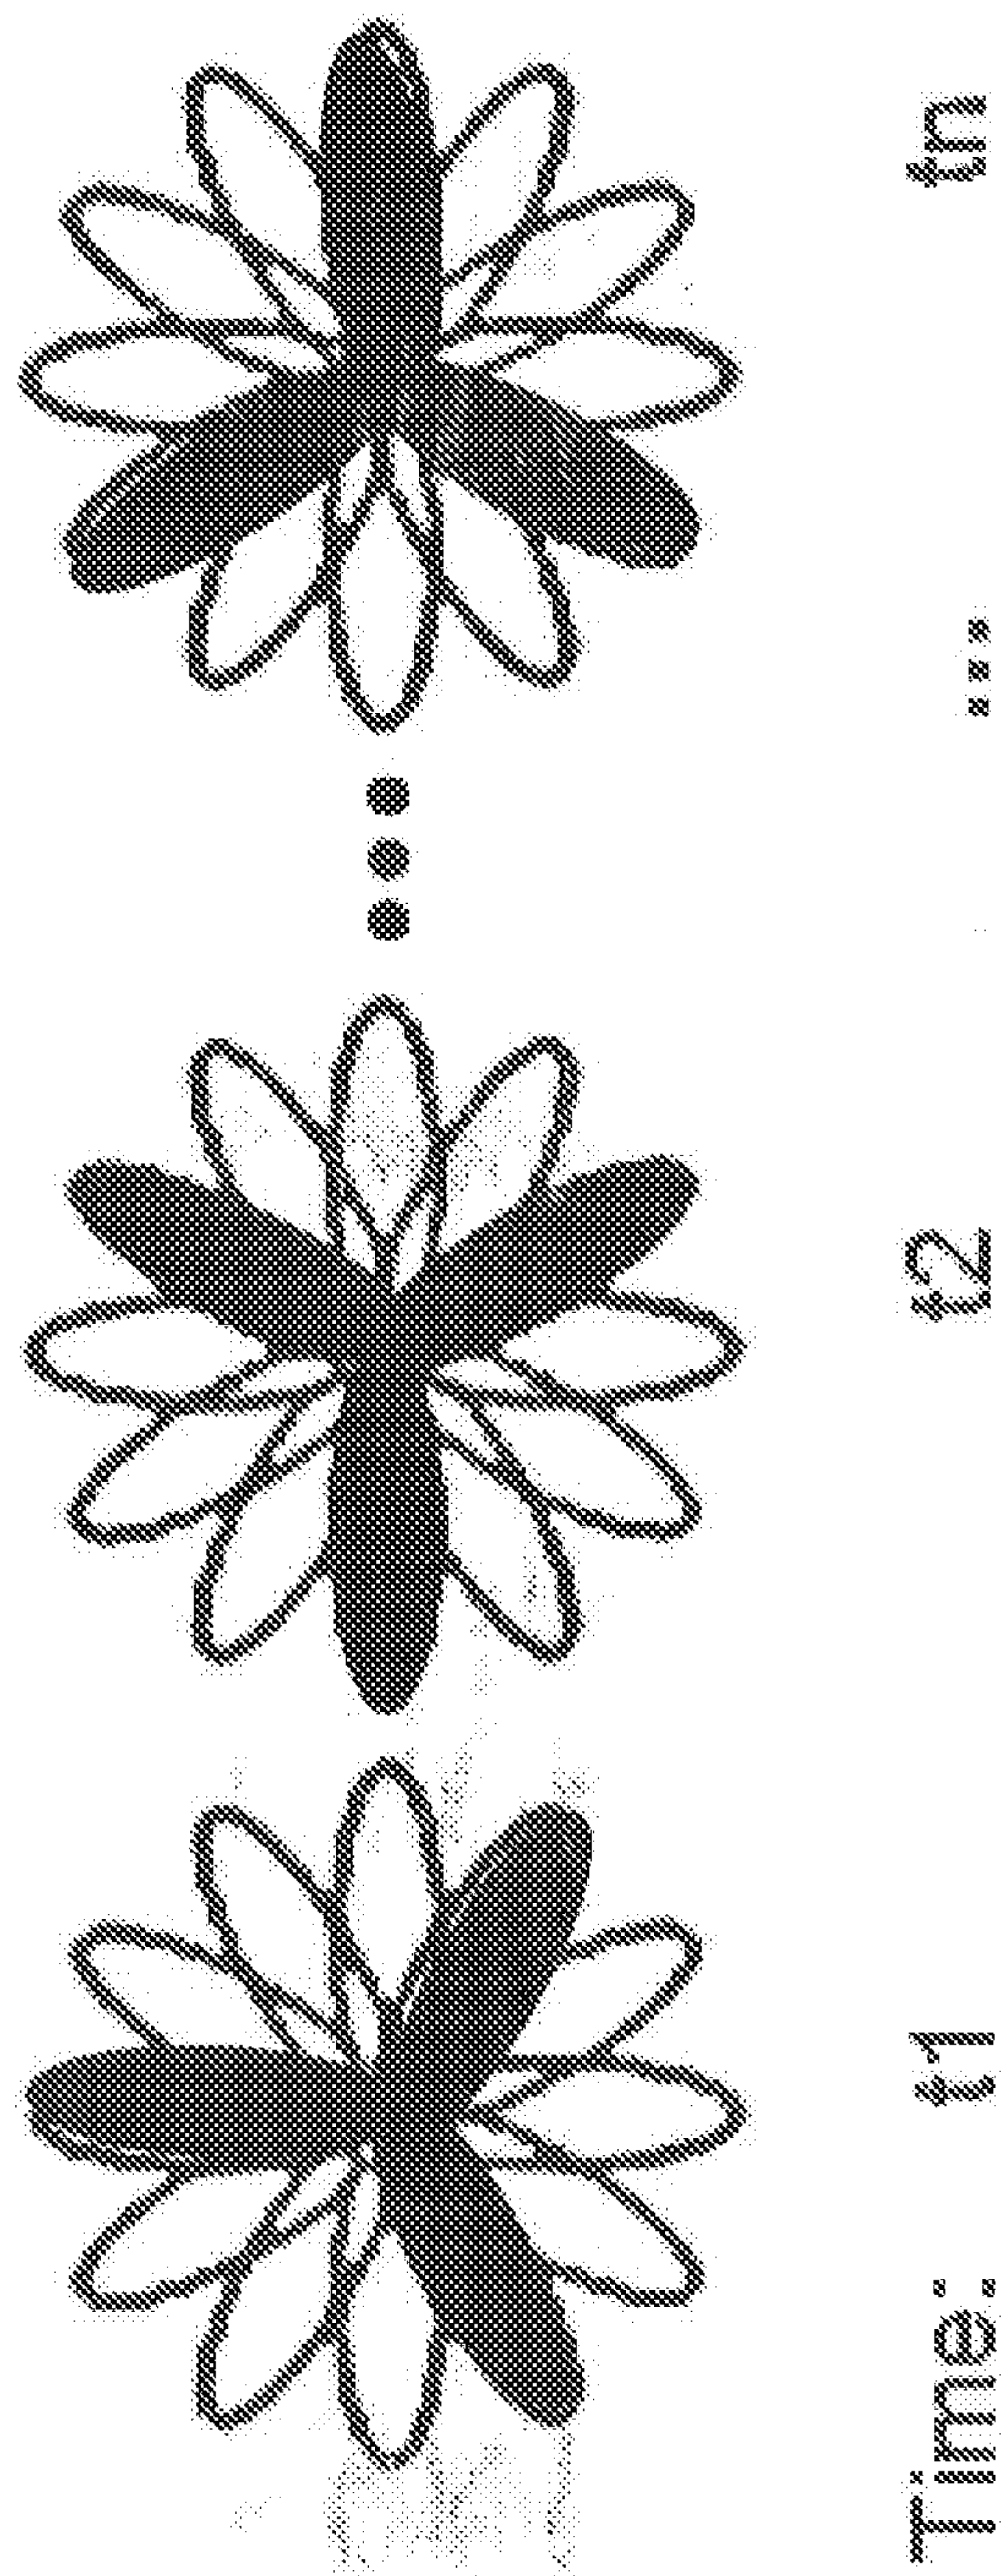


FIG. 3

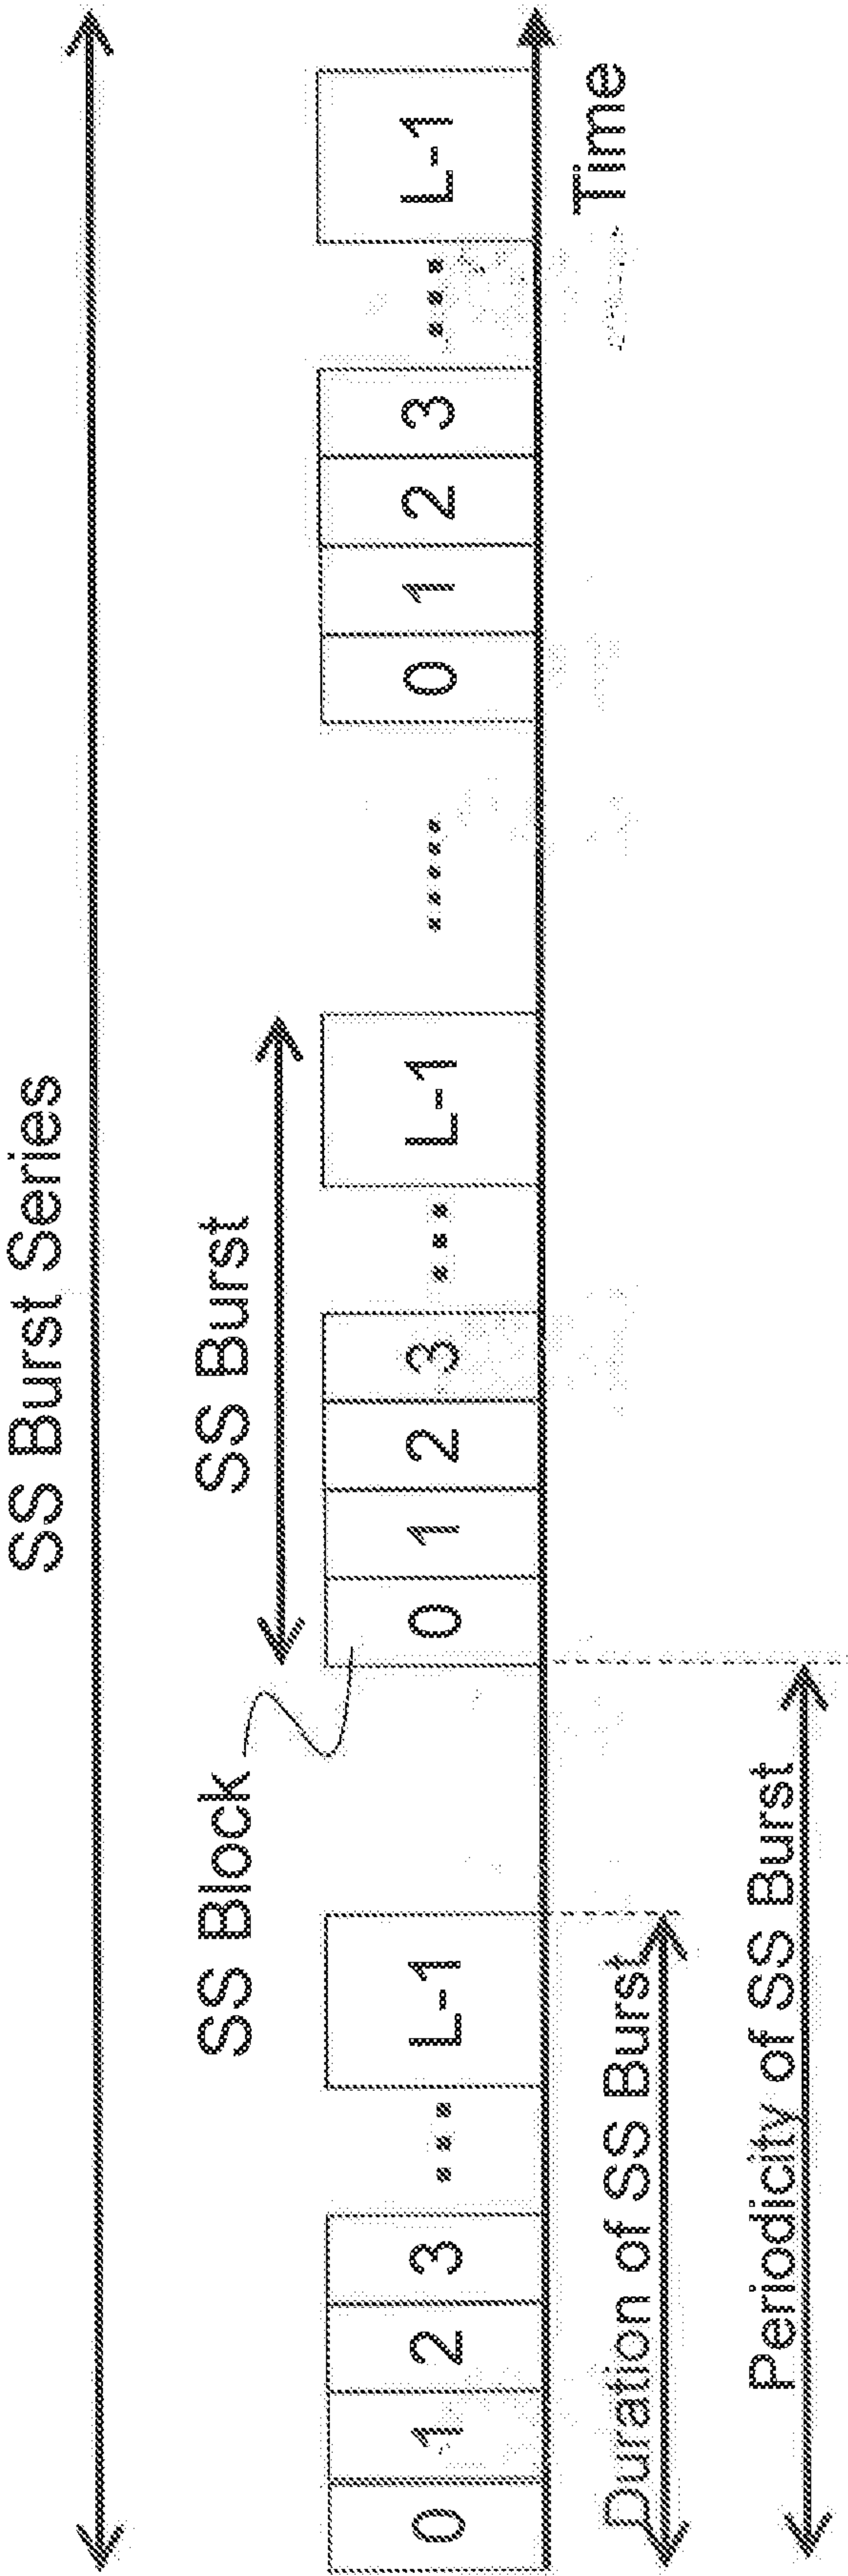


FIG. 4

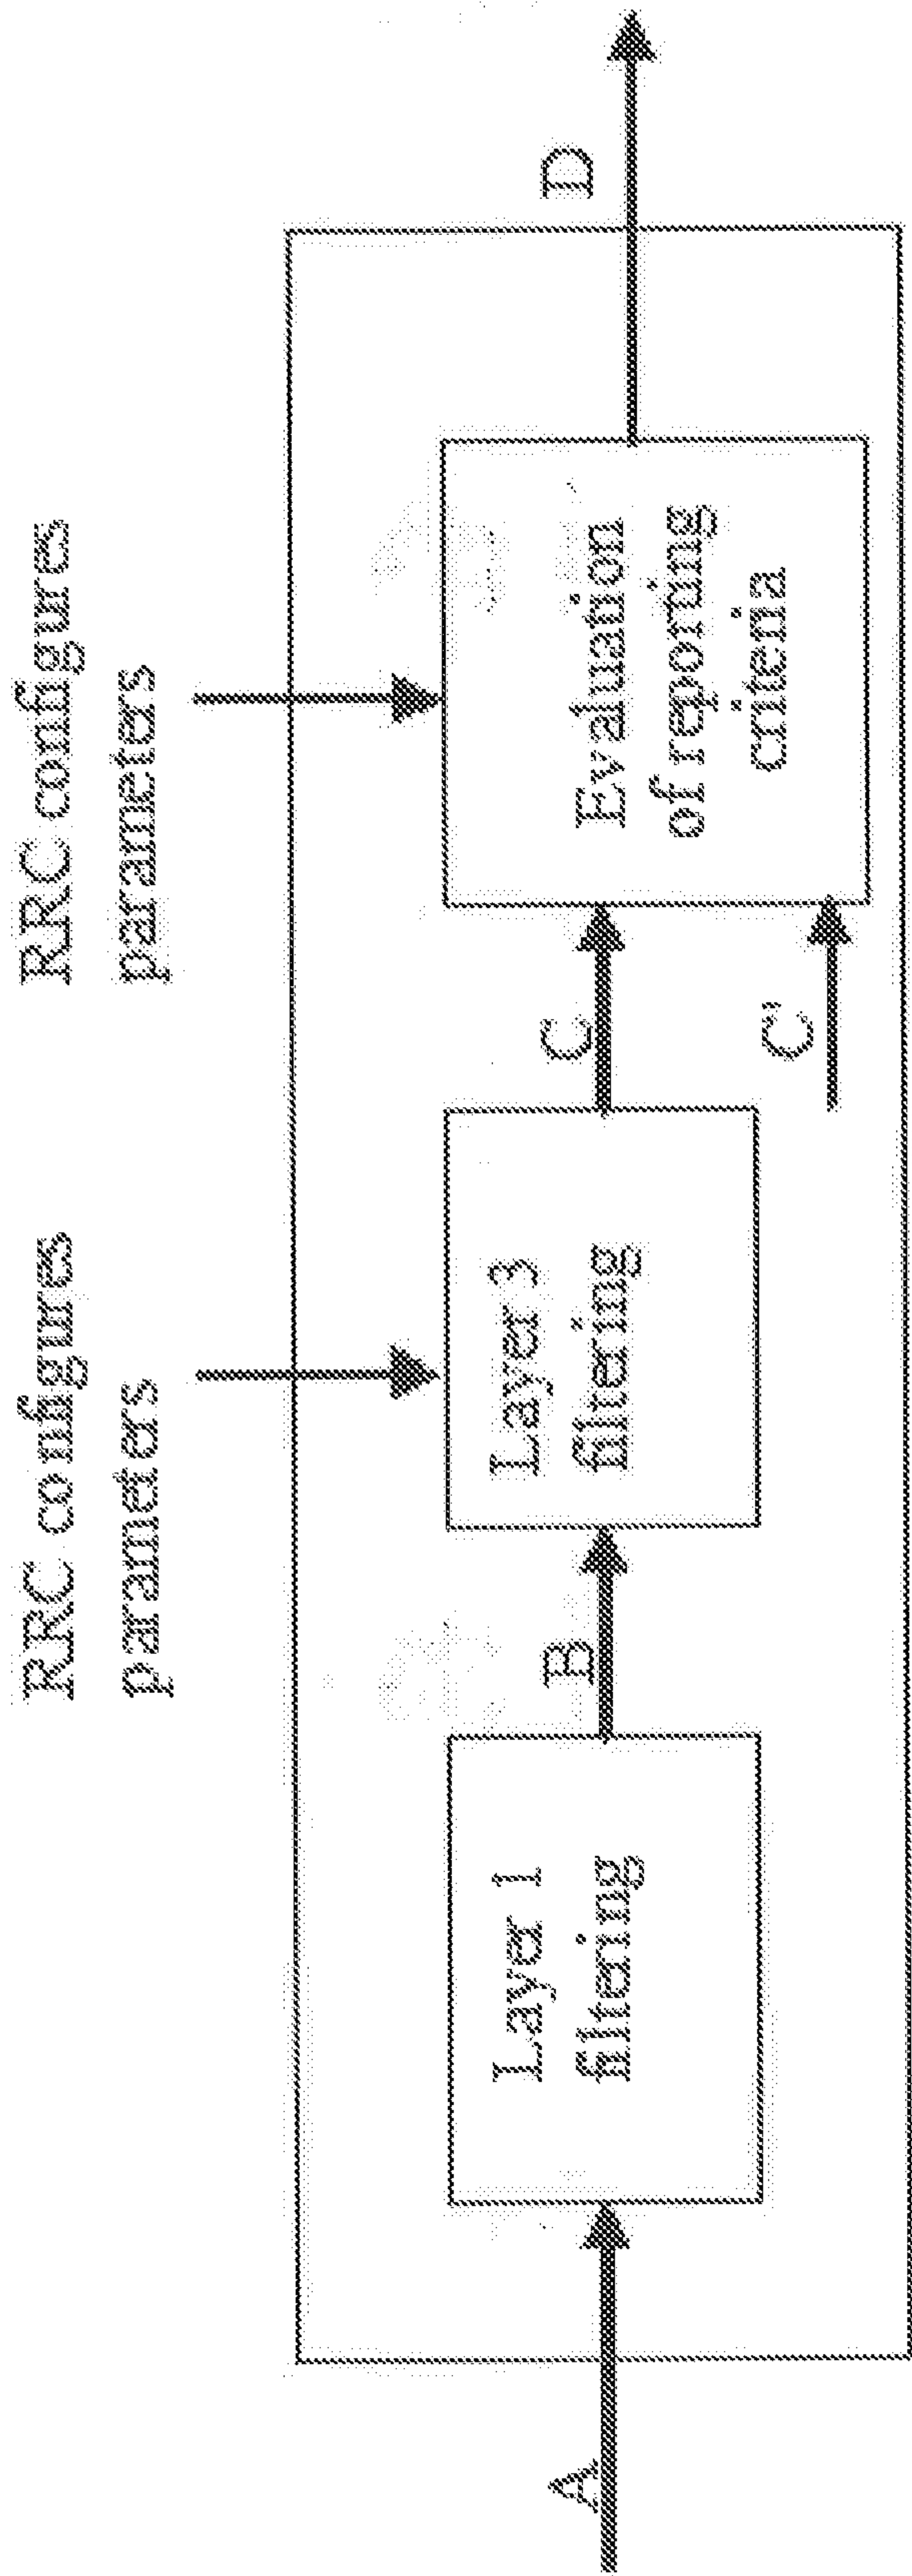


FIG. 5

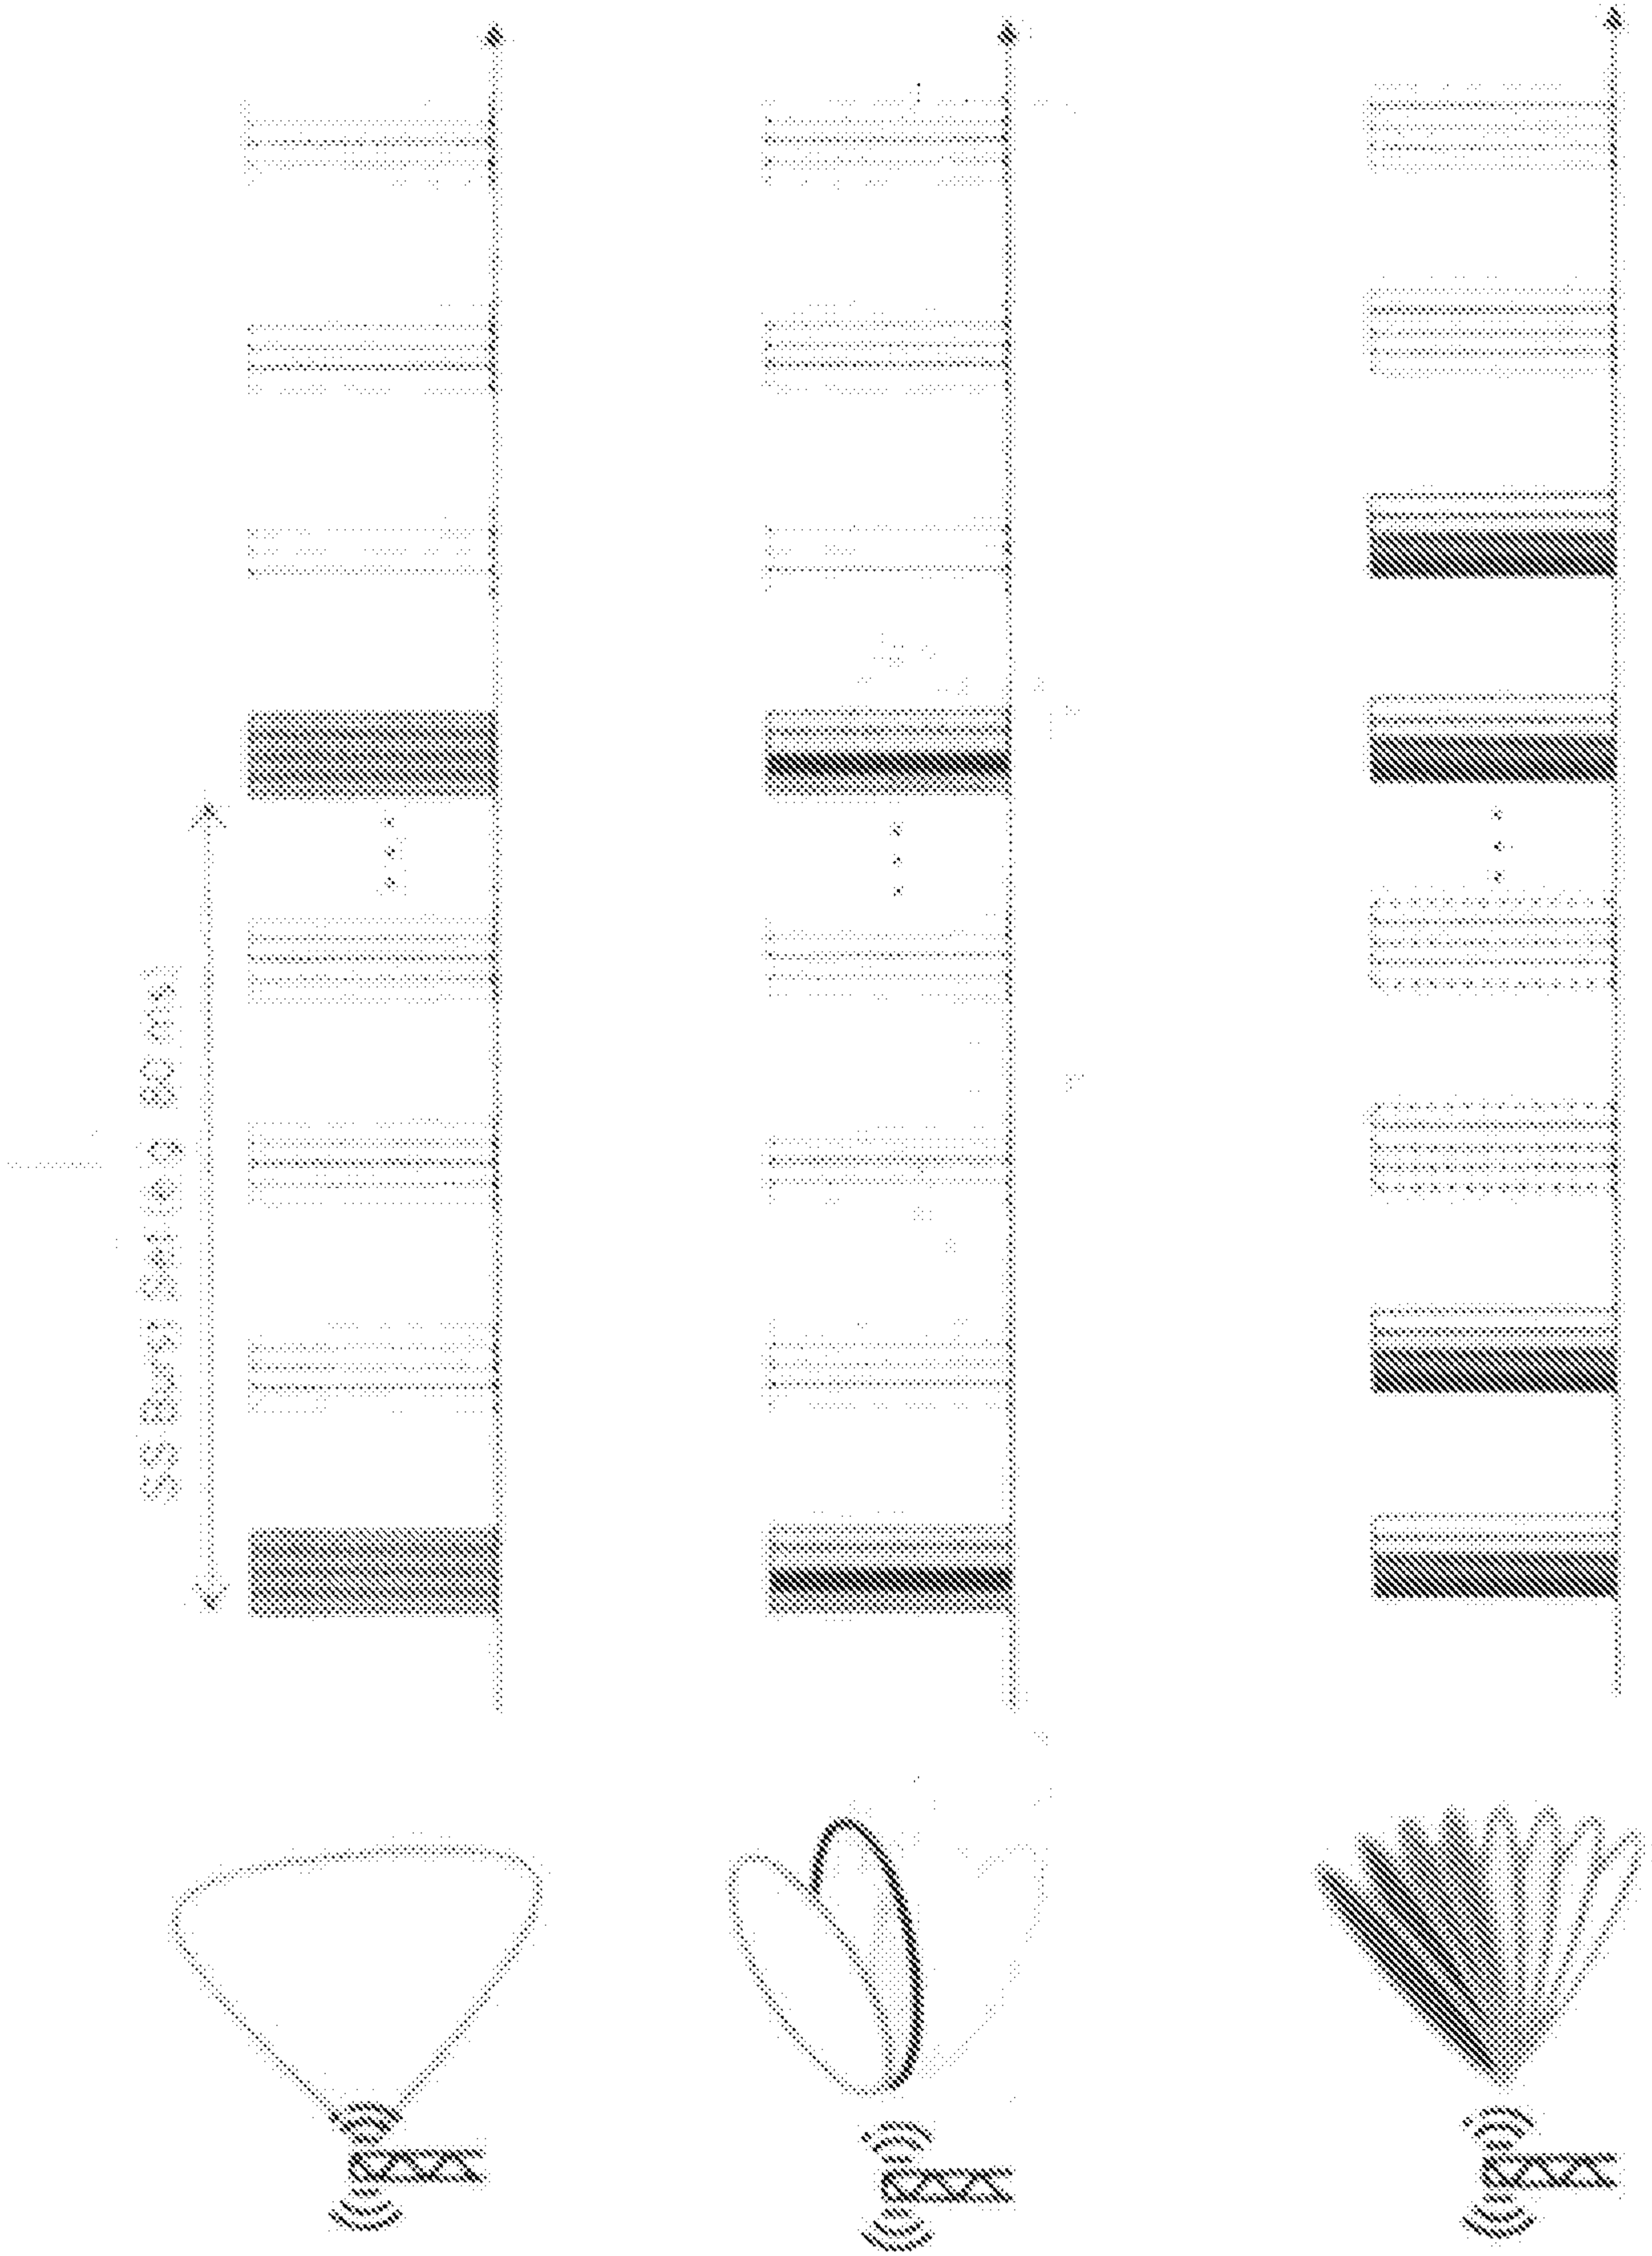


FIG. 6

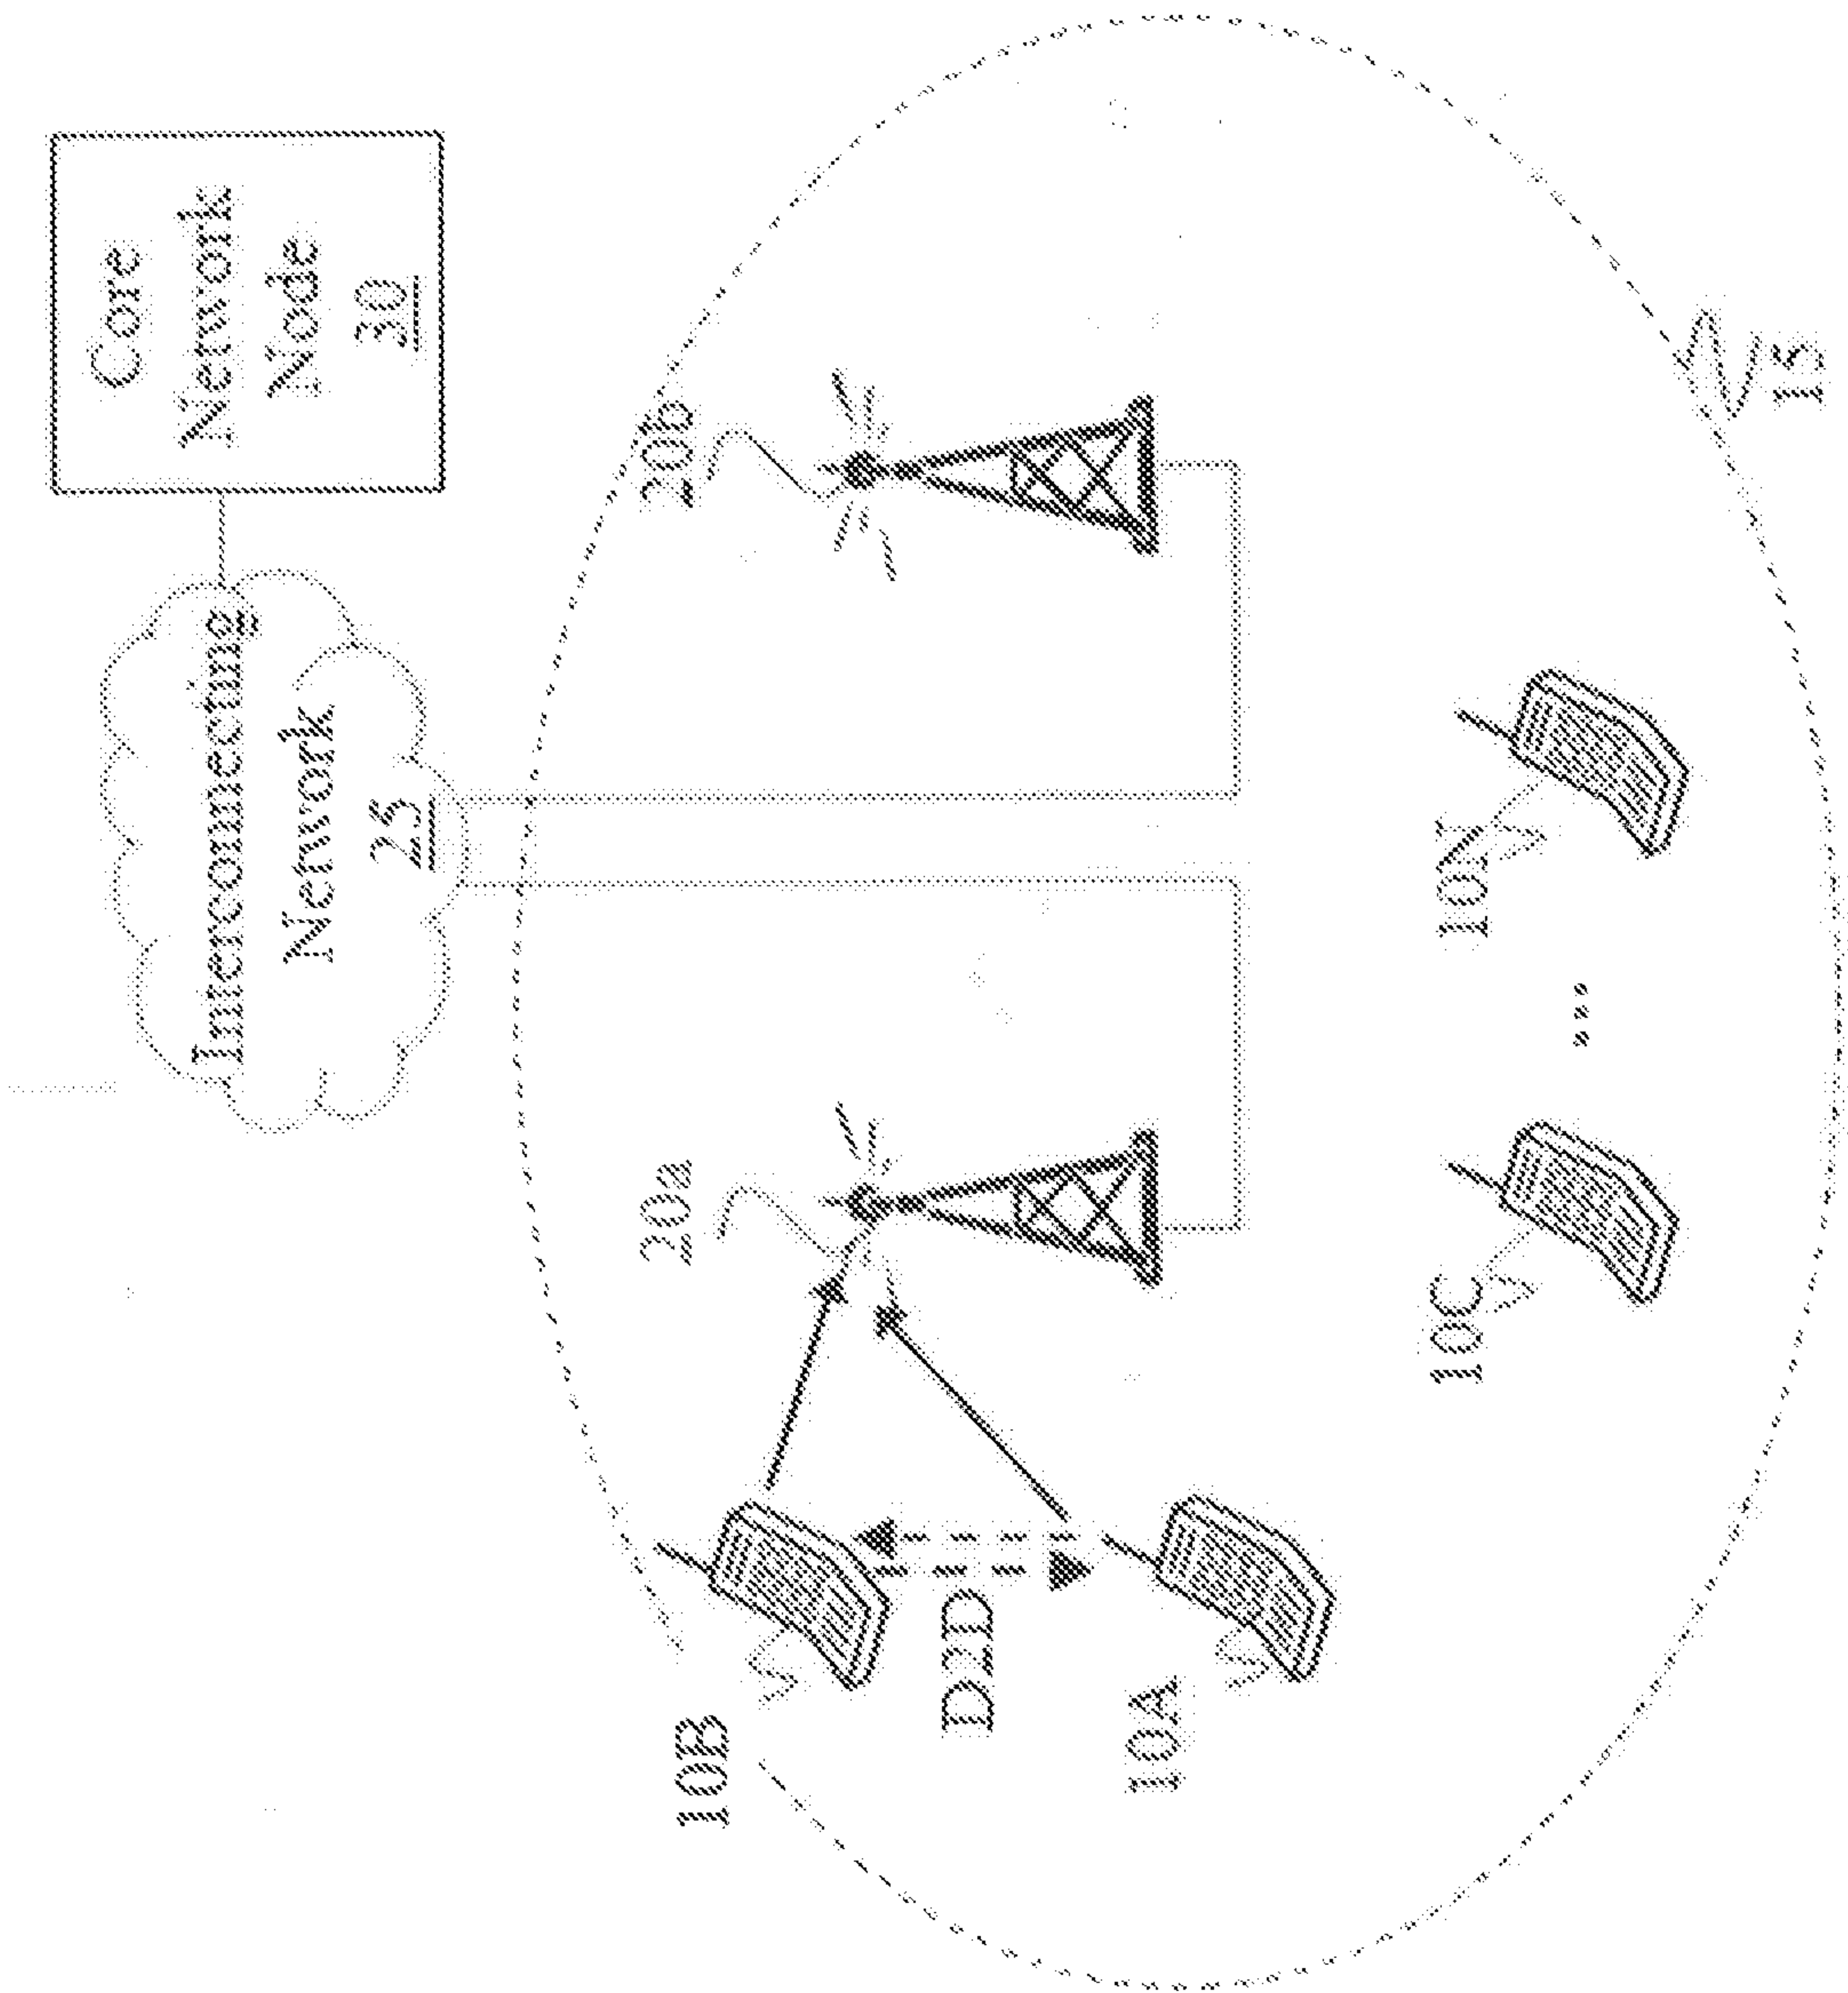


FIG. 7

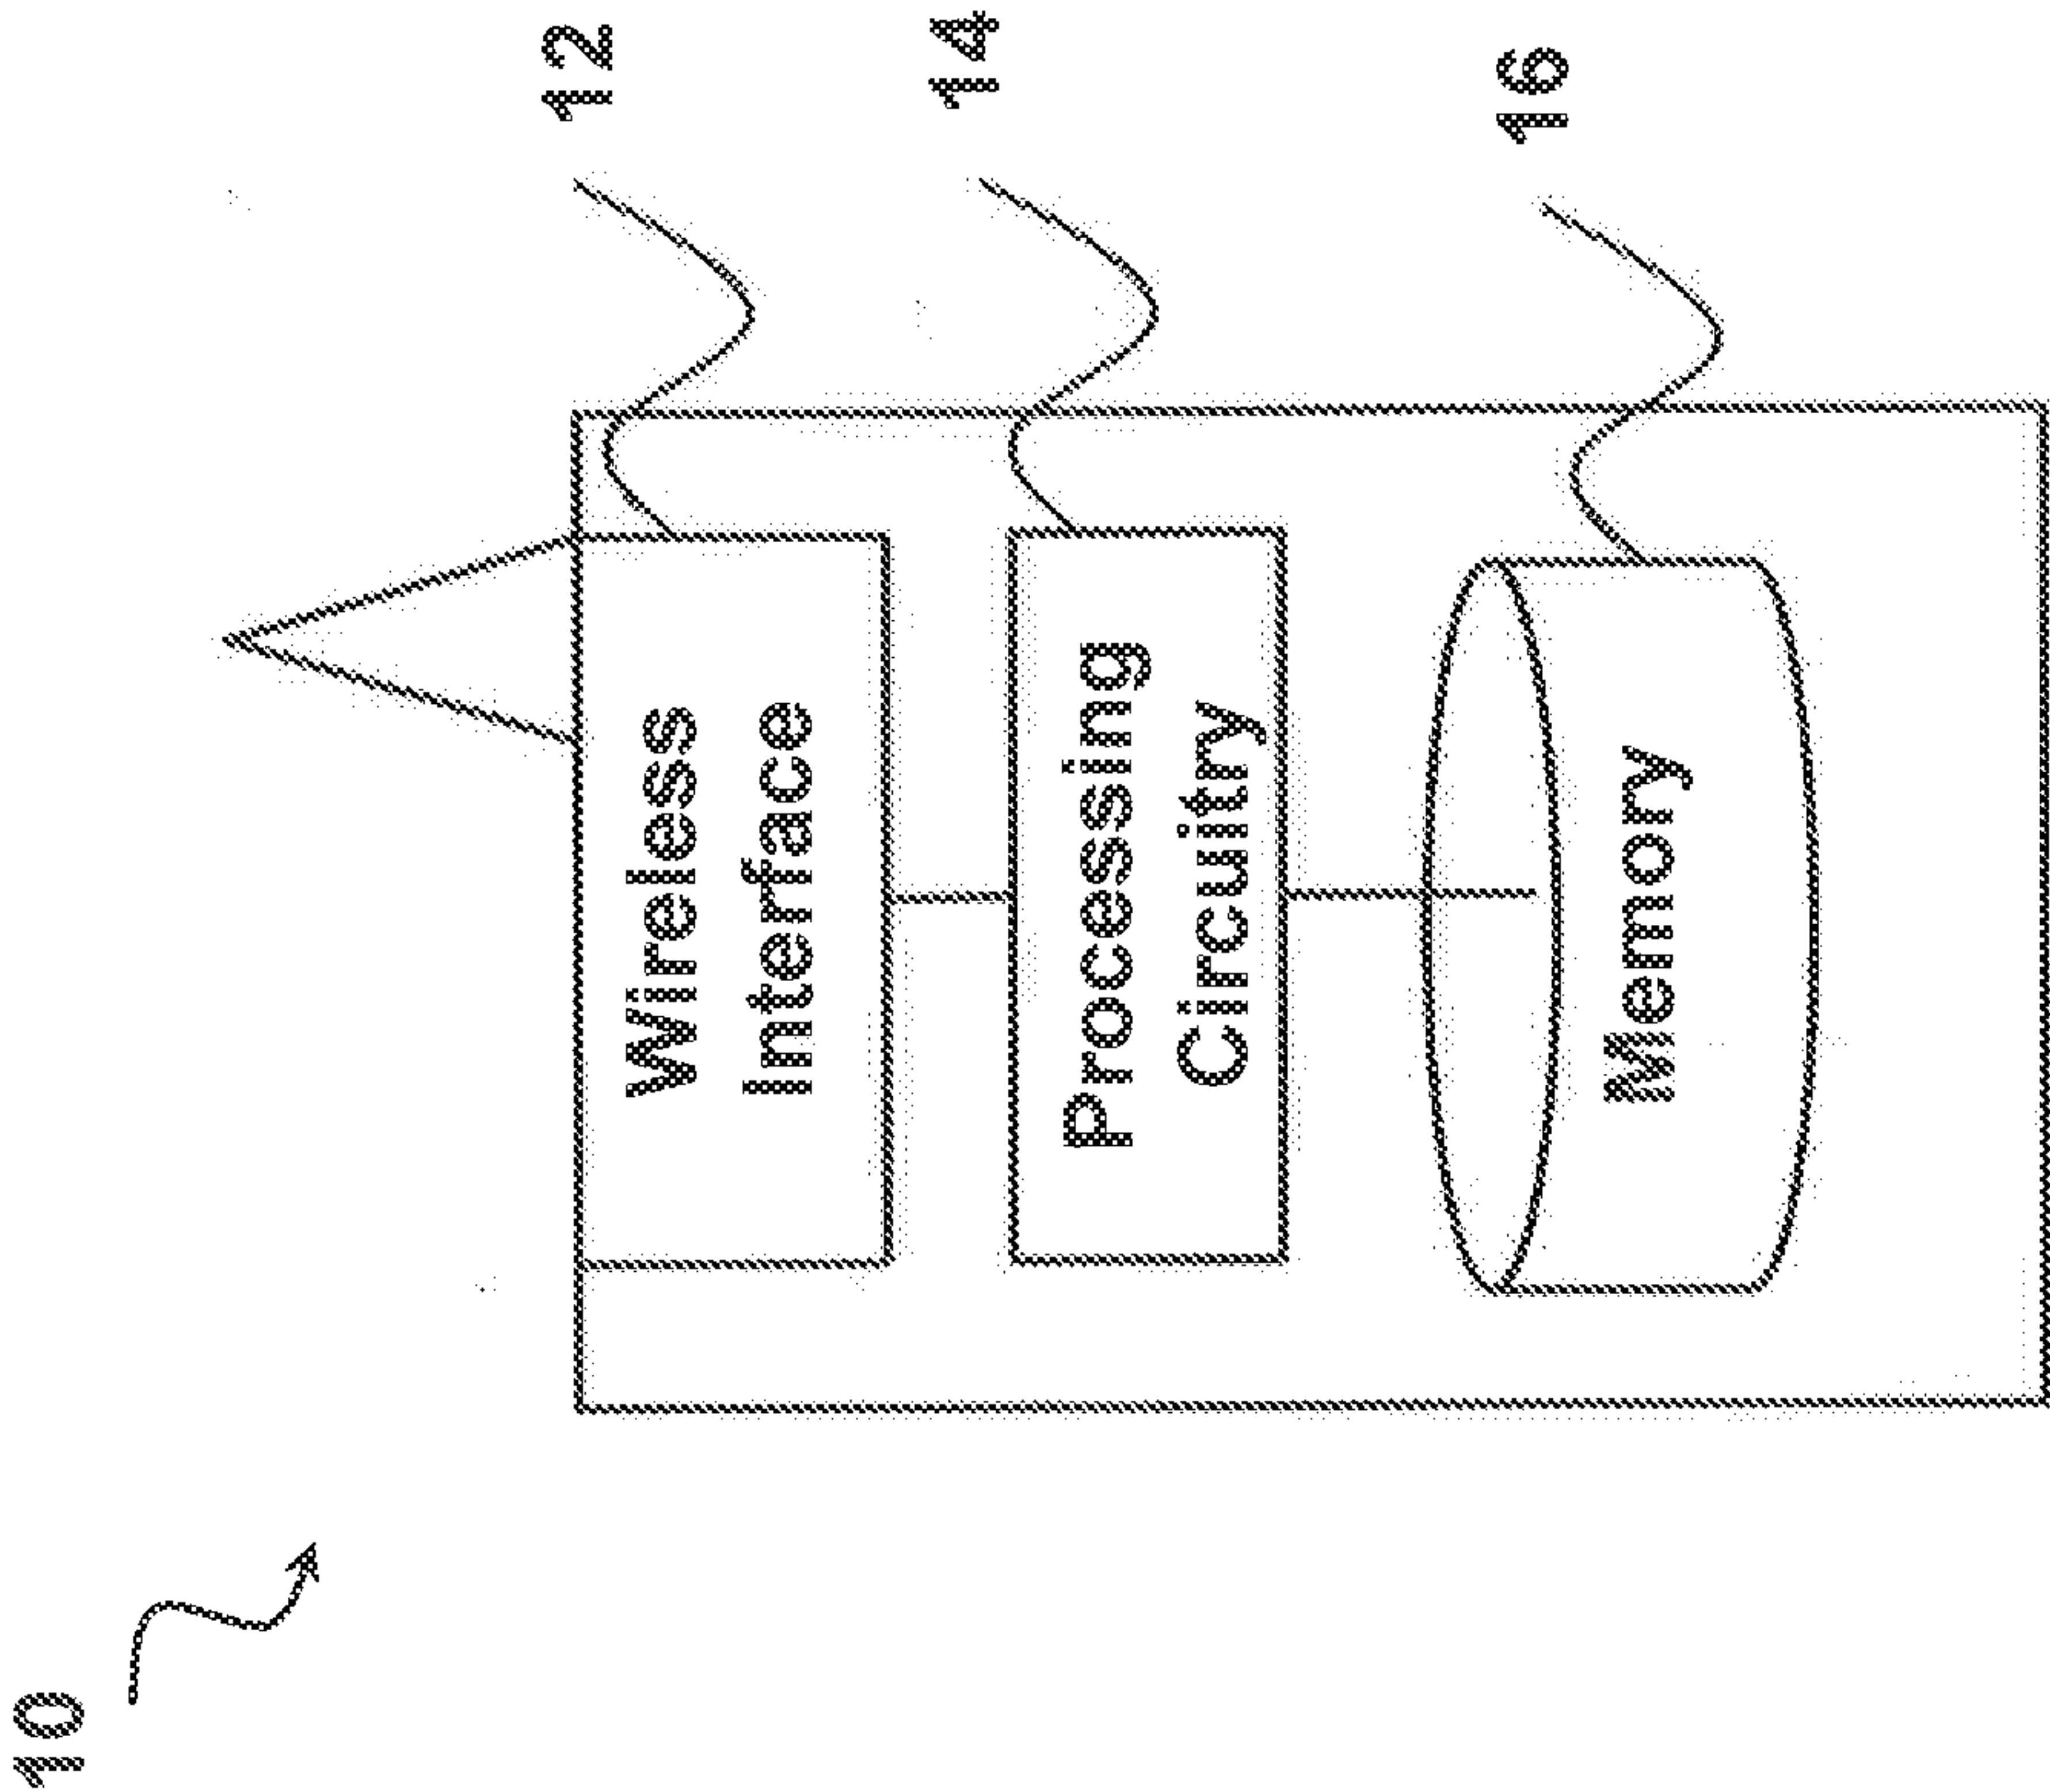


FIG. 8

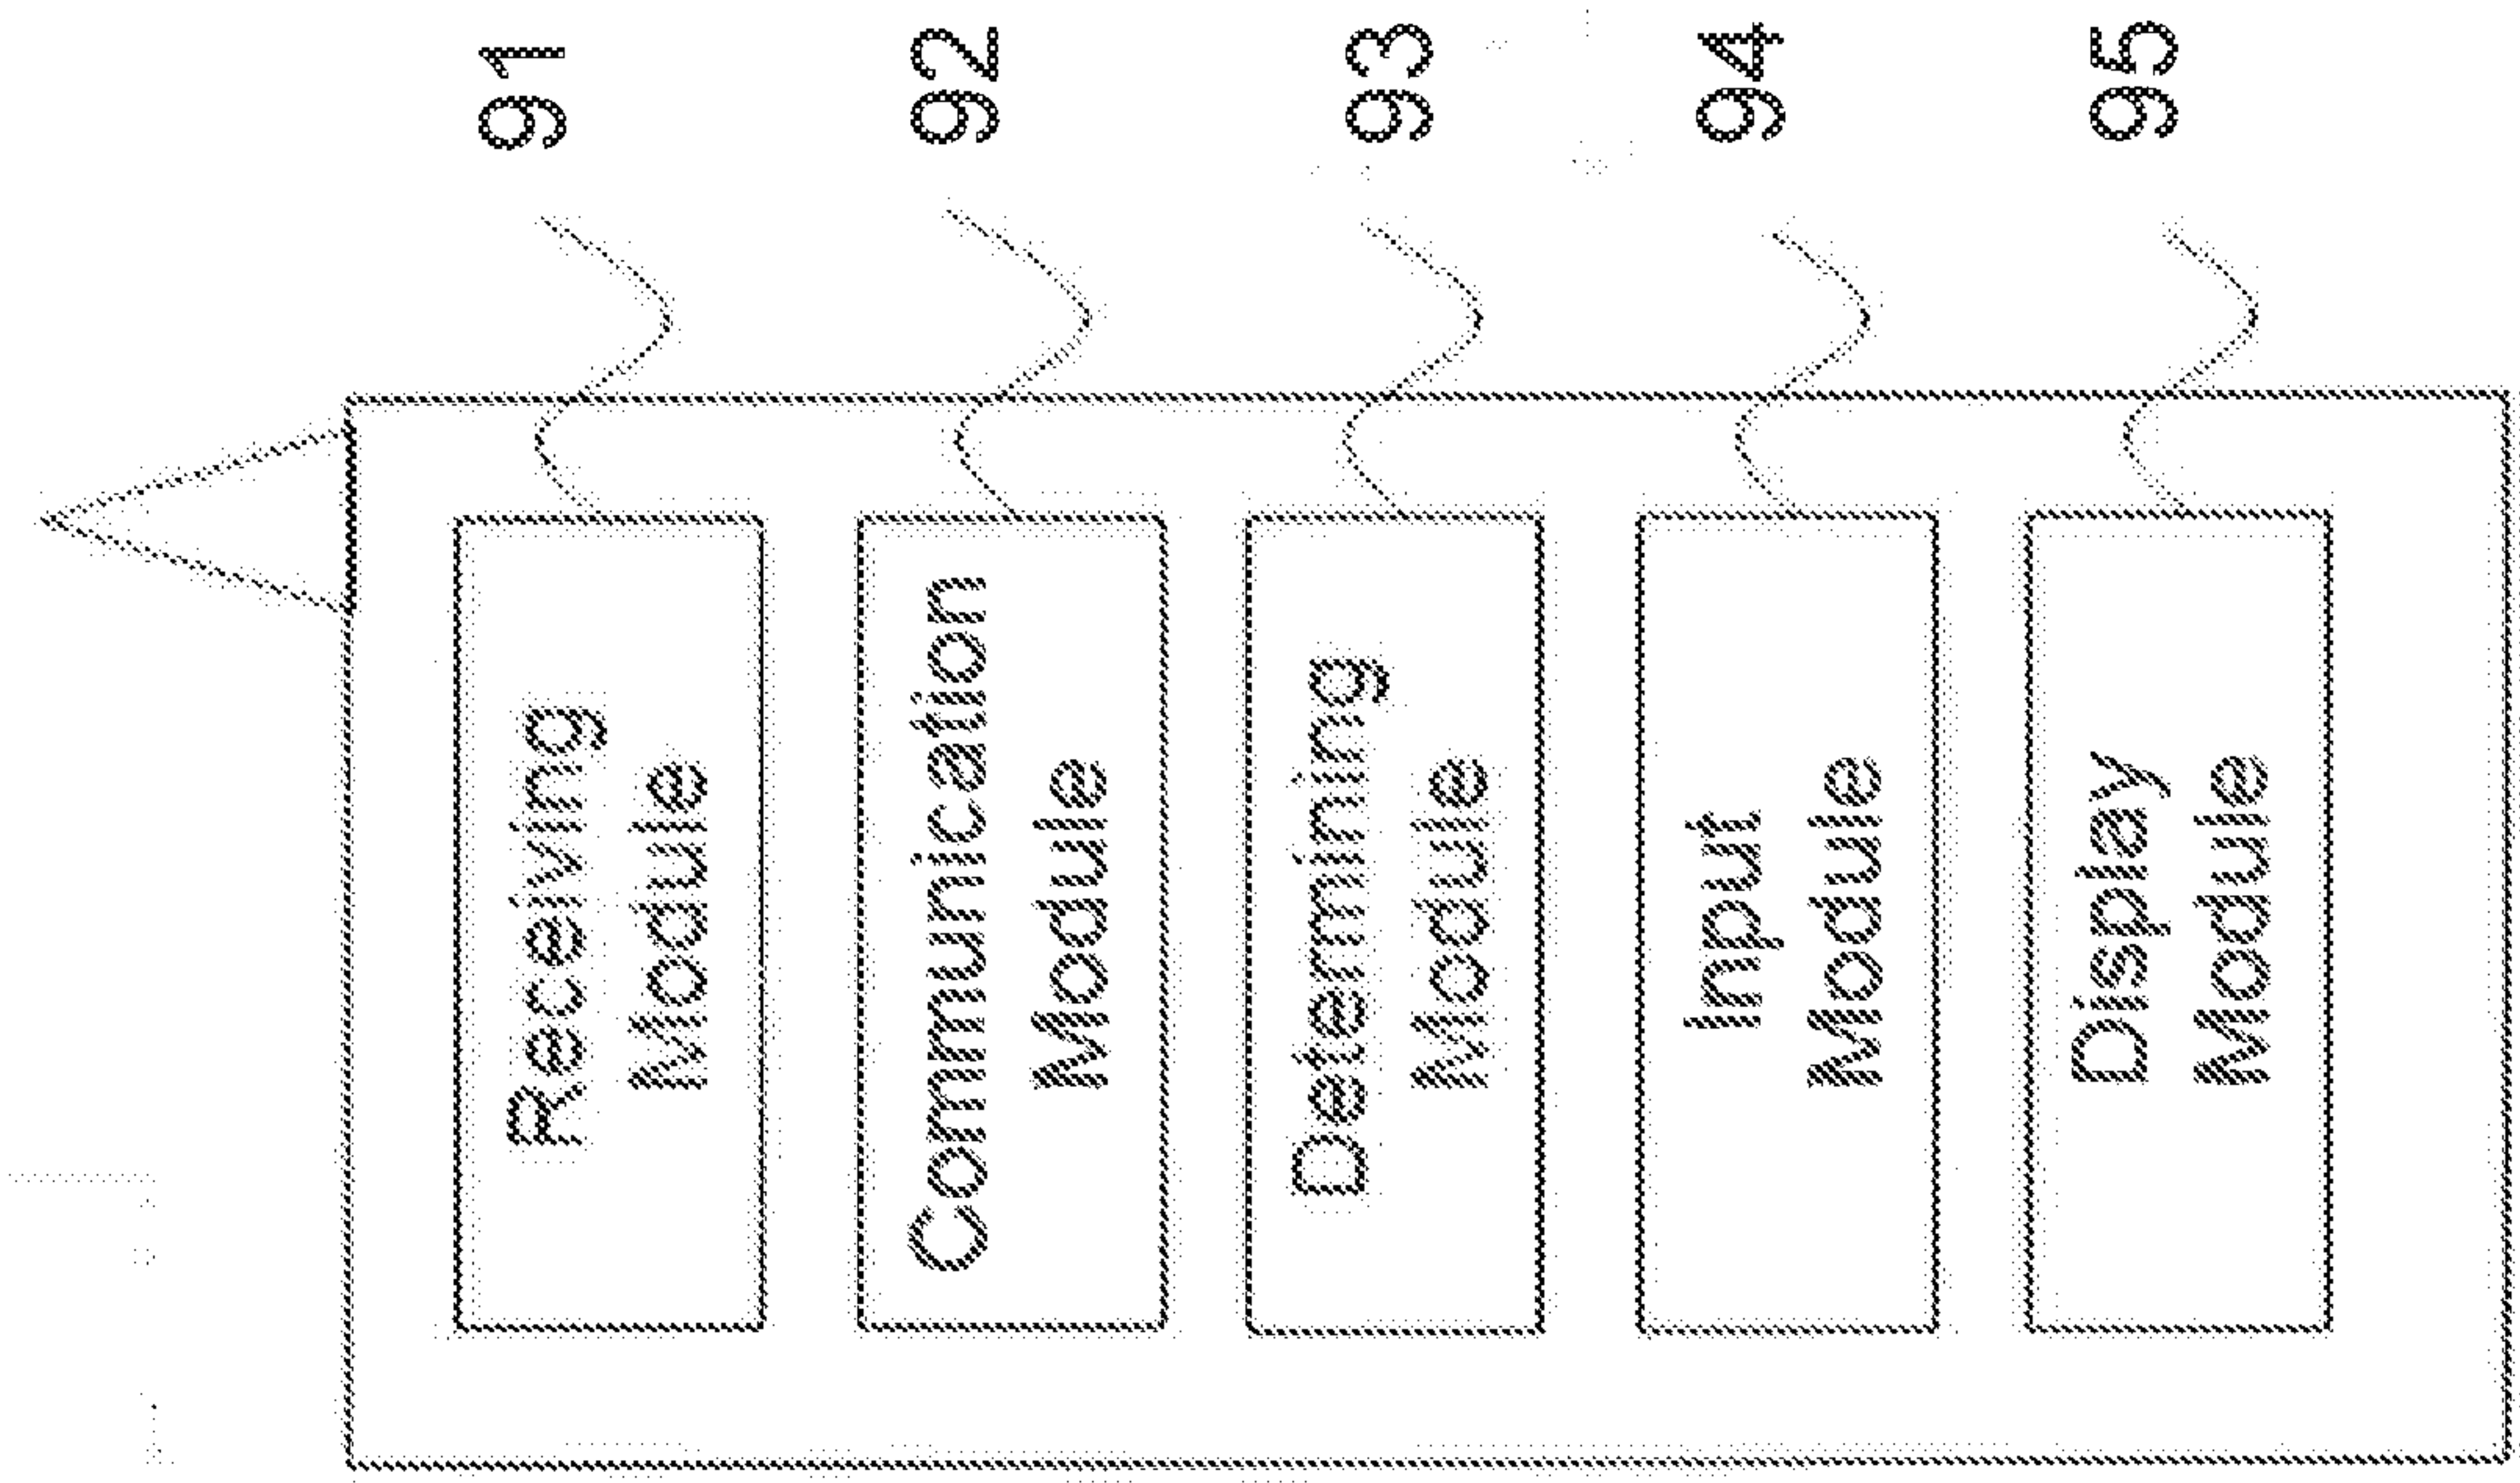


FIG. 9

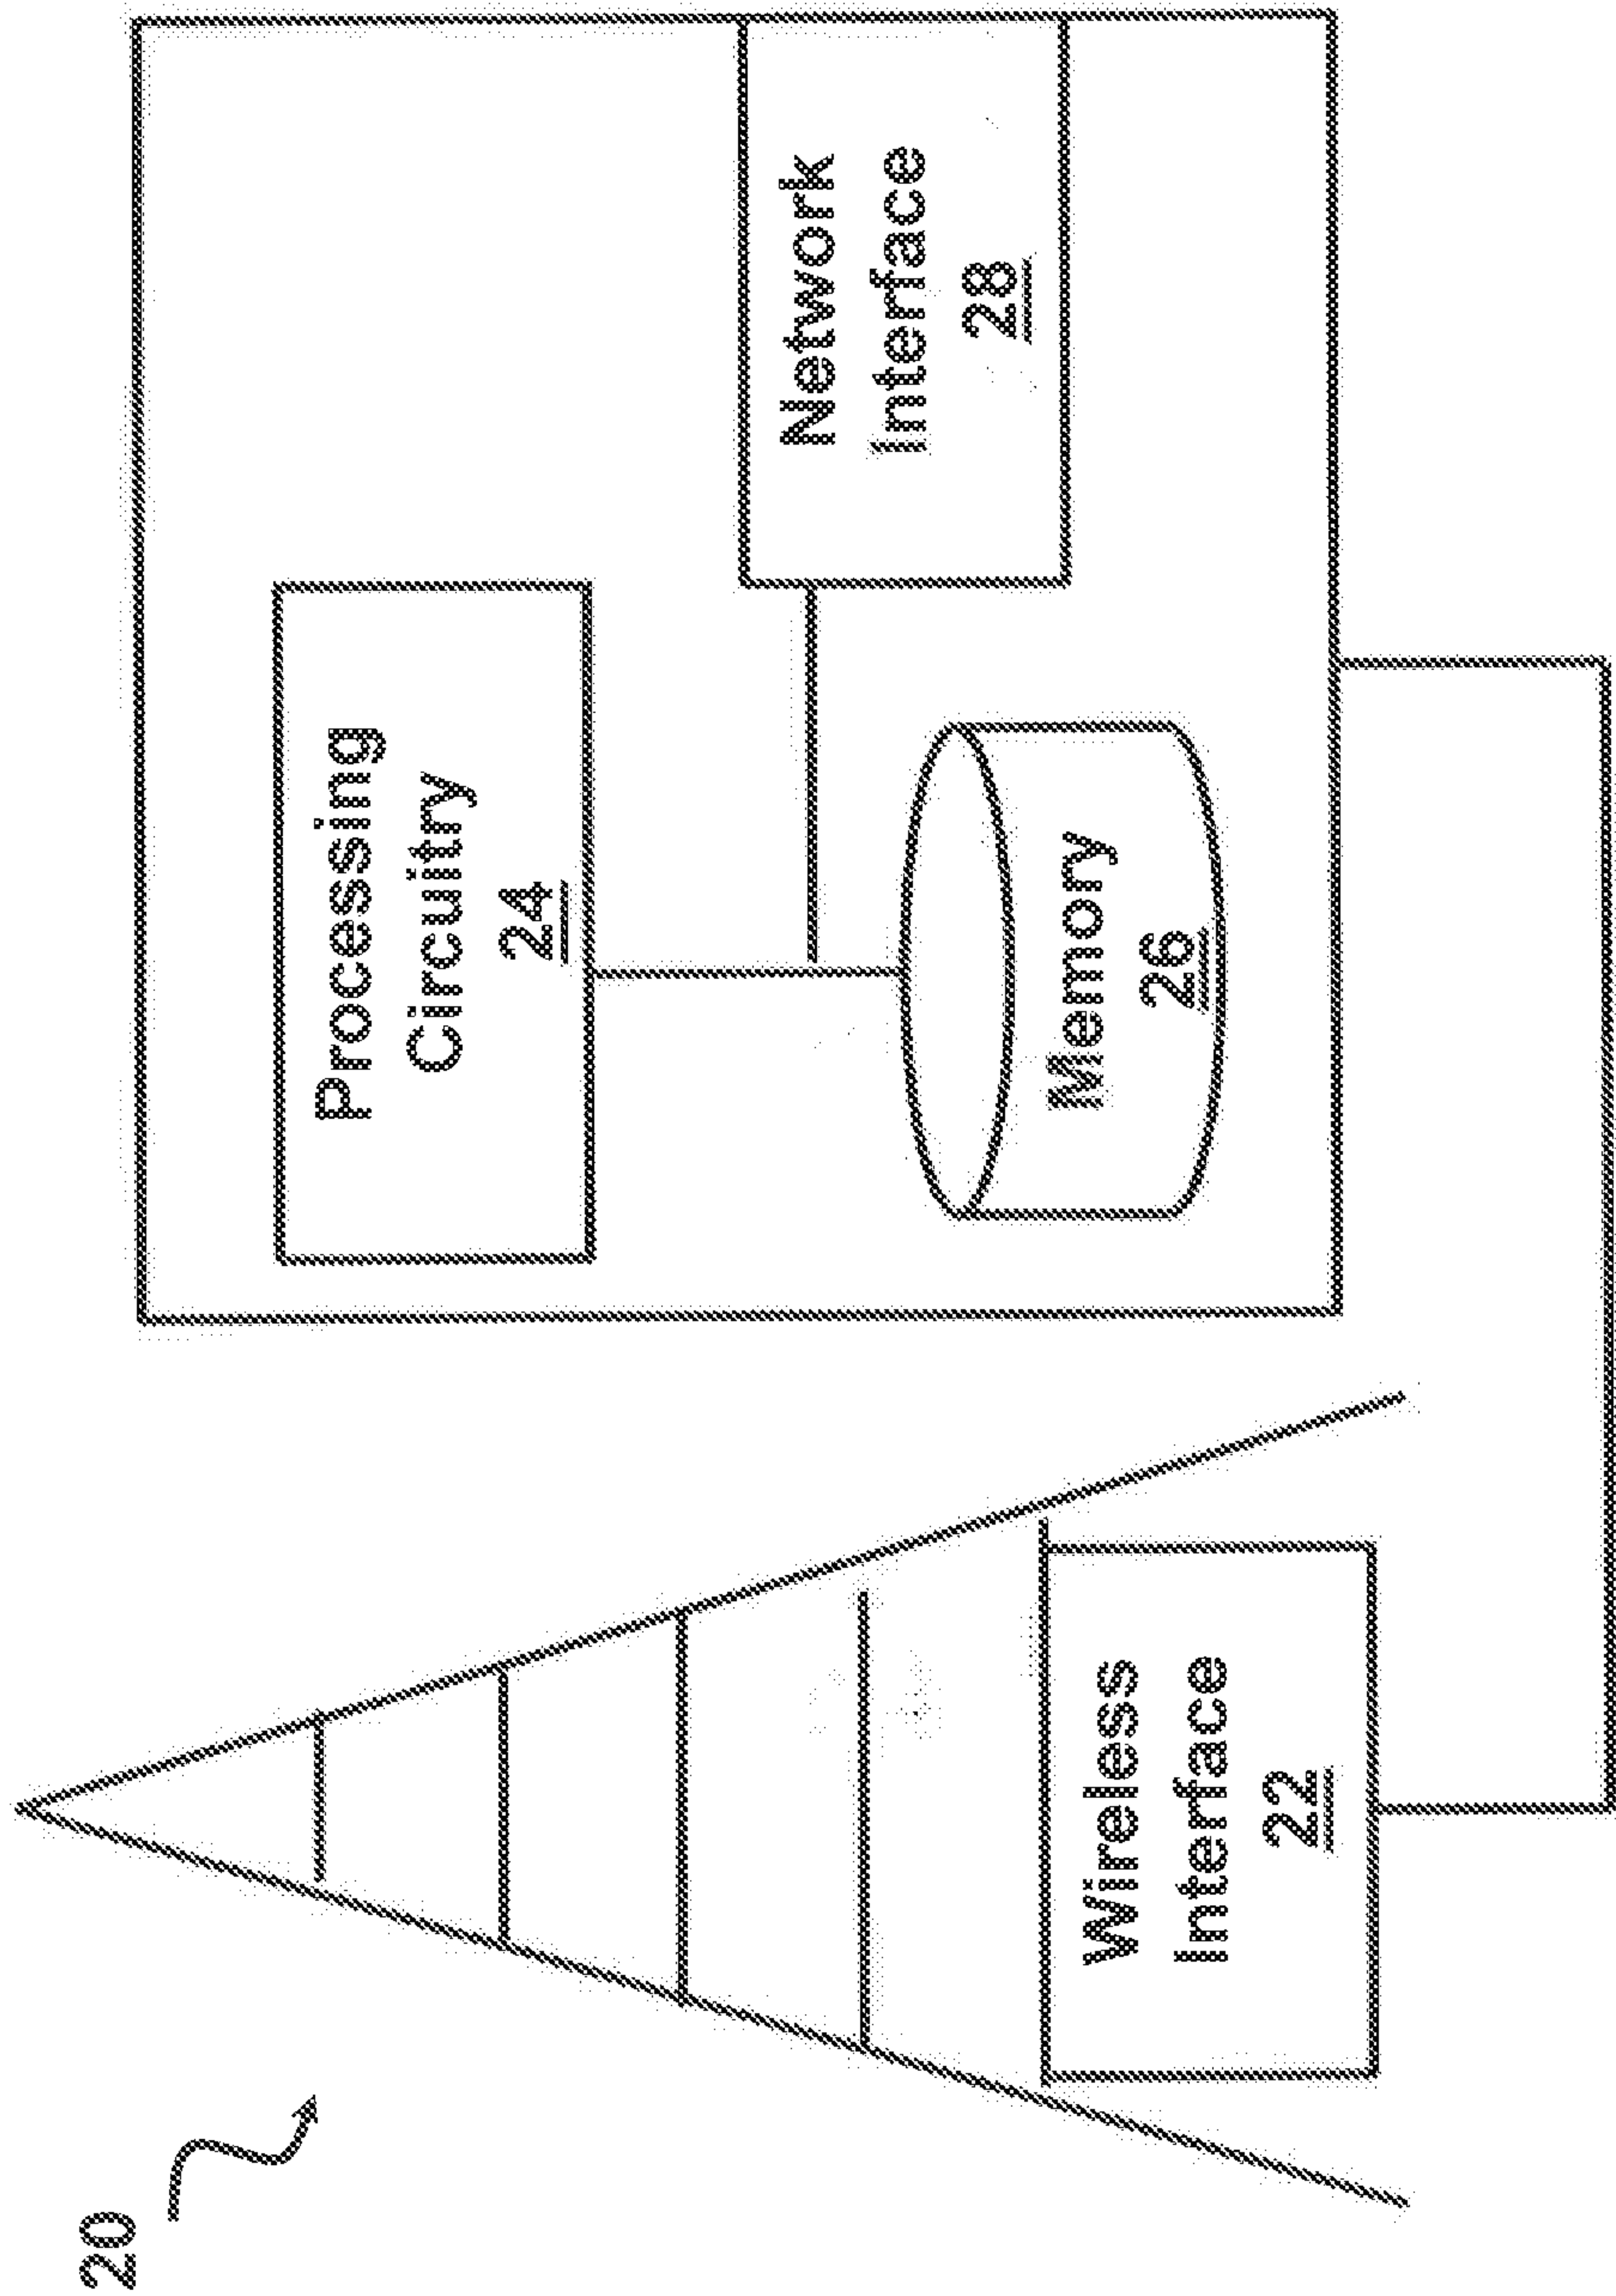


FIG. 10

20 or 30

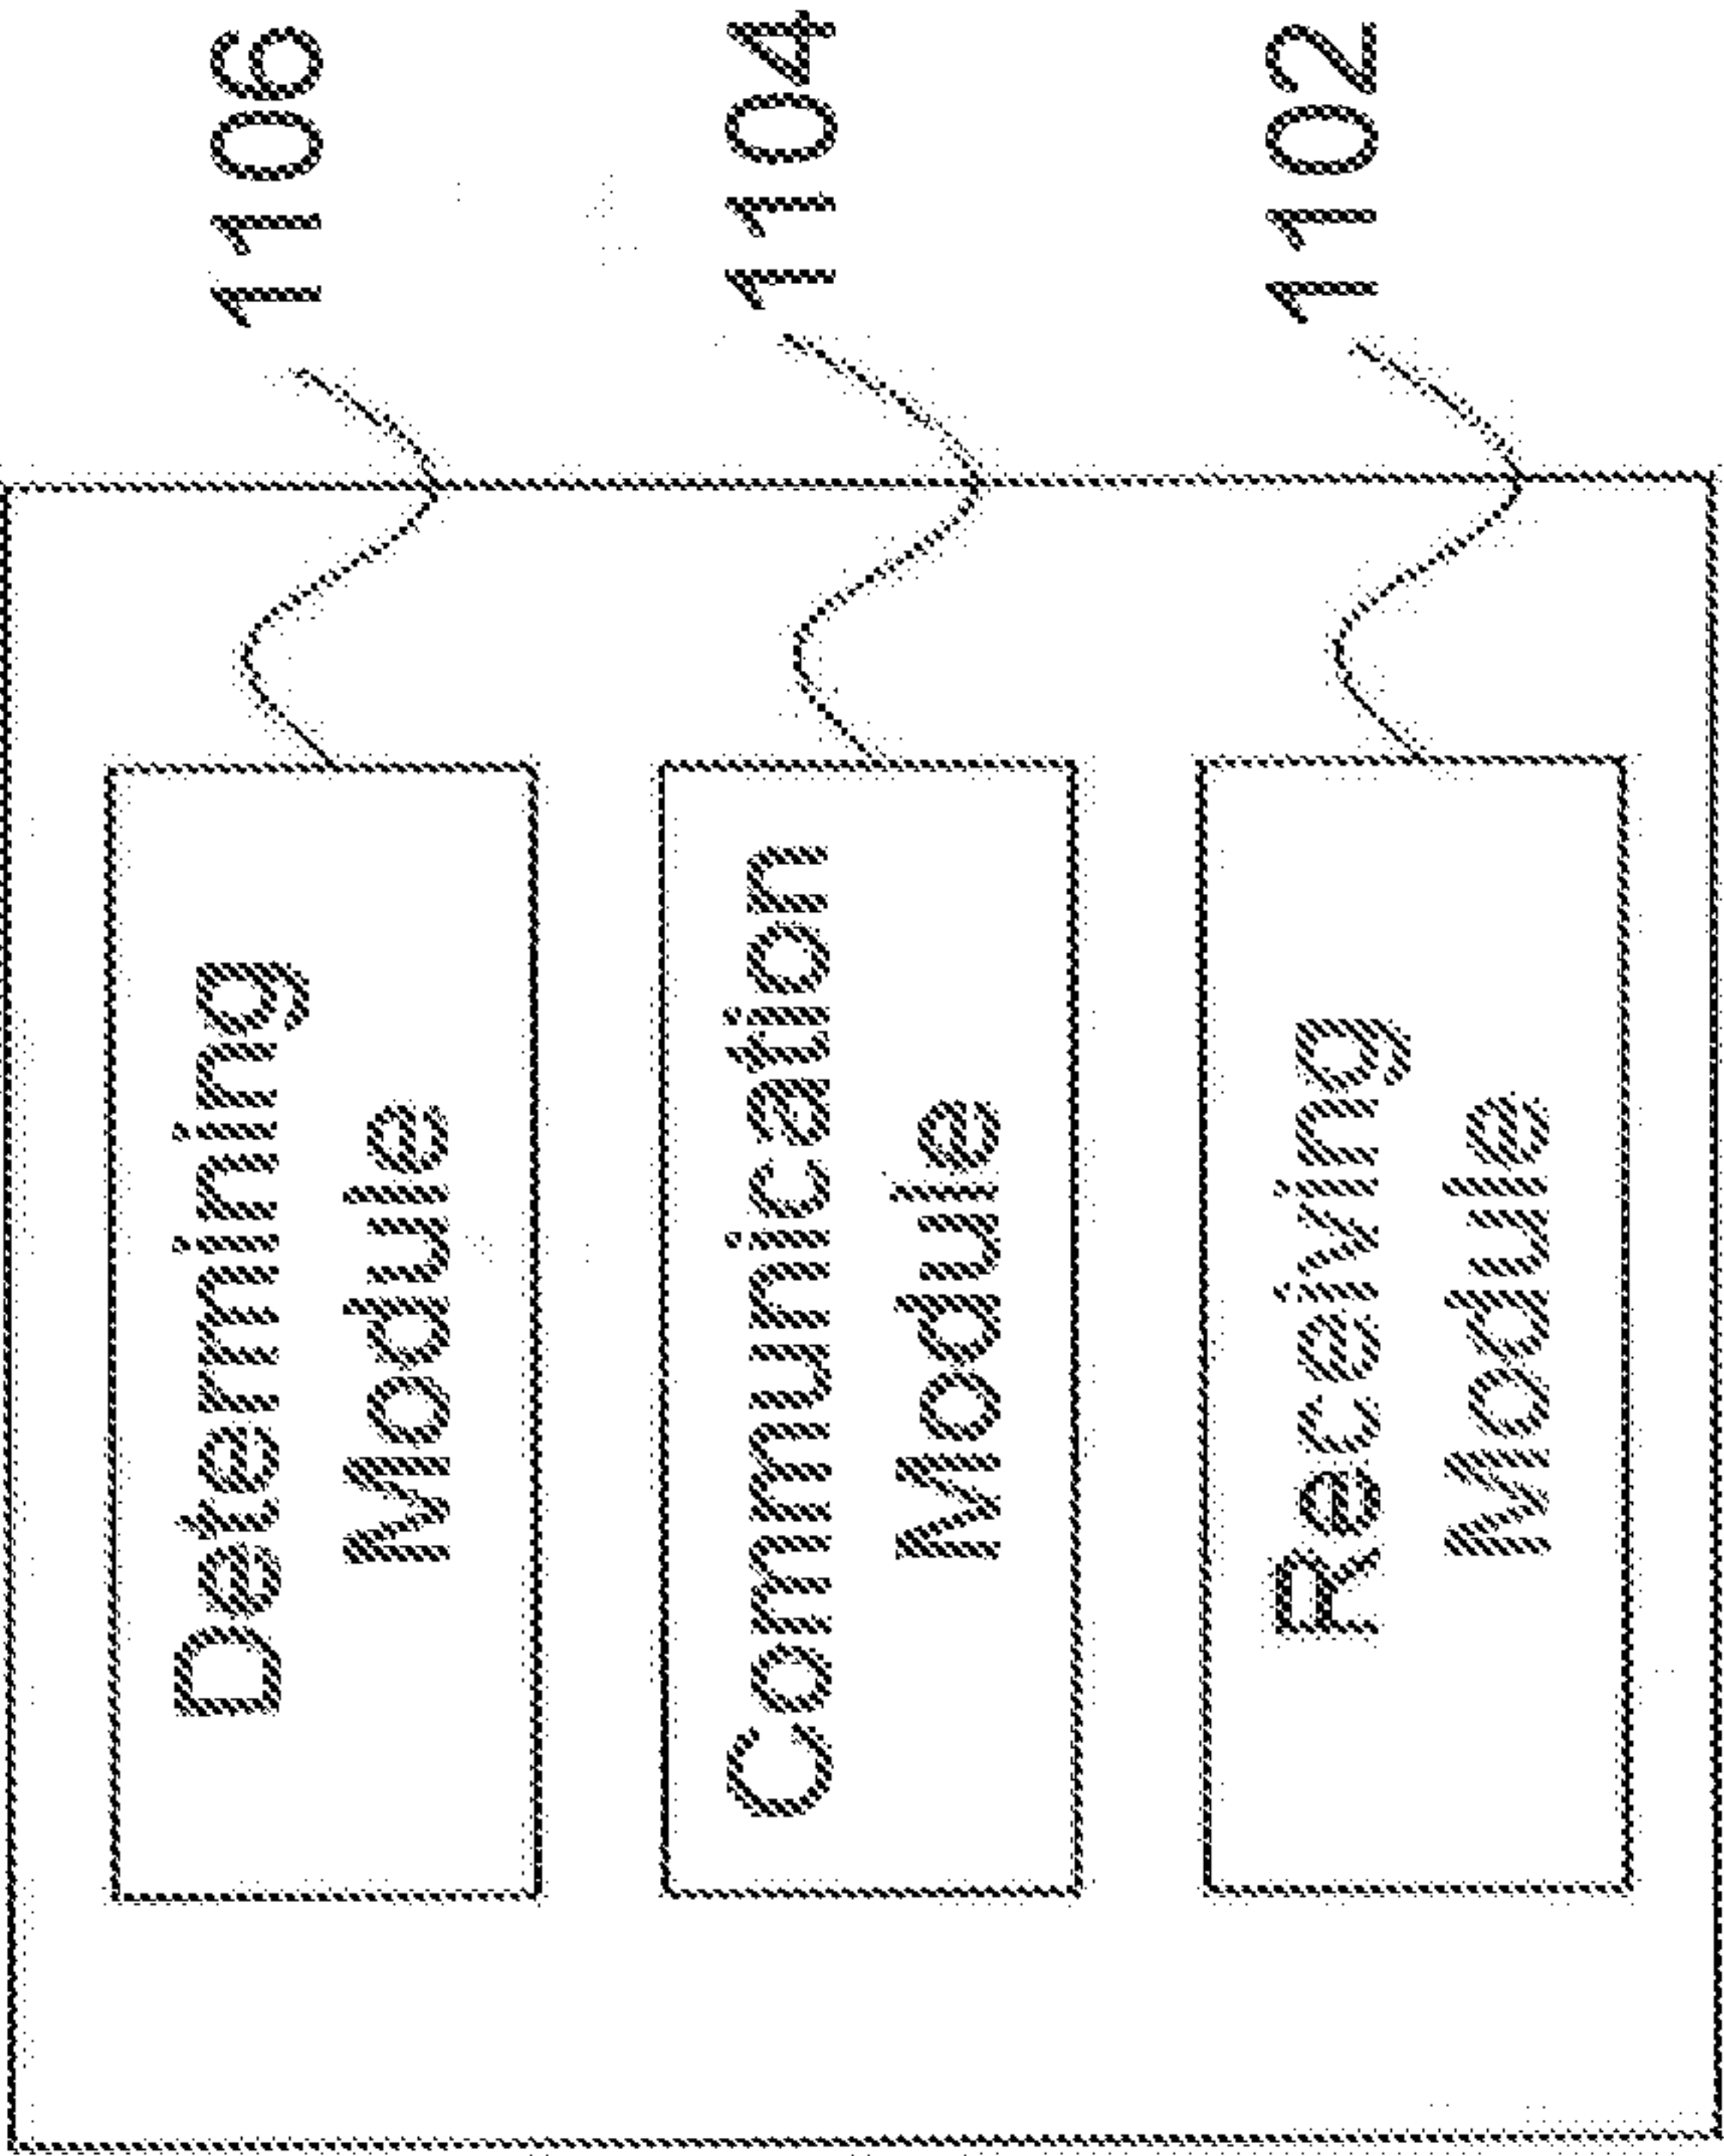


FIG. 11

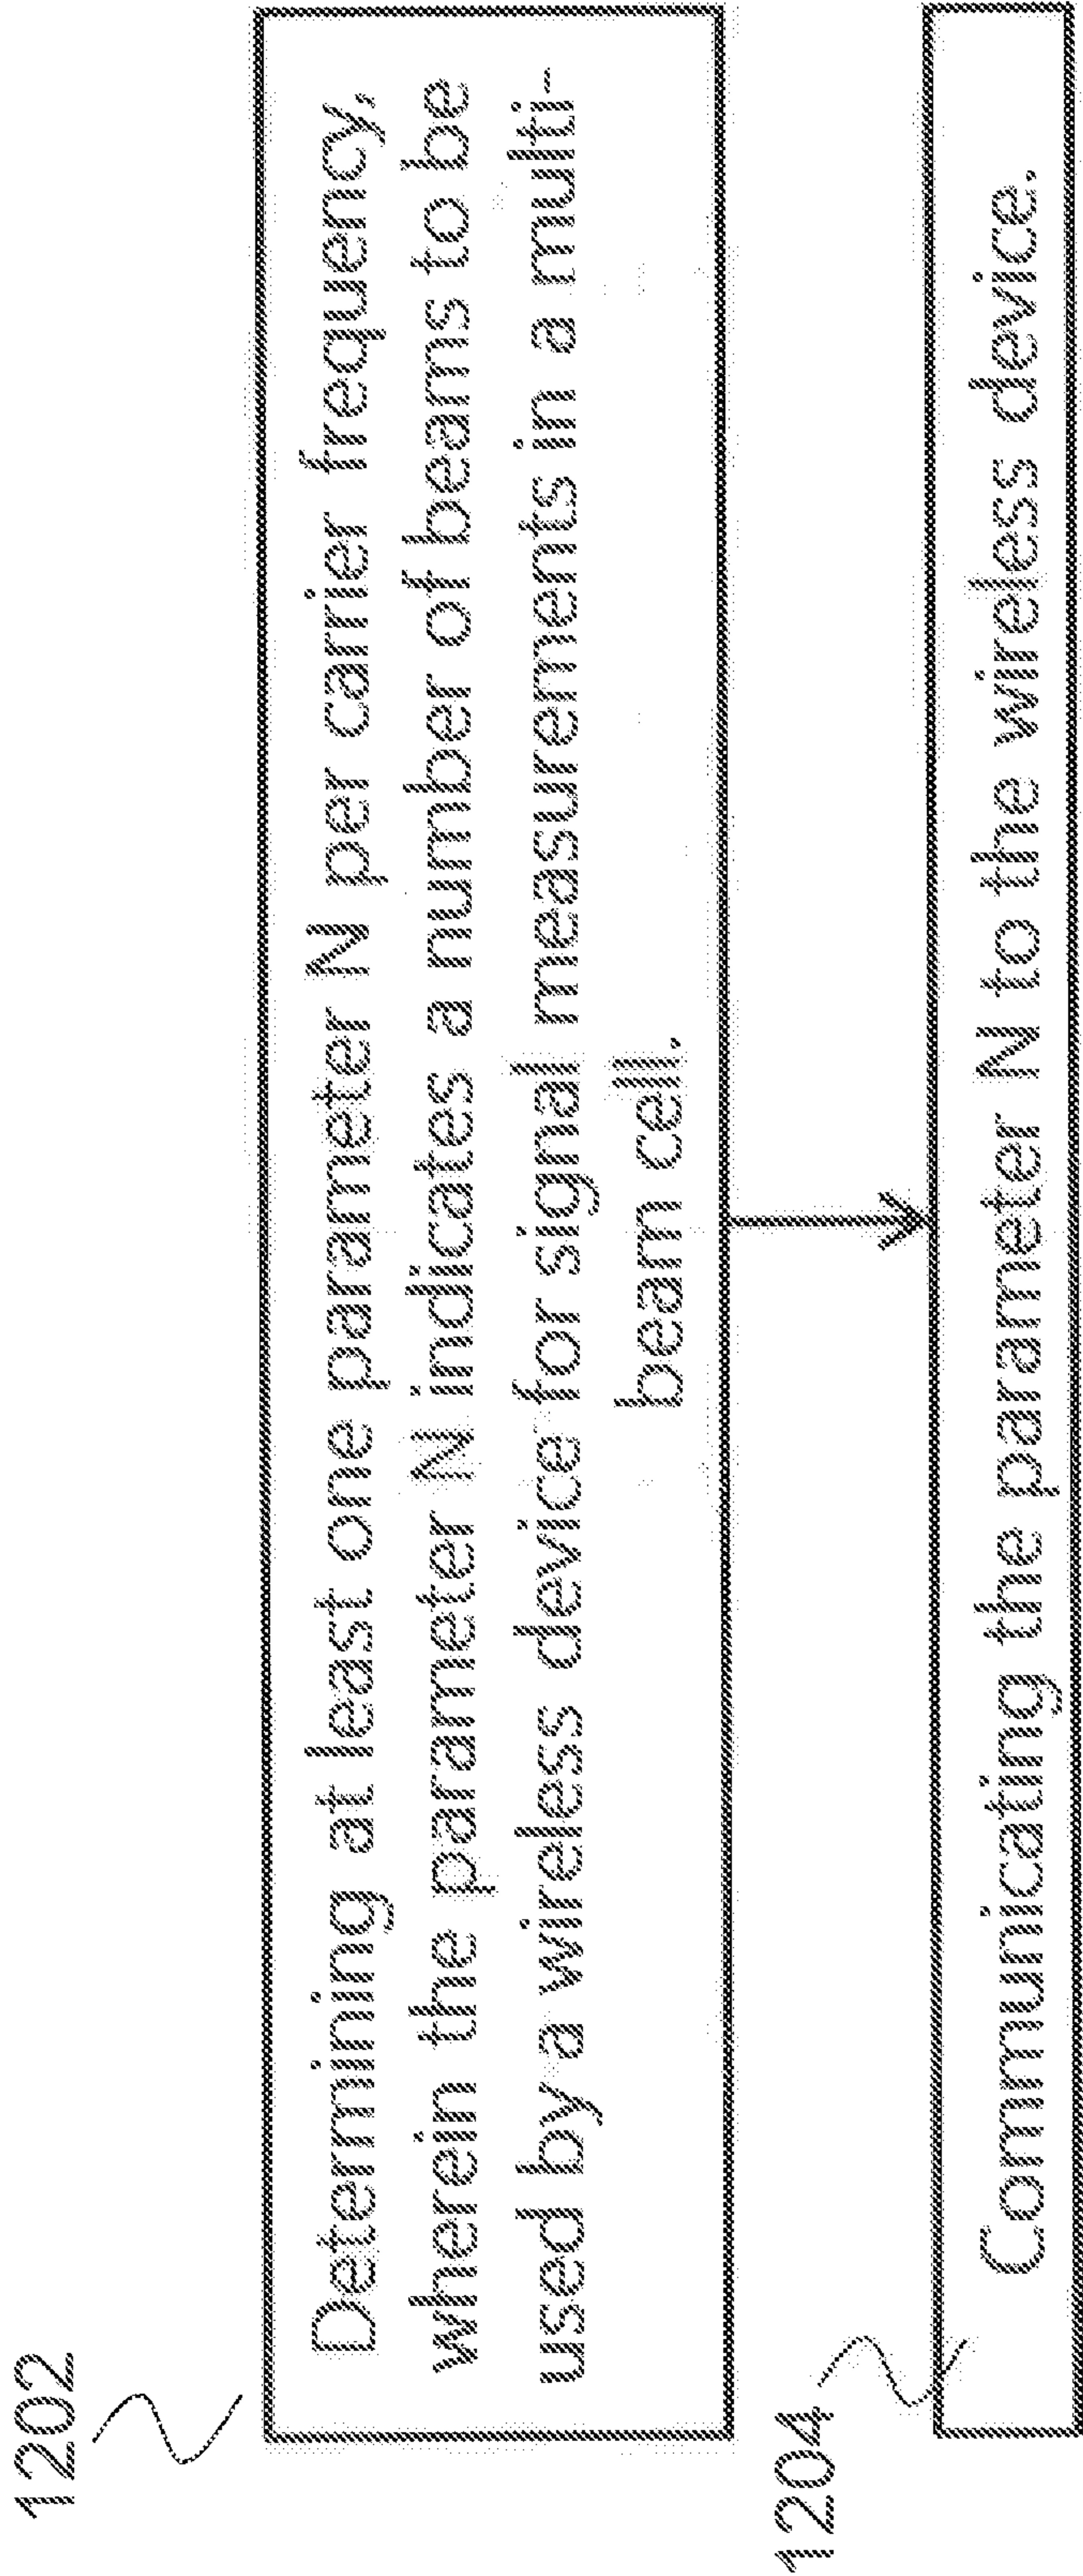


FIG. 12

1302

Receiving, from a network node, at least one parameter N per carrier frequency, wherein the parameter N indicates a number of beams to be used by a wireless device for signal measurements in a multi-beam cell.

1304

using the at least one parameter N.

FIG. 13

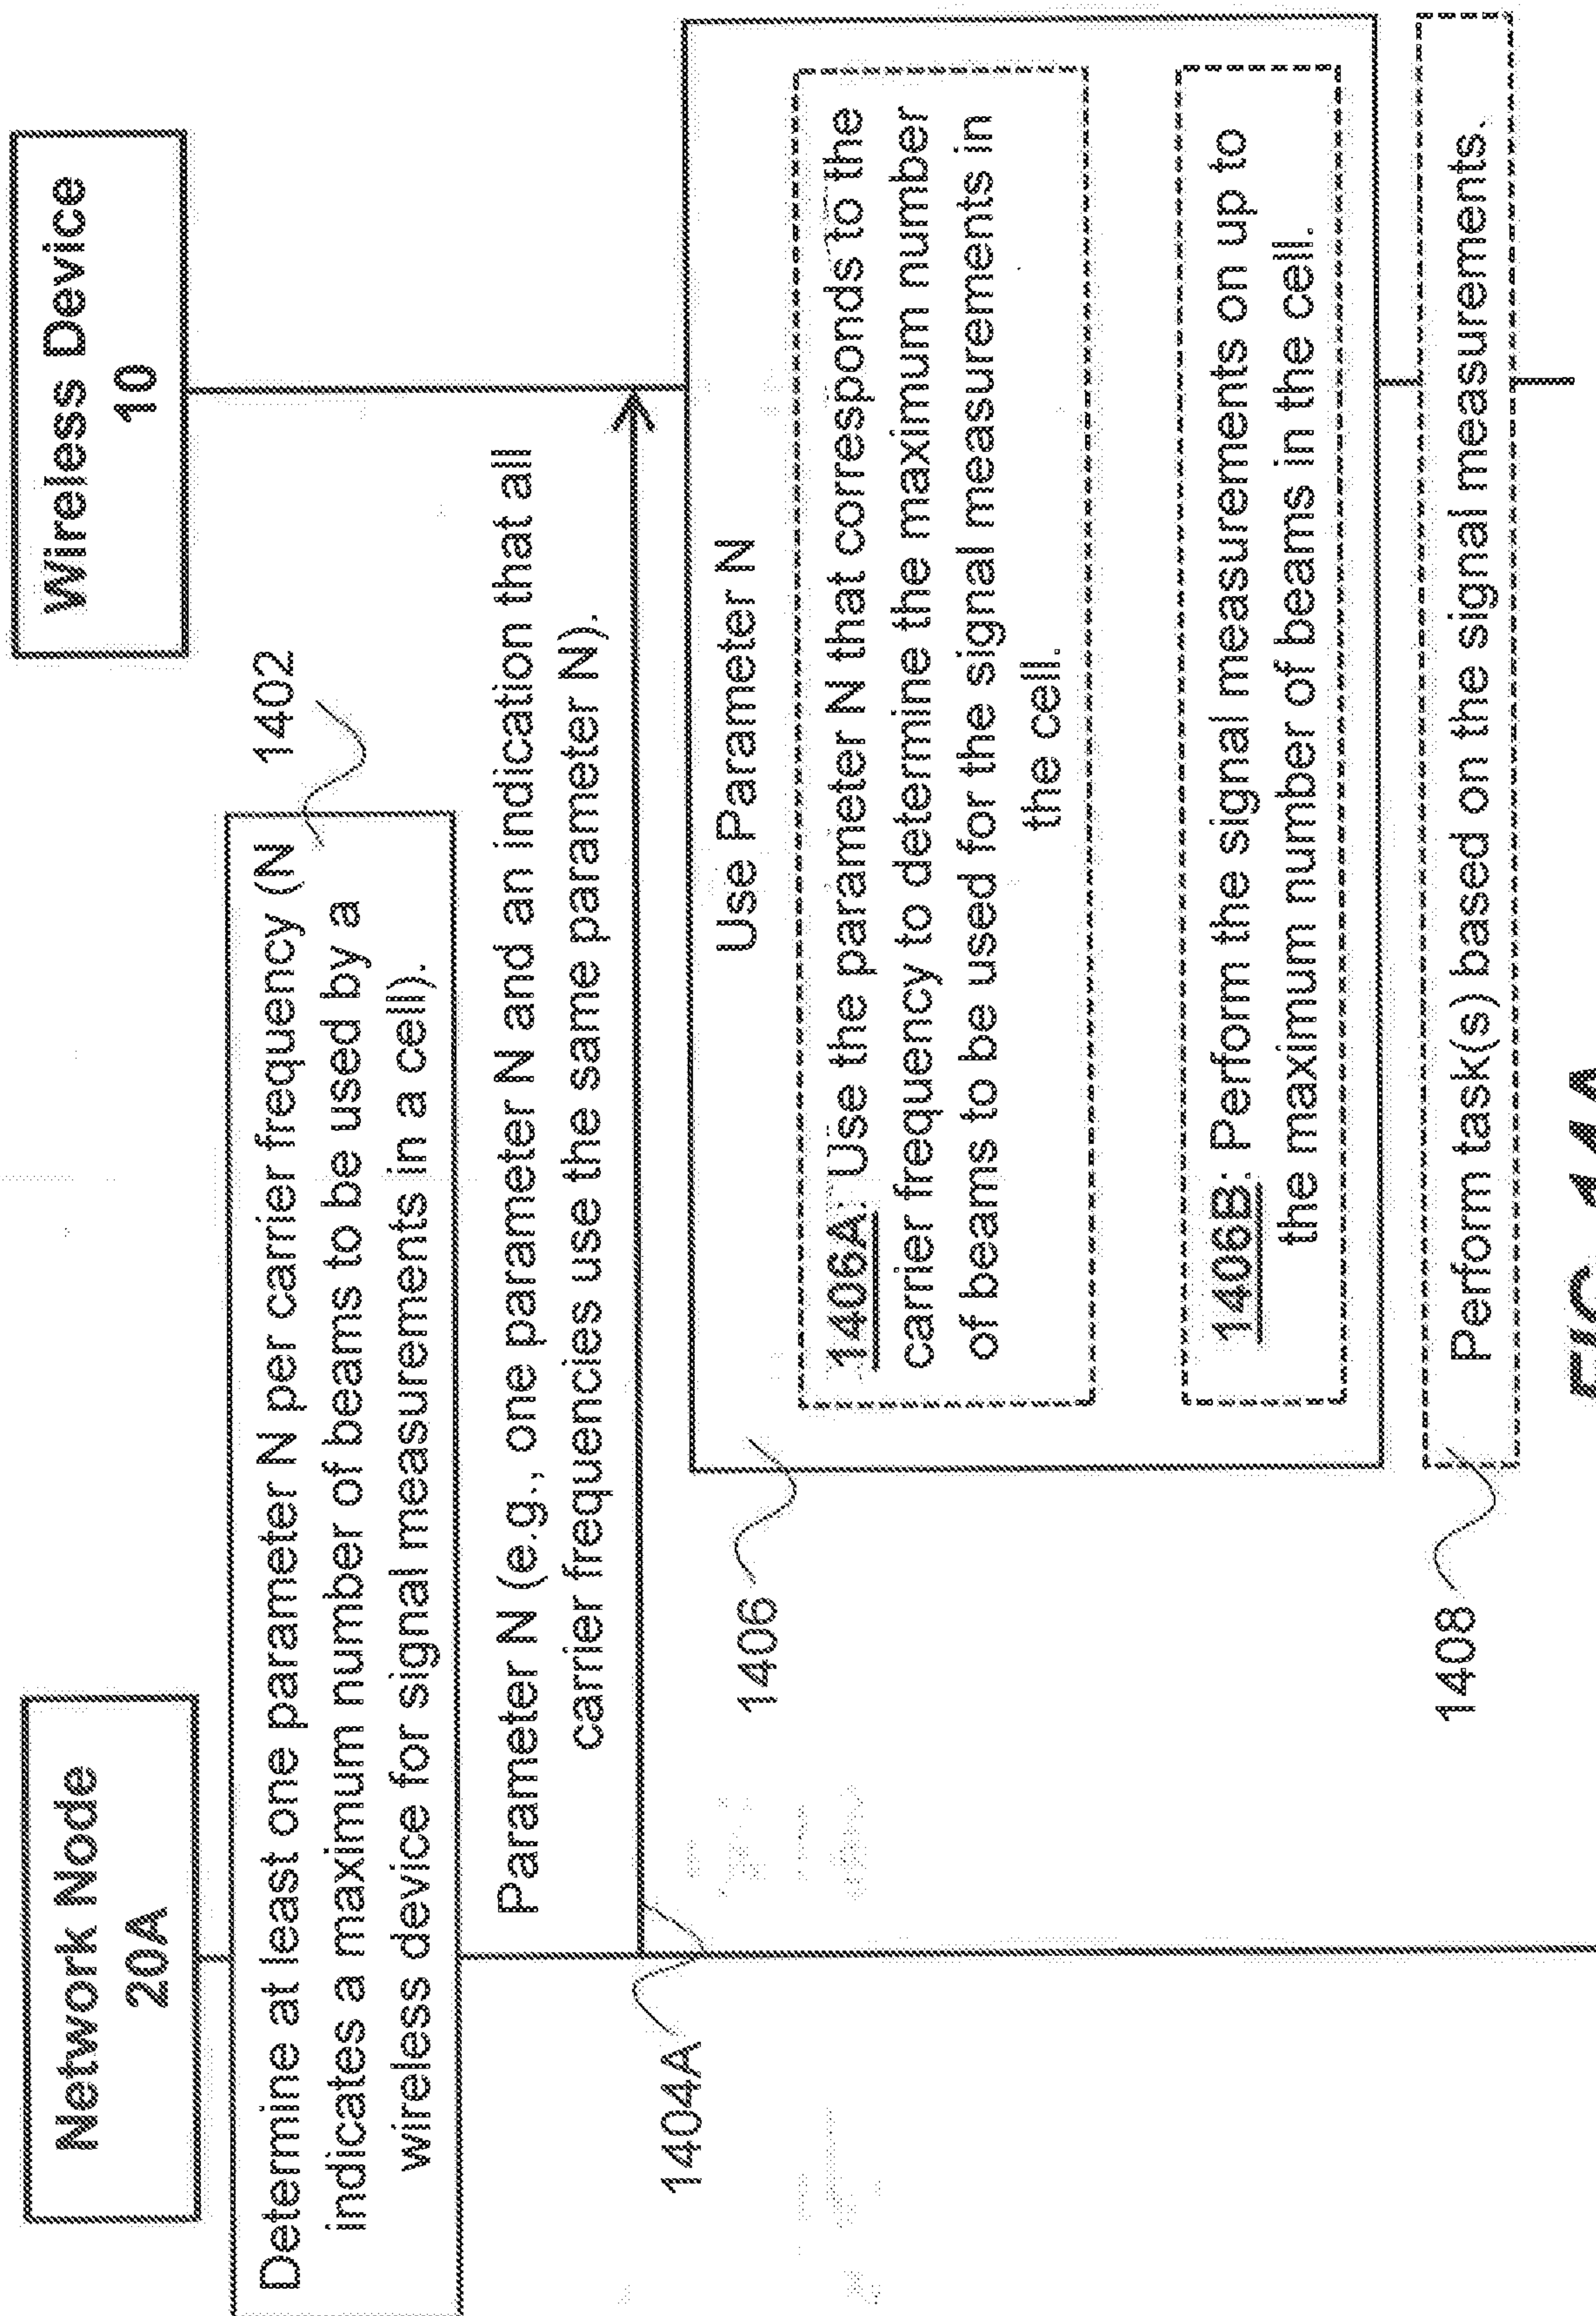


FIG. 14A

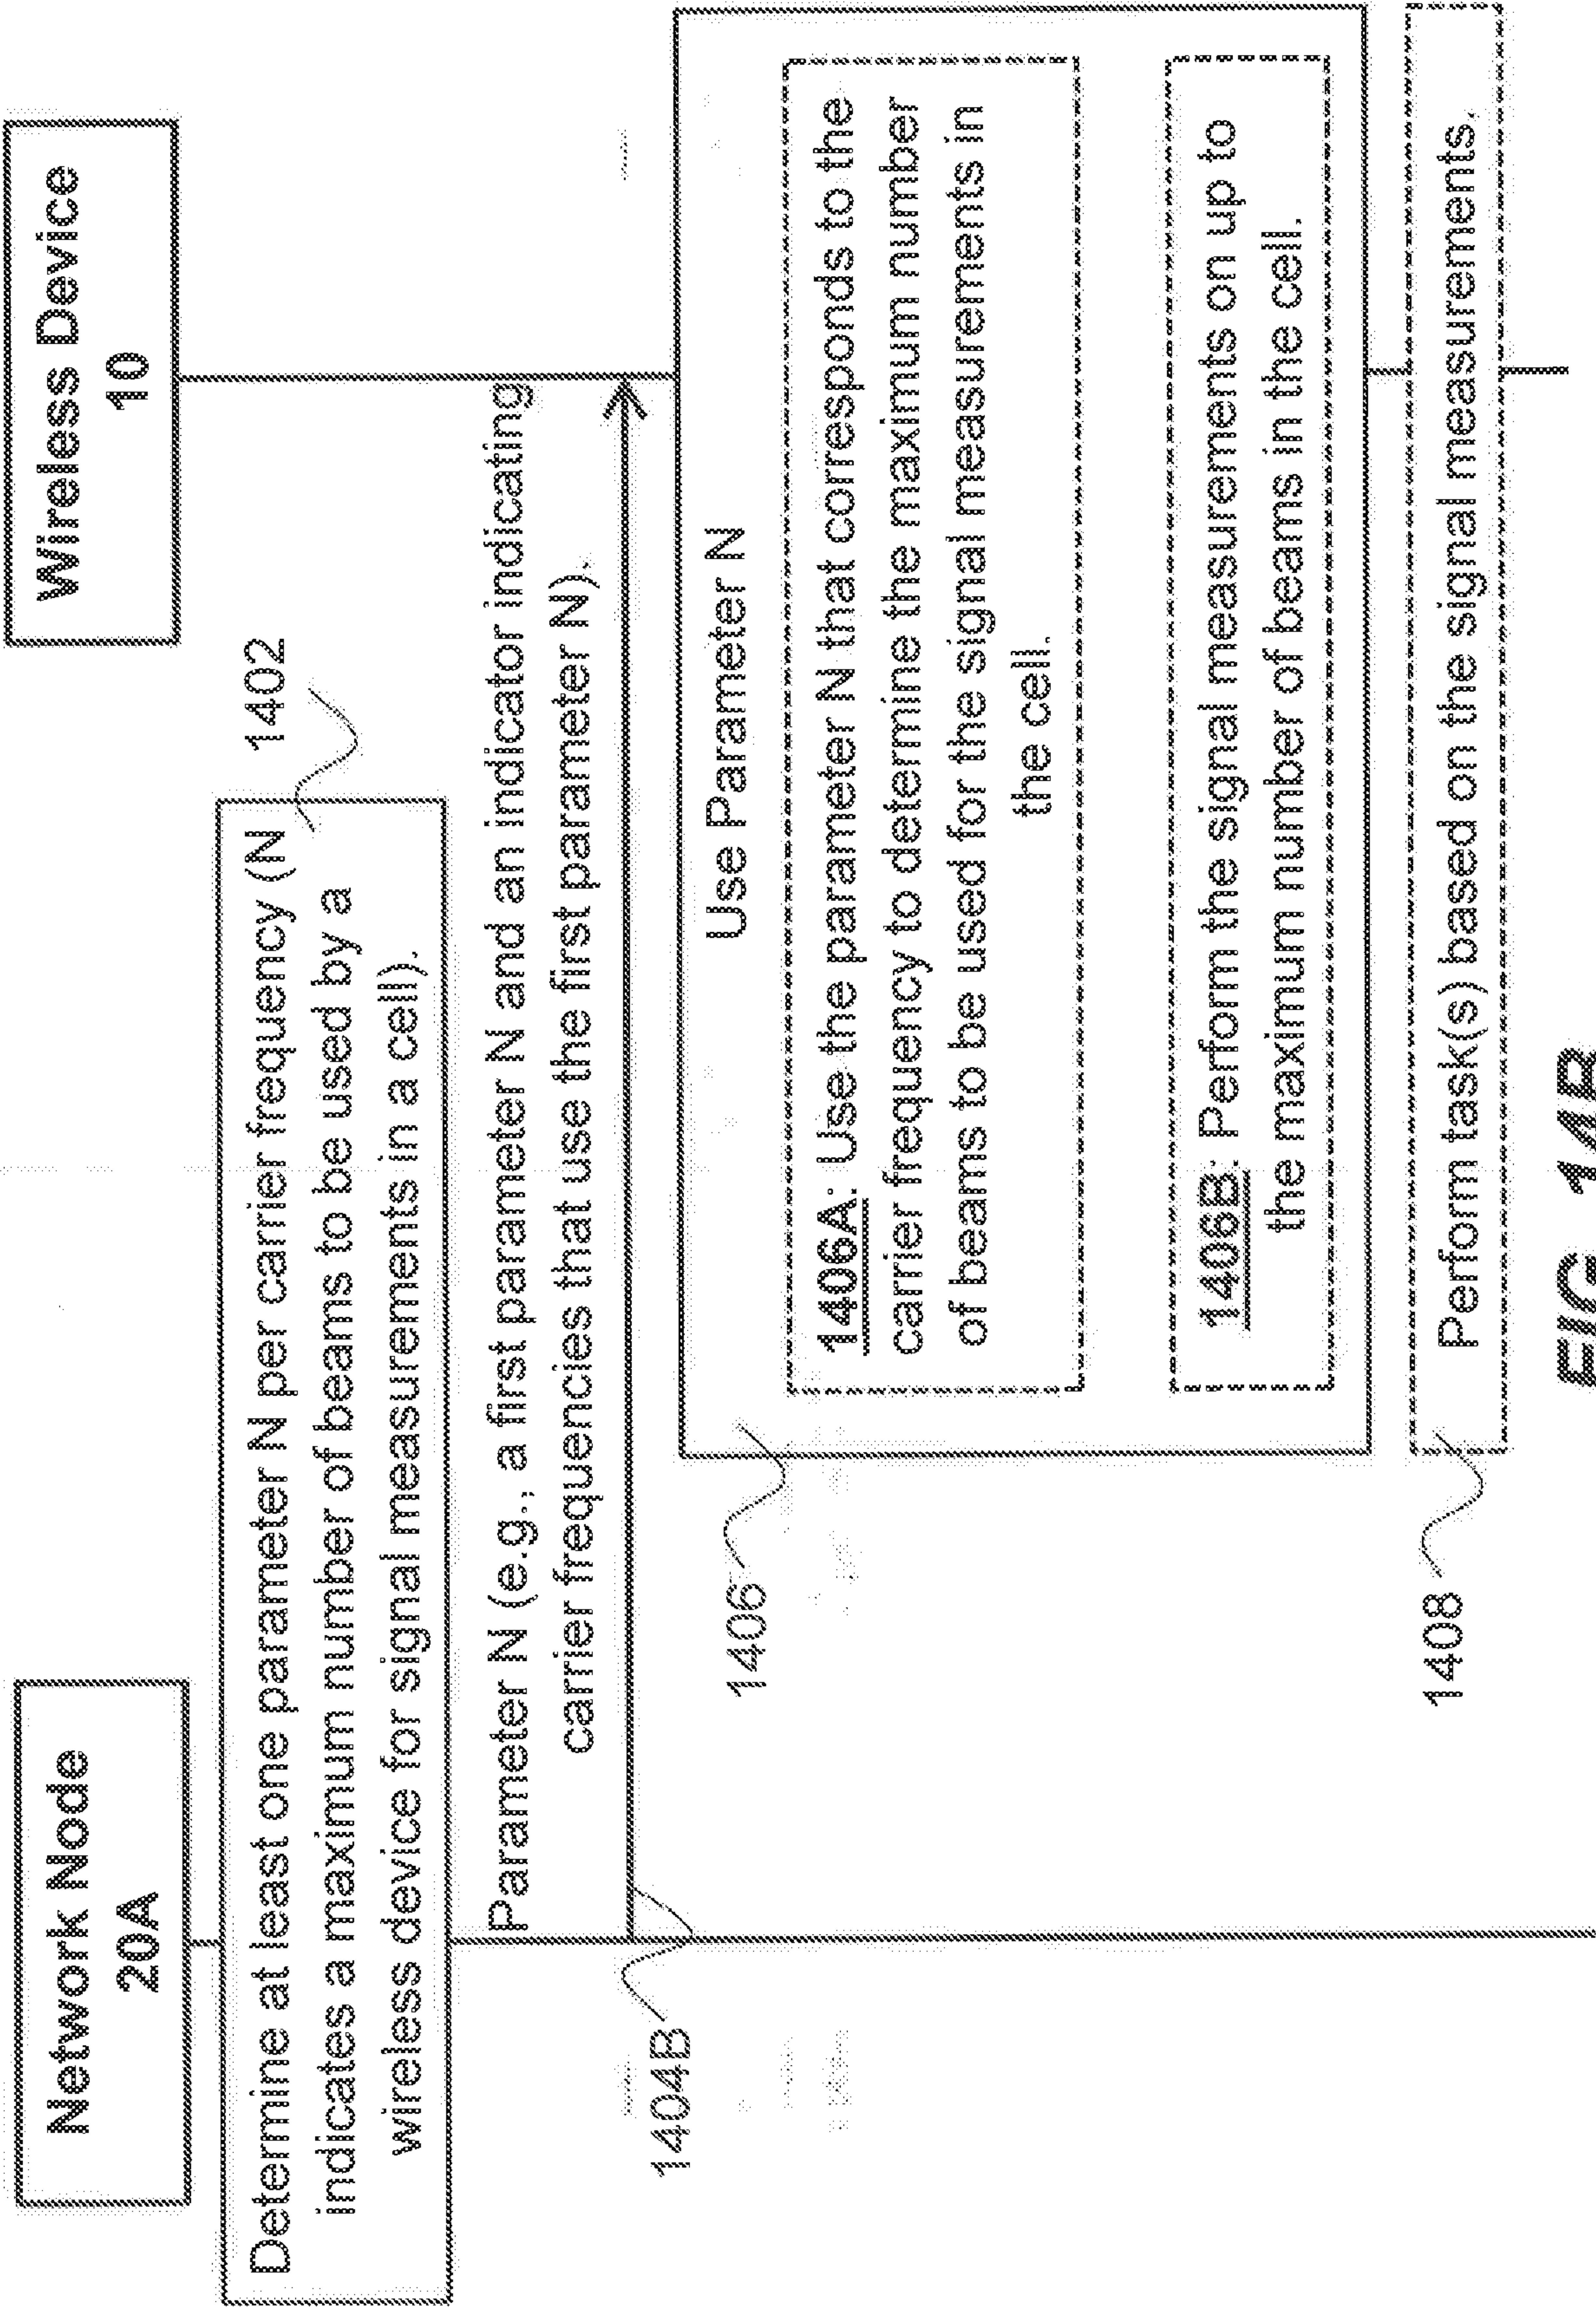
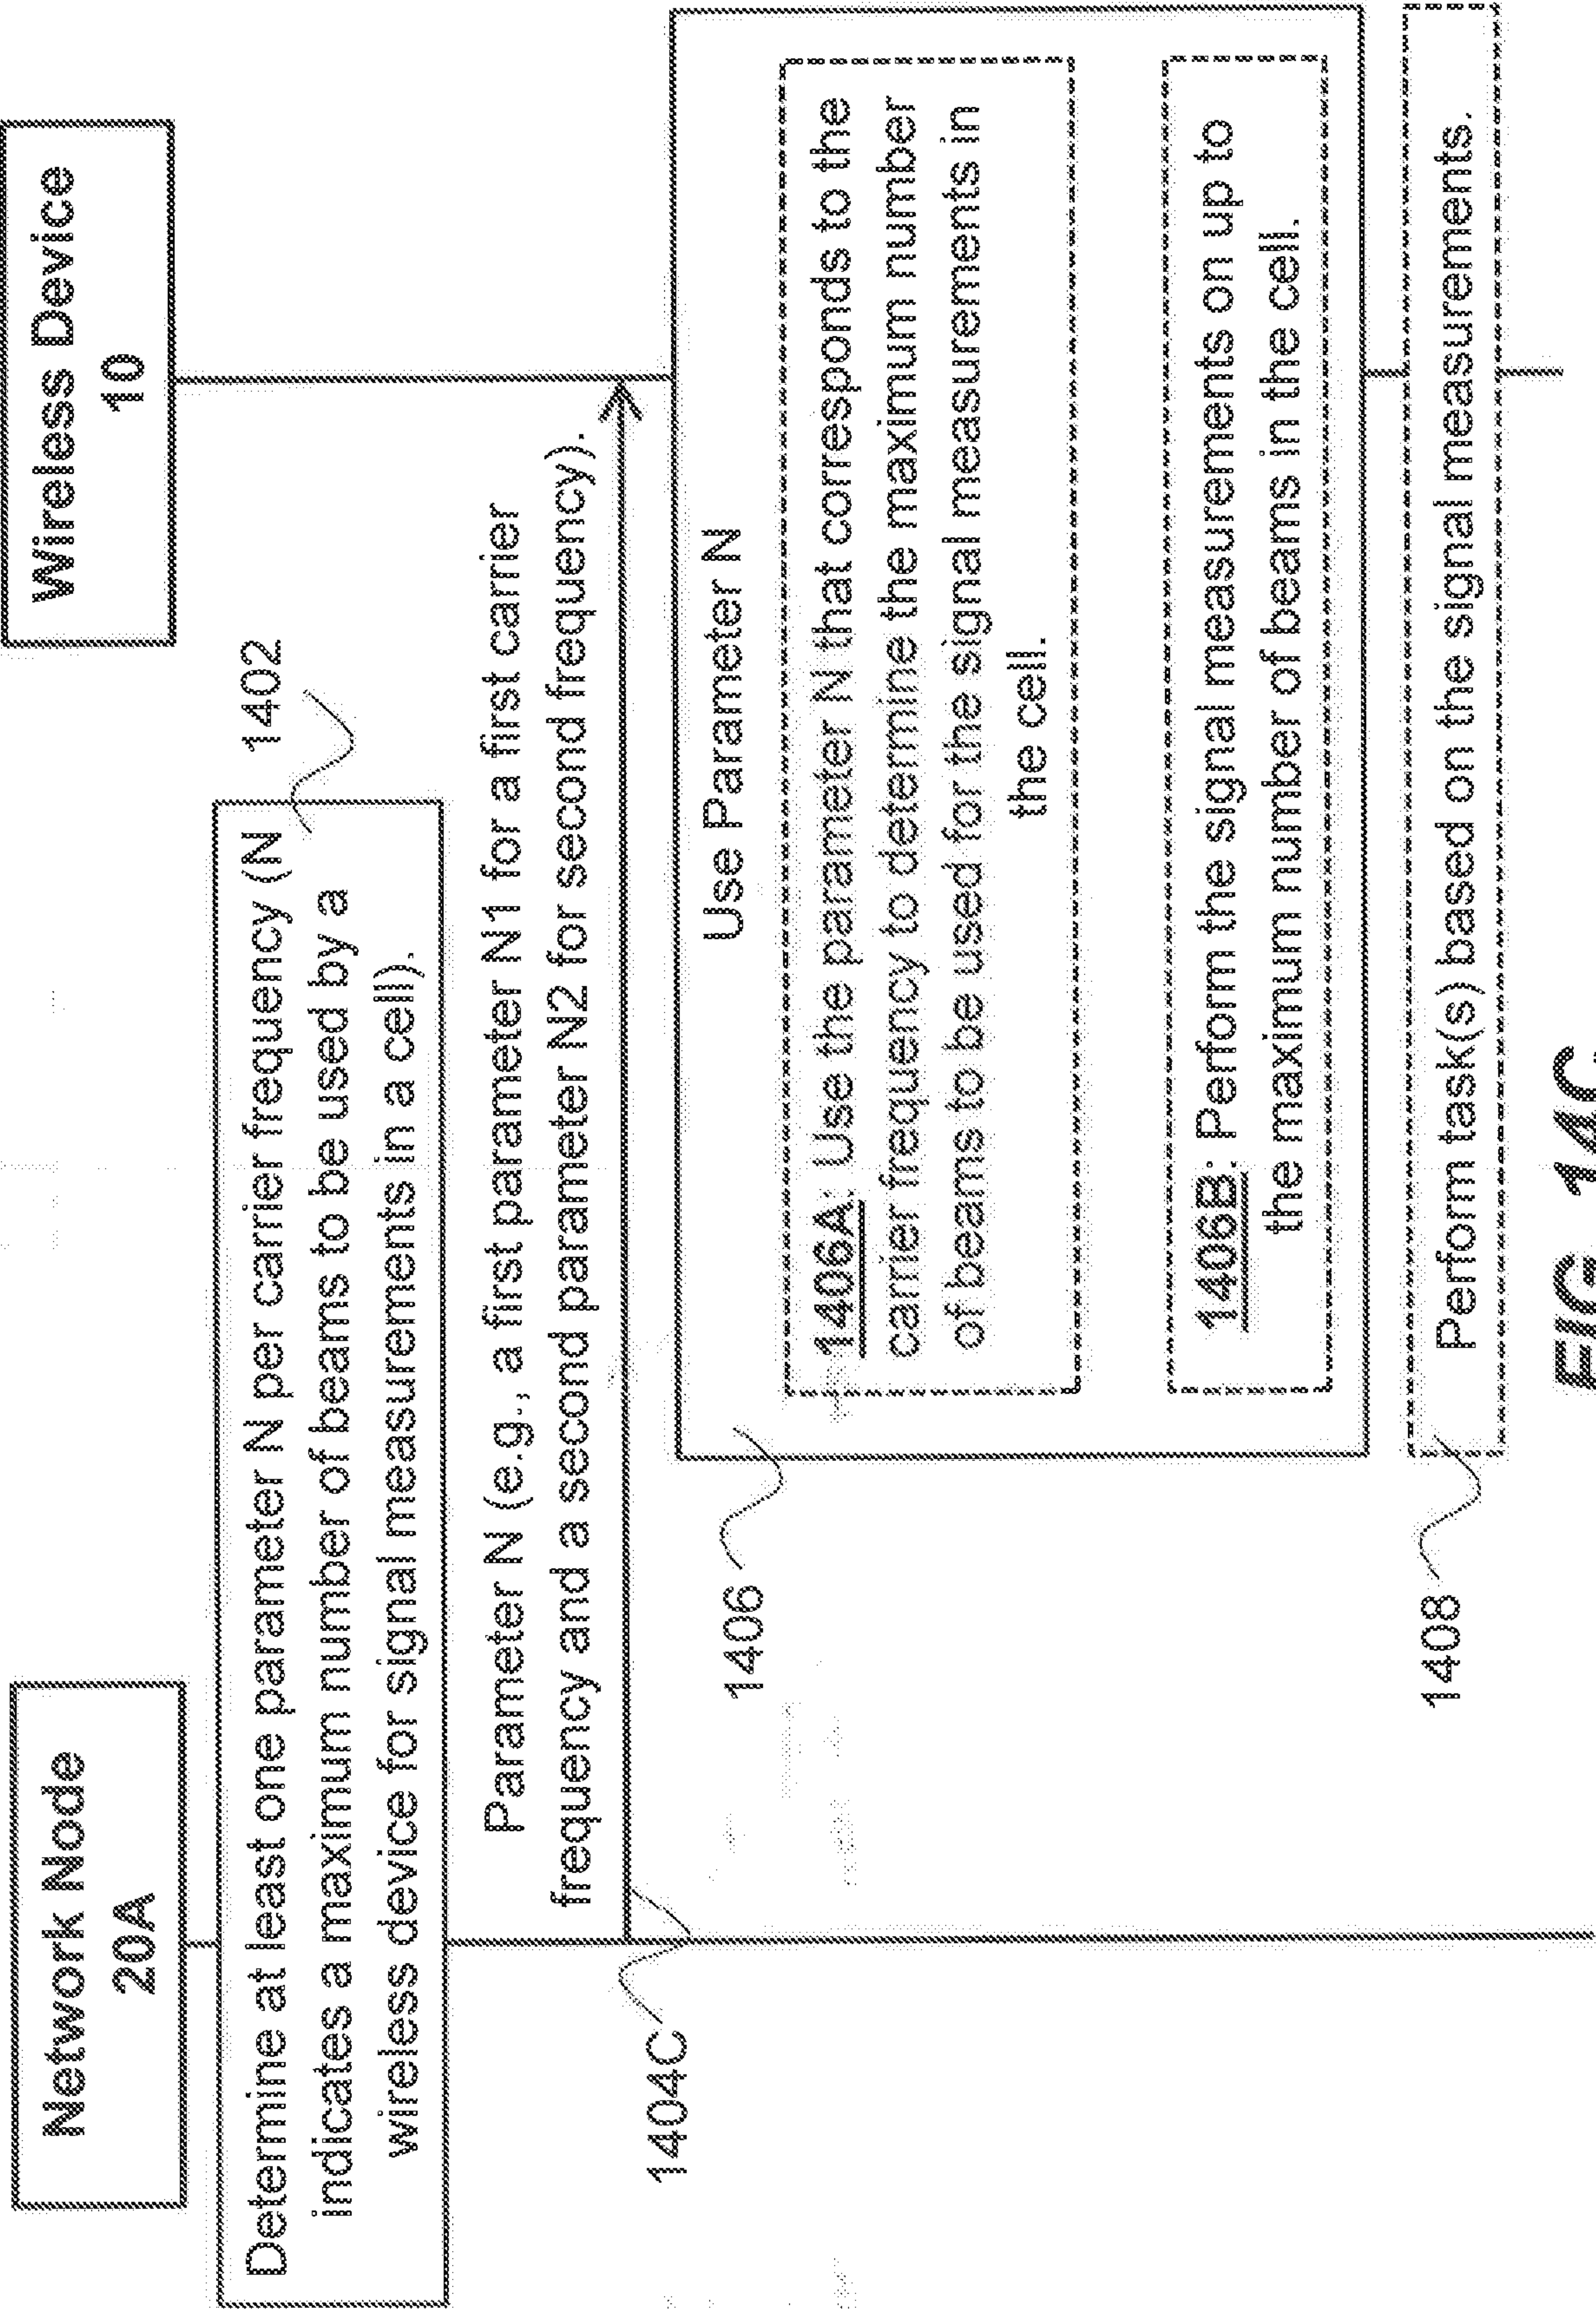
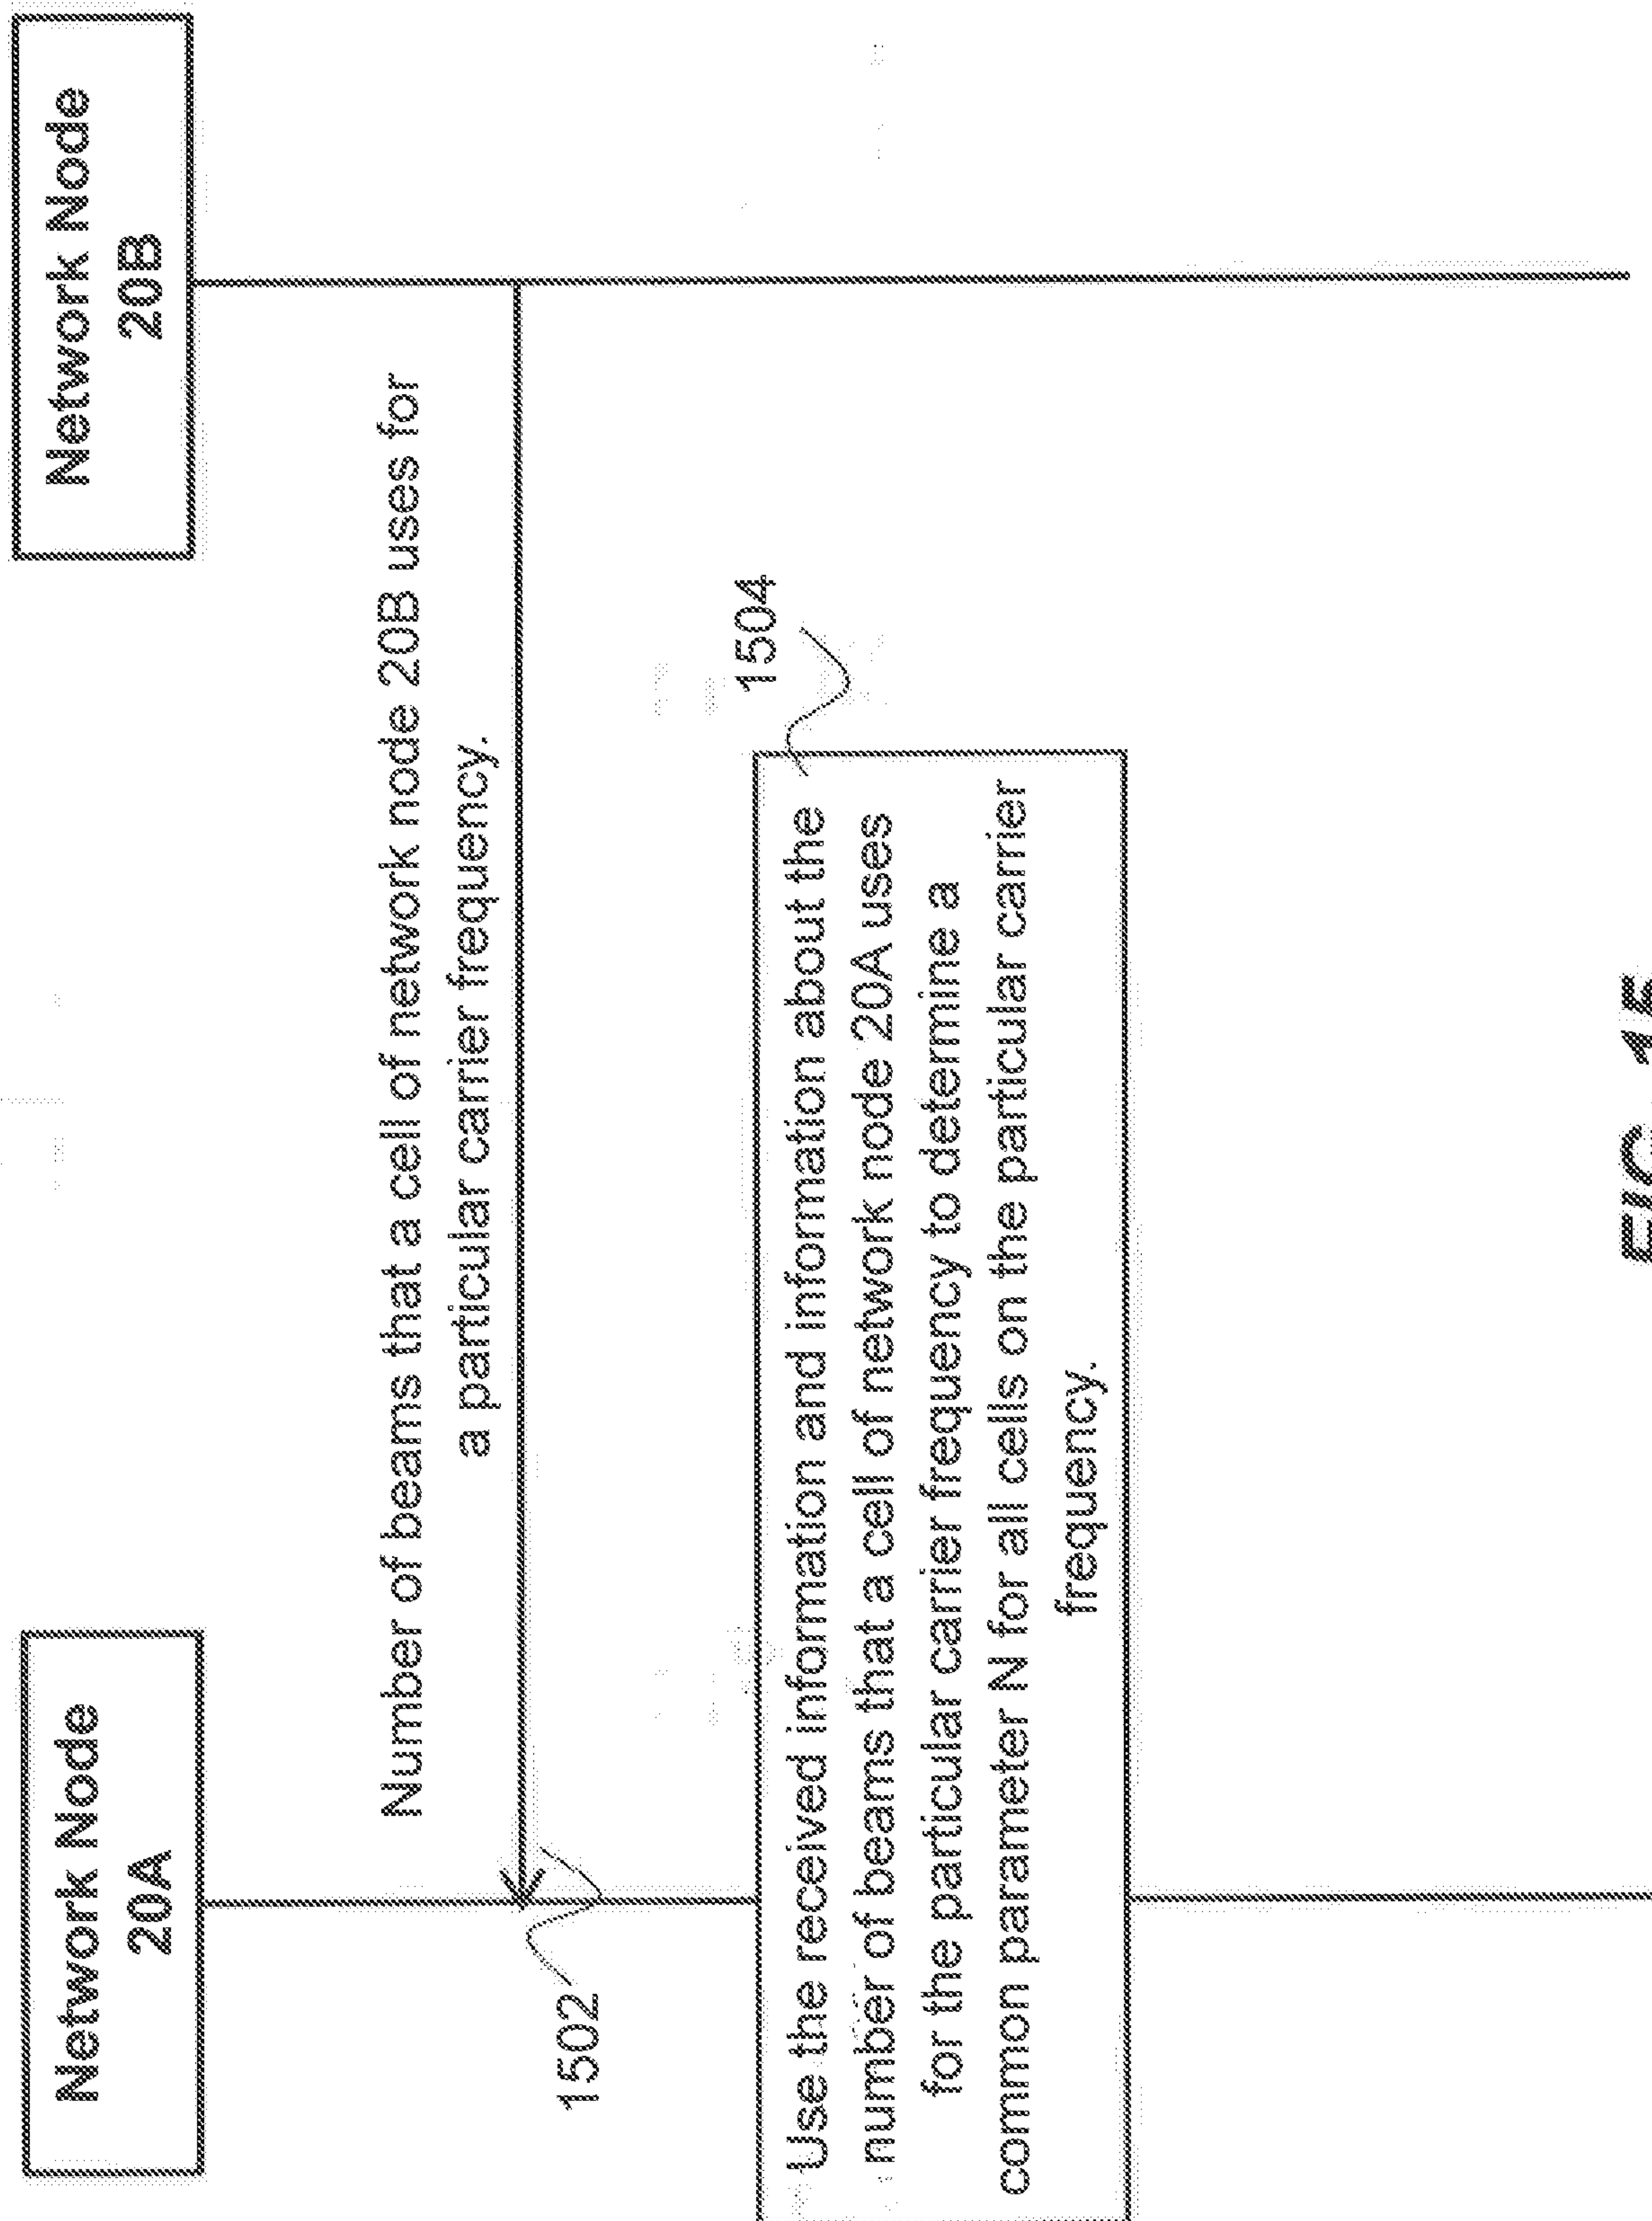
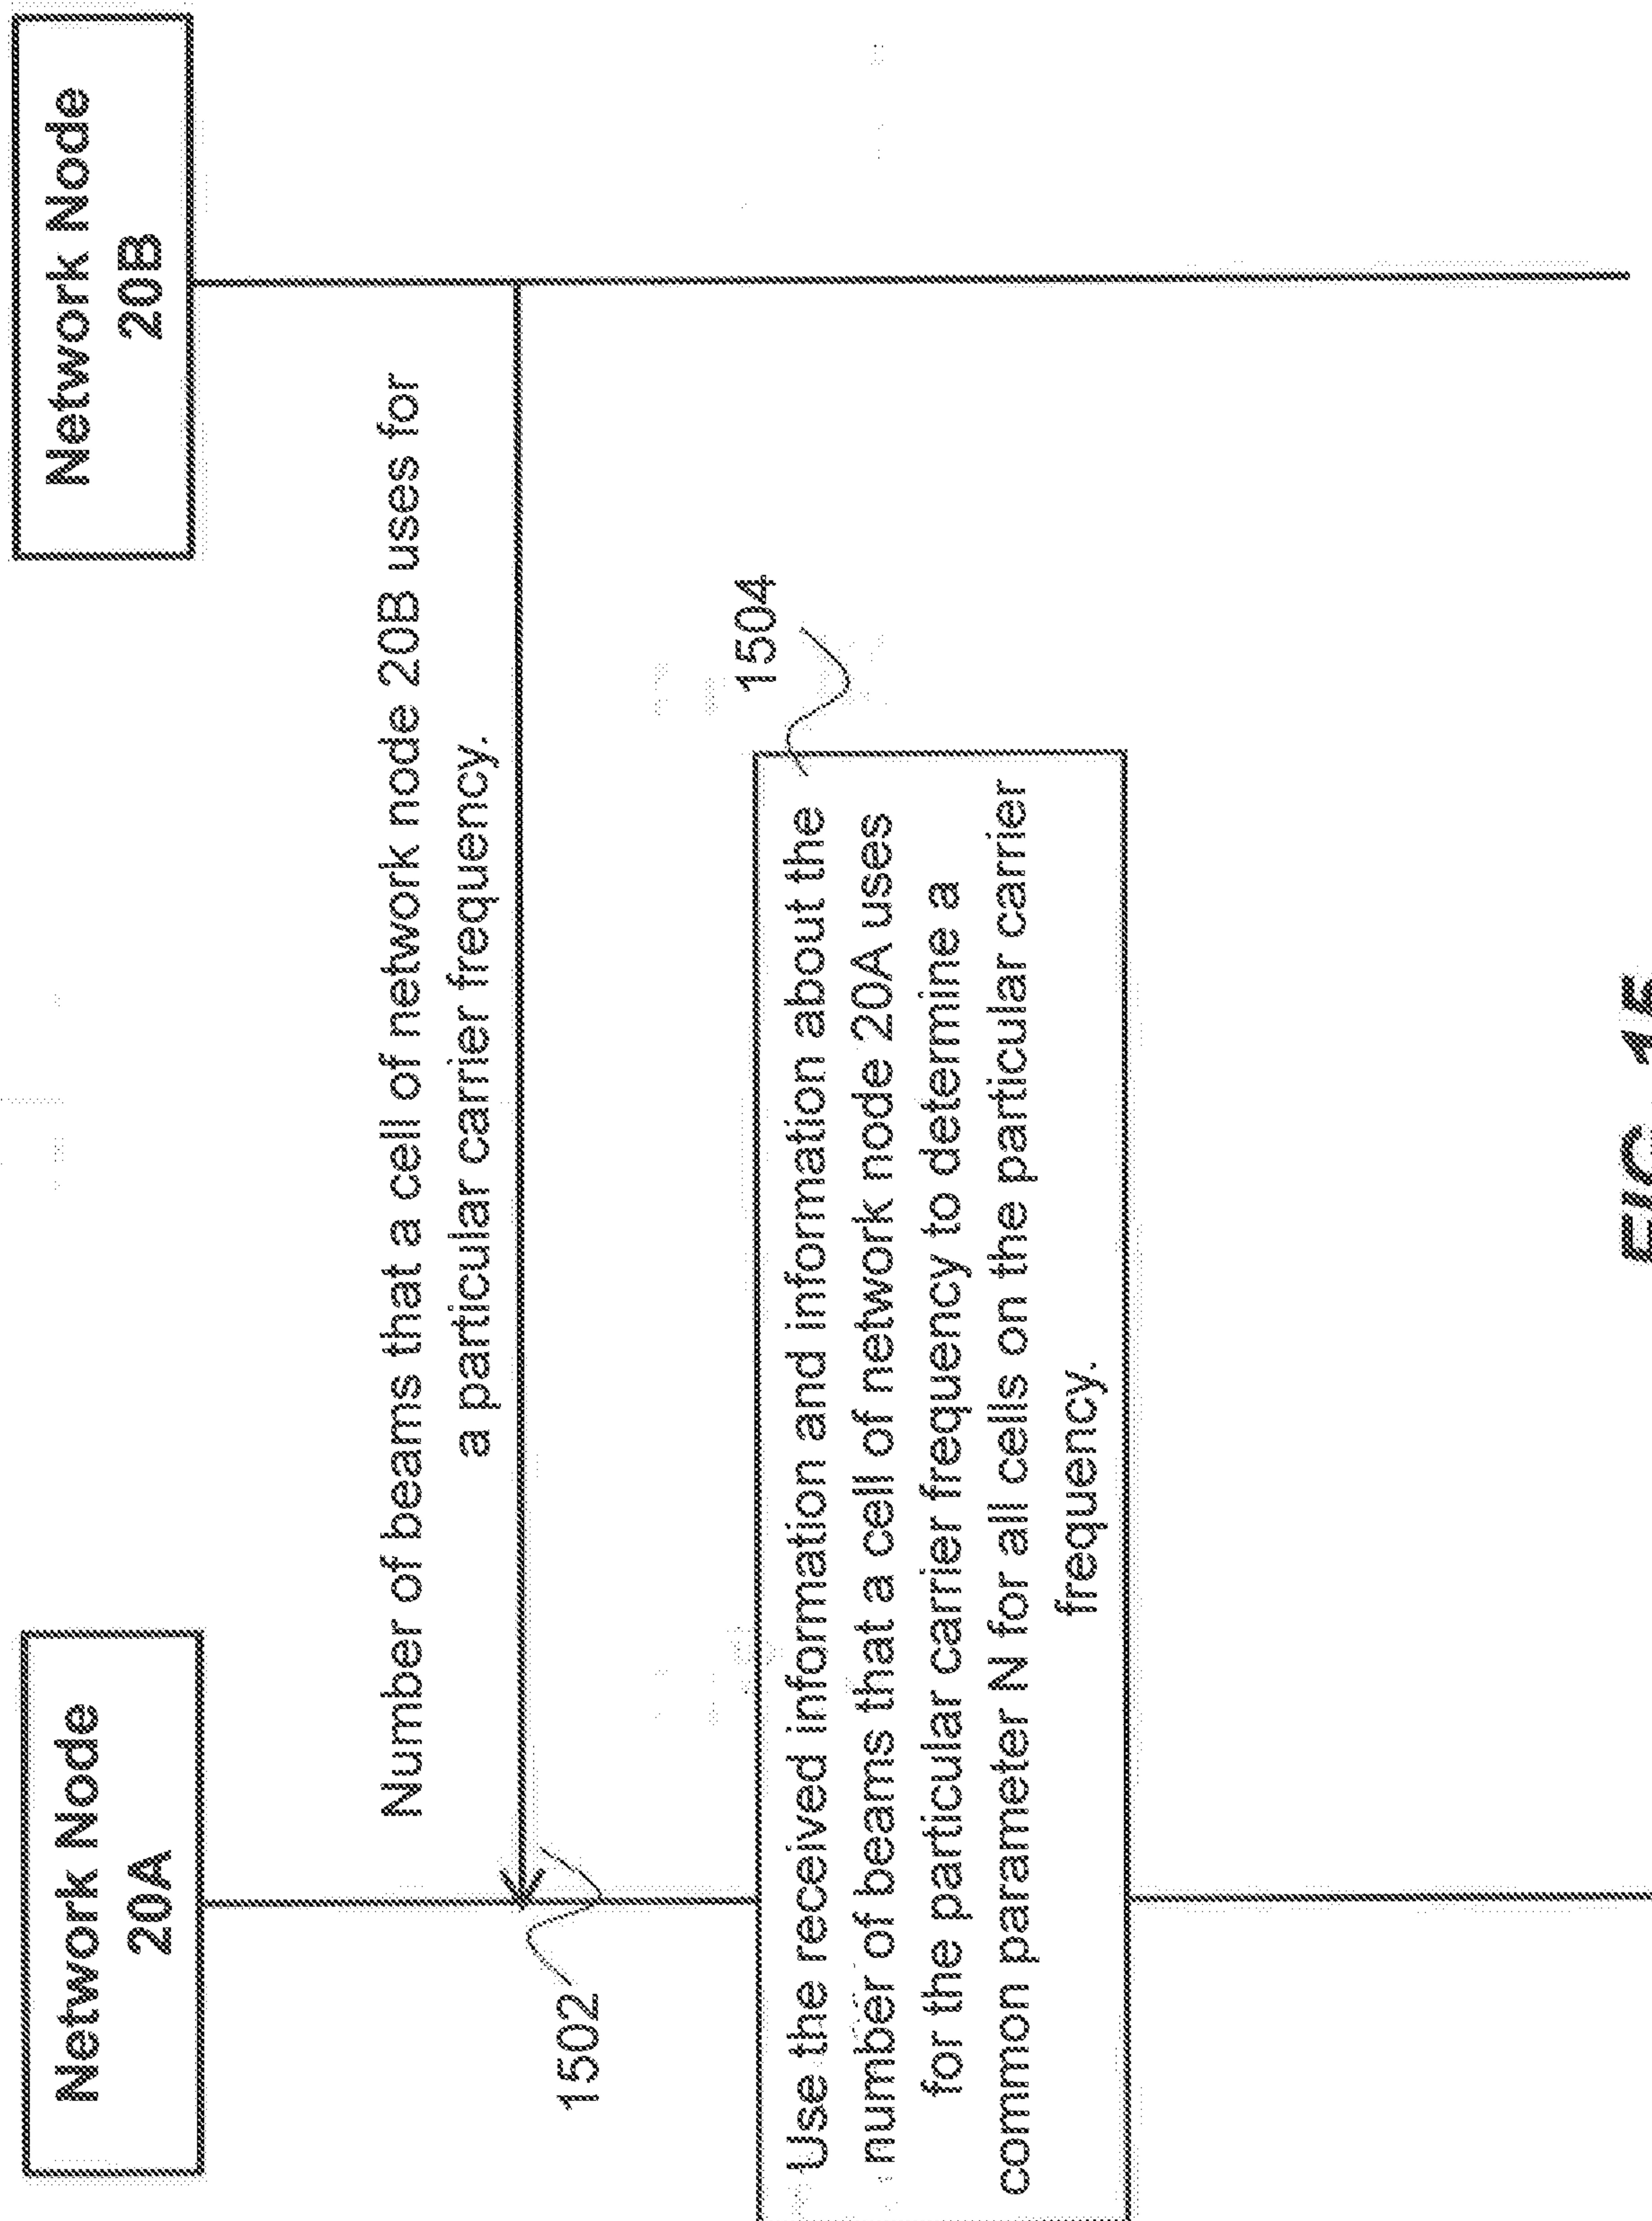


FIG. 14B





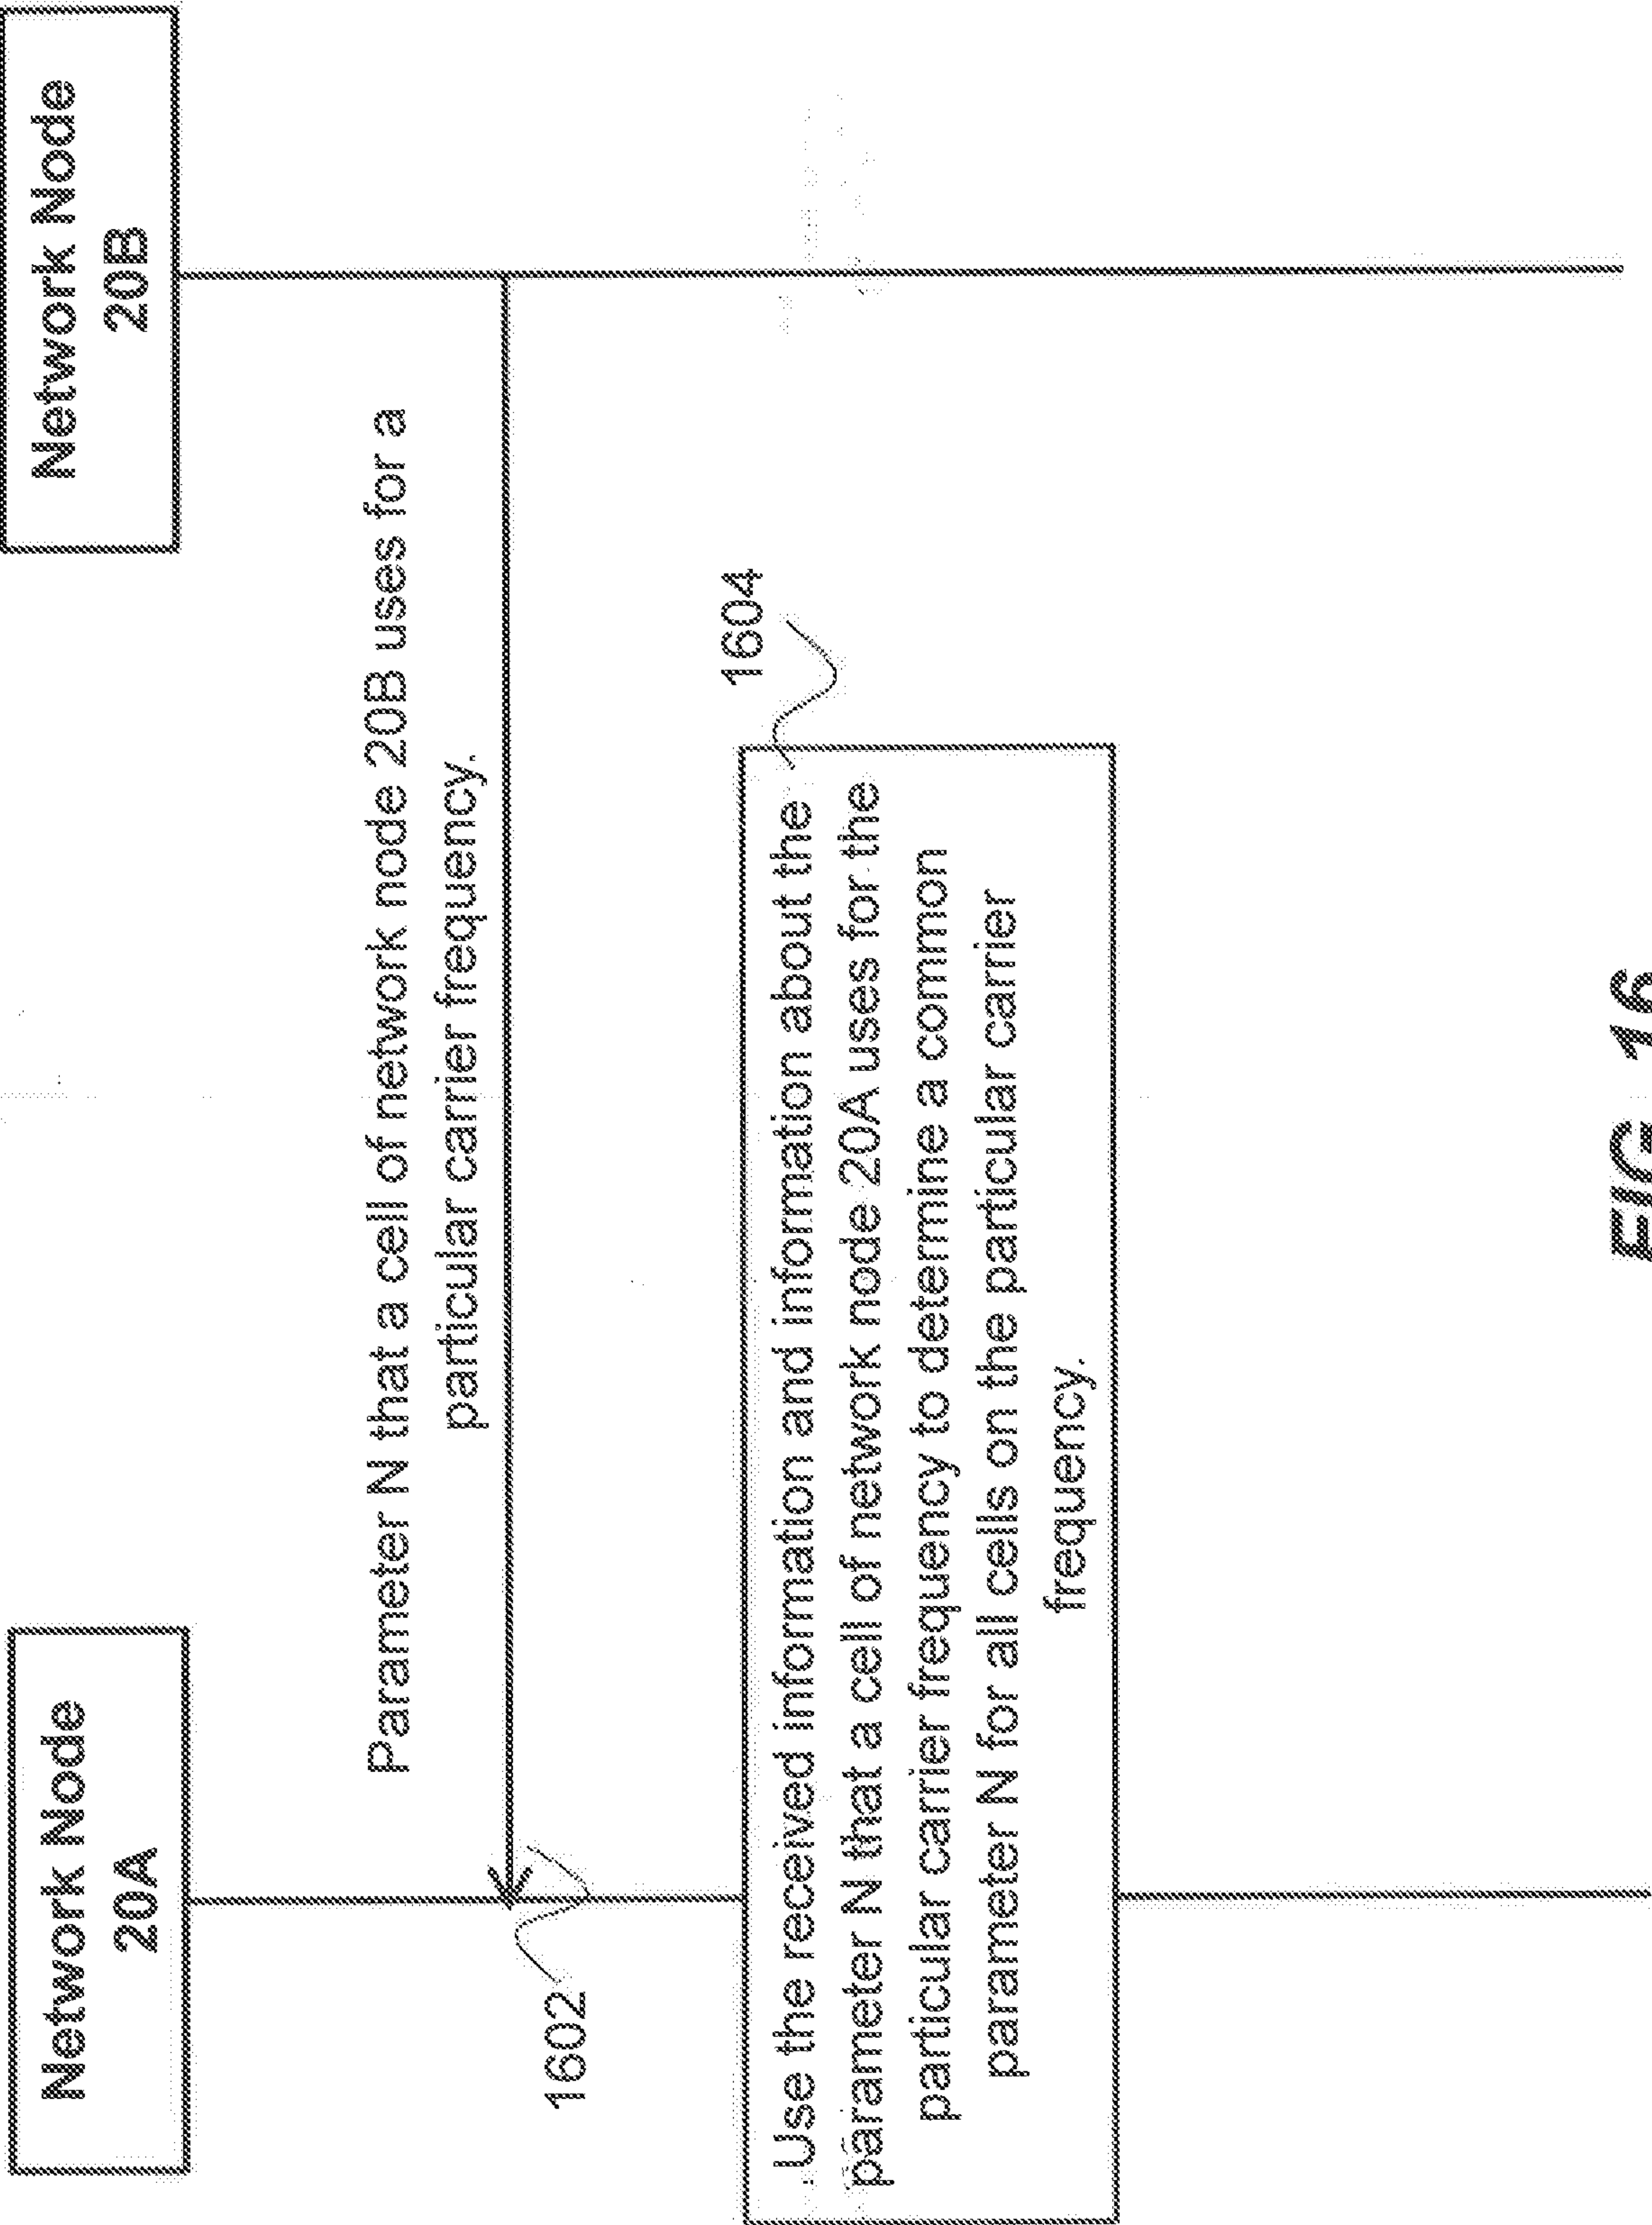


FIG. 16

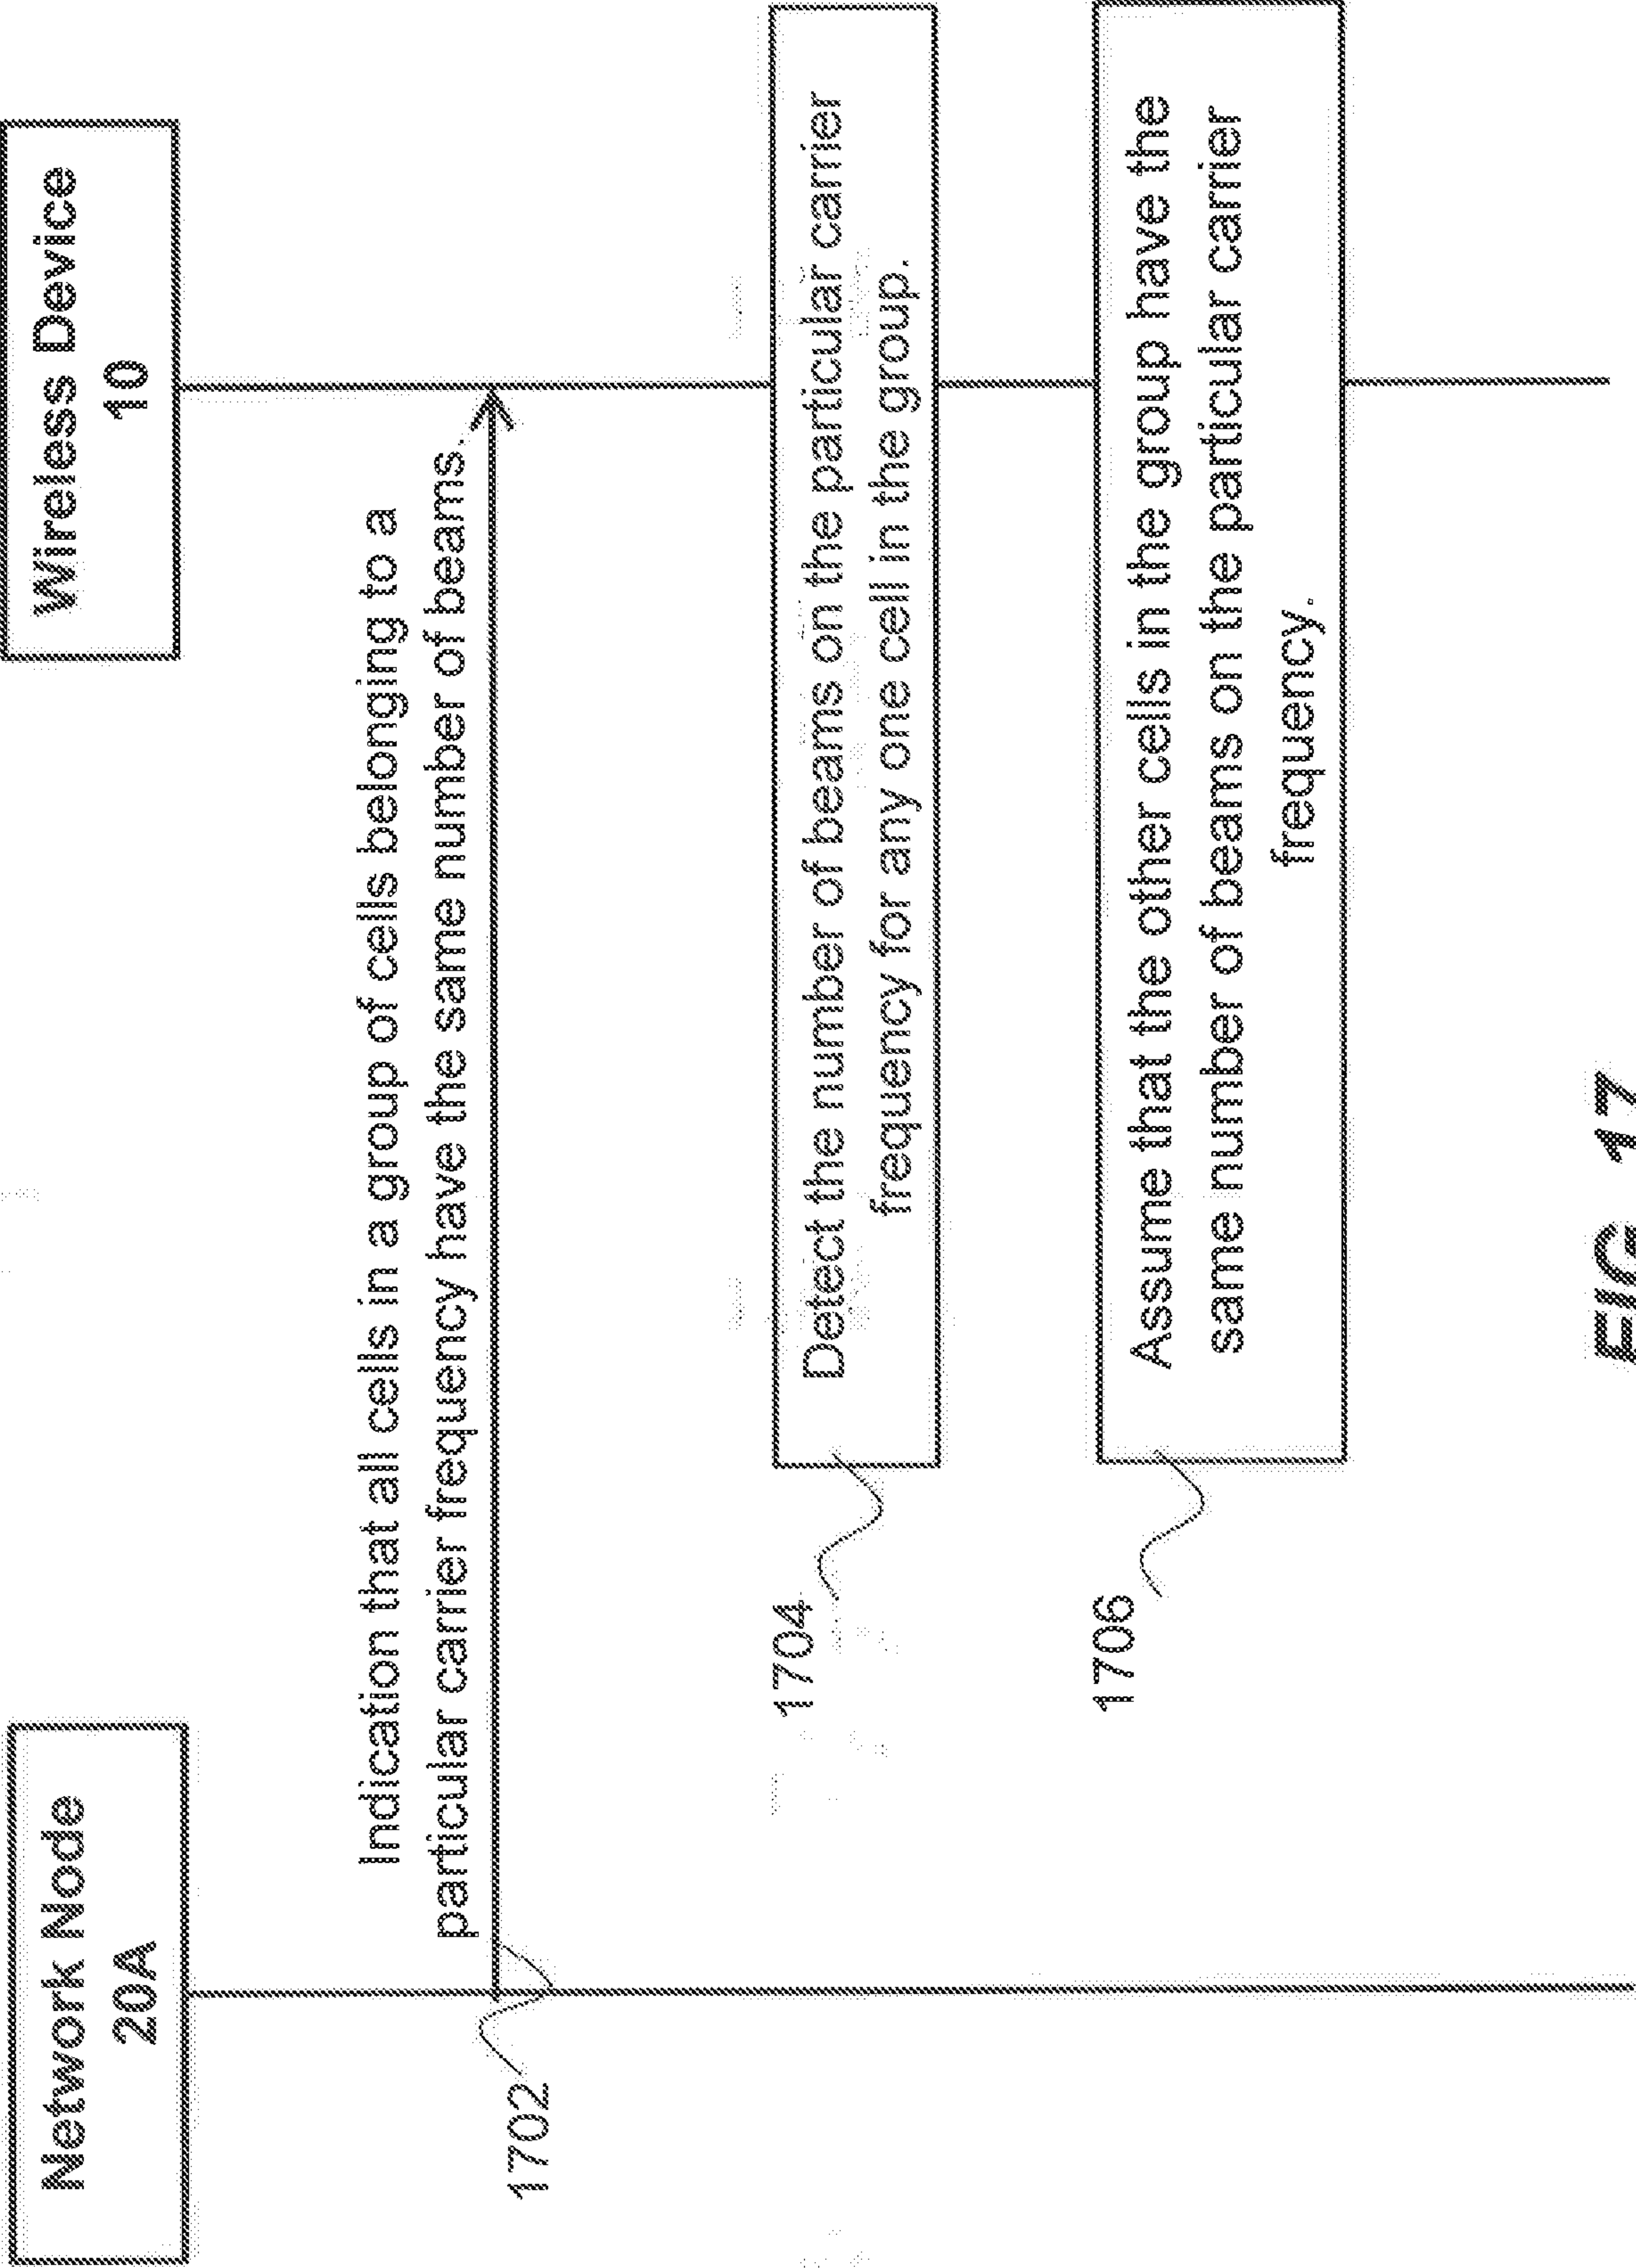


FIG. 17

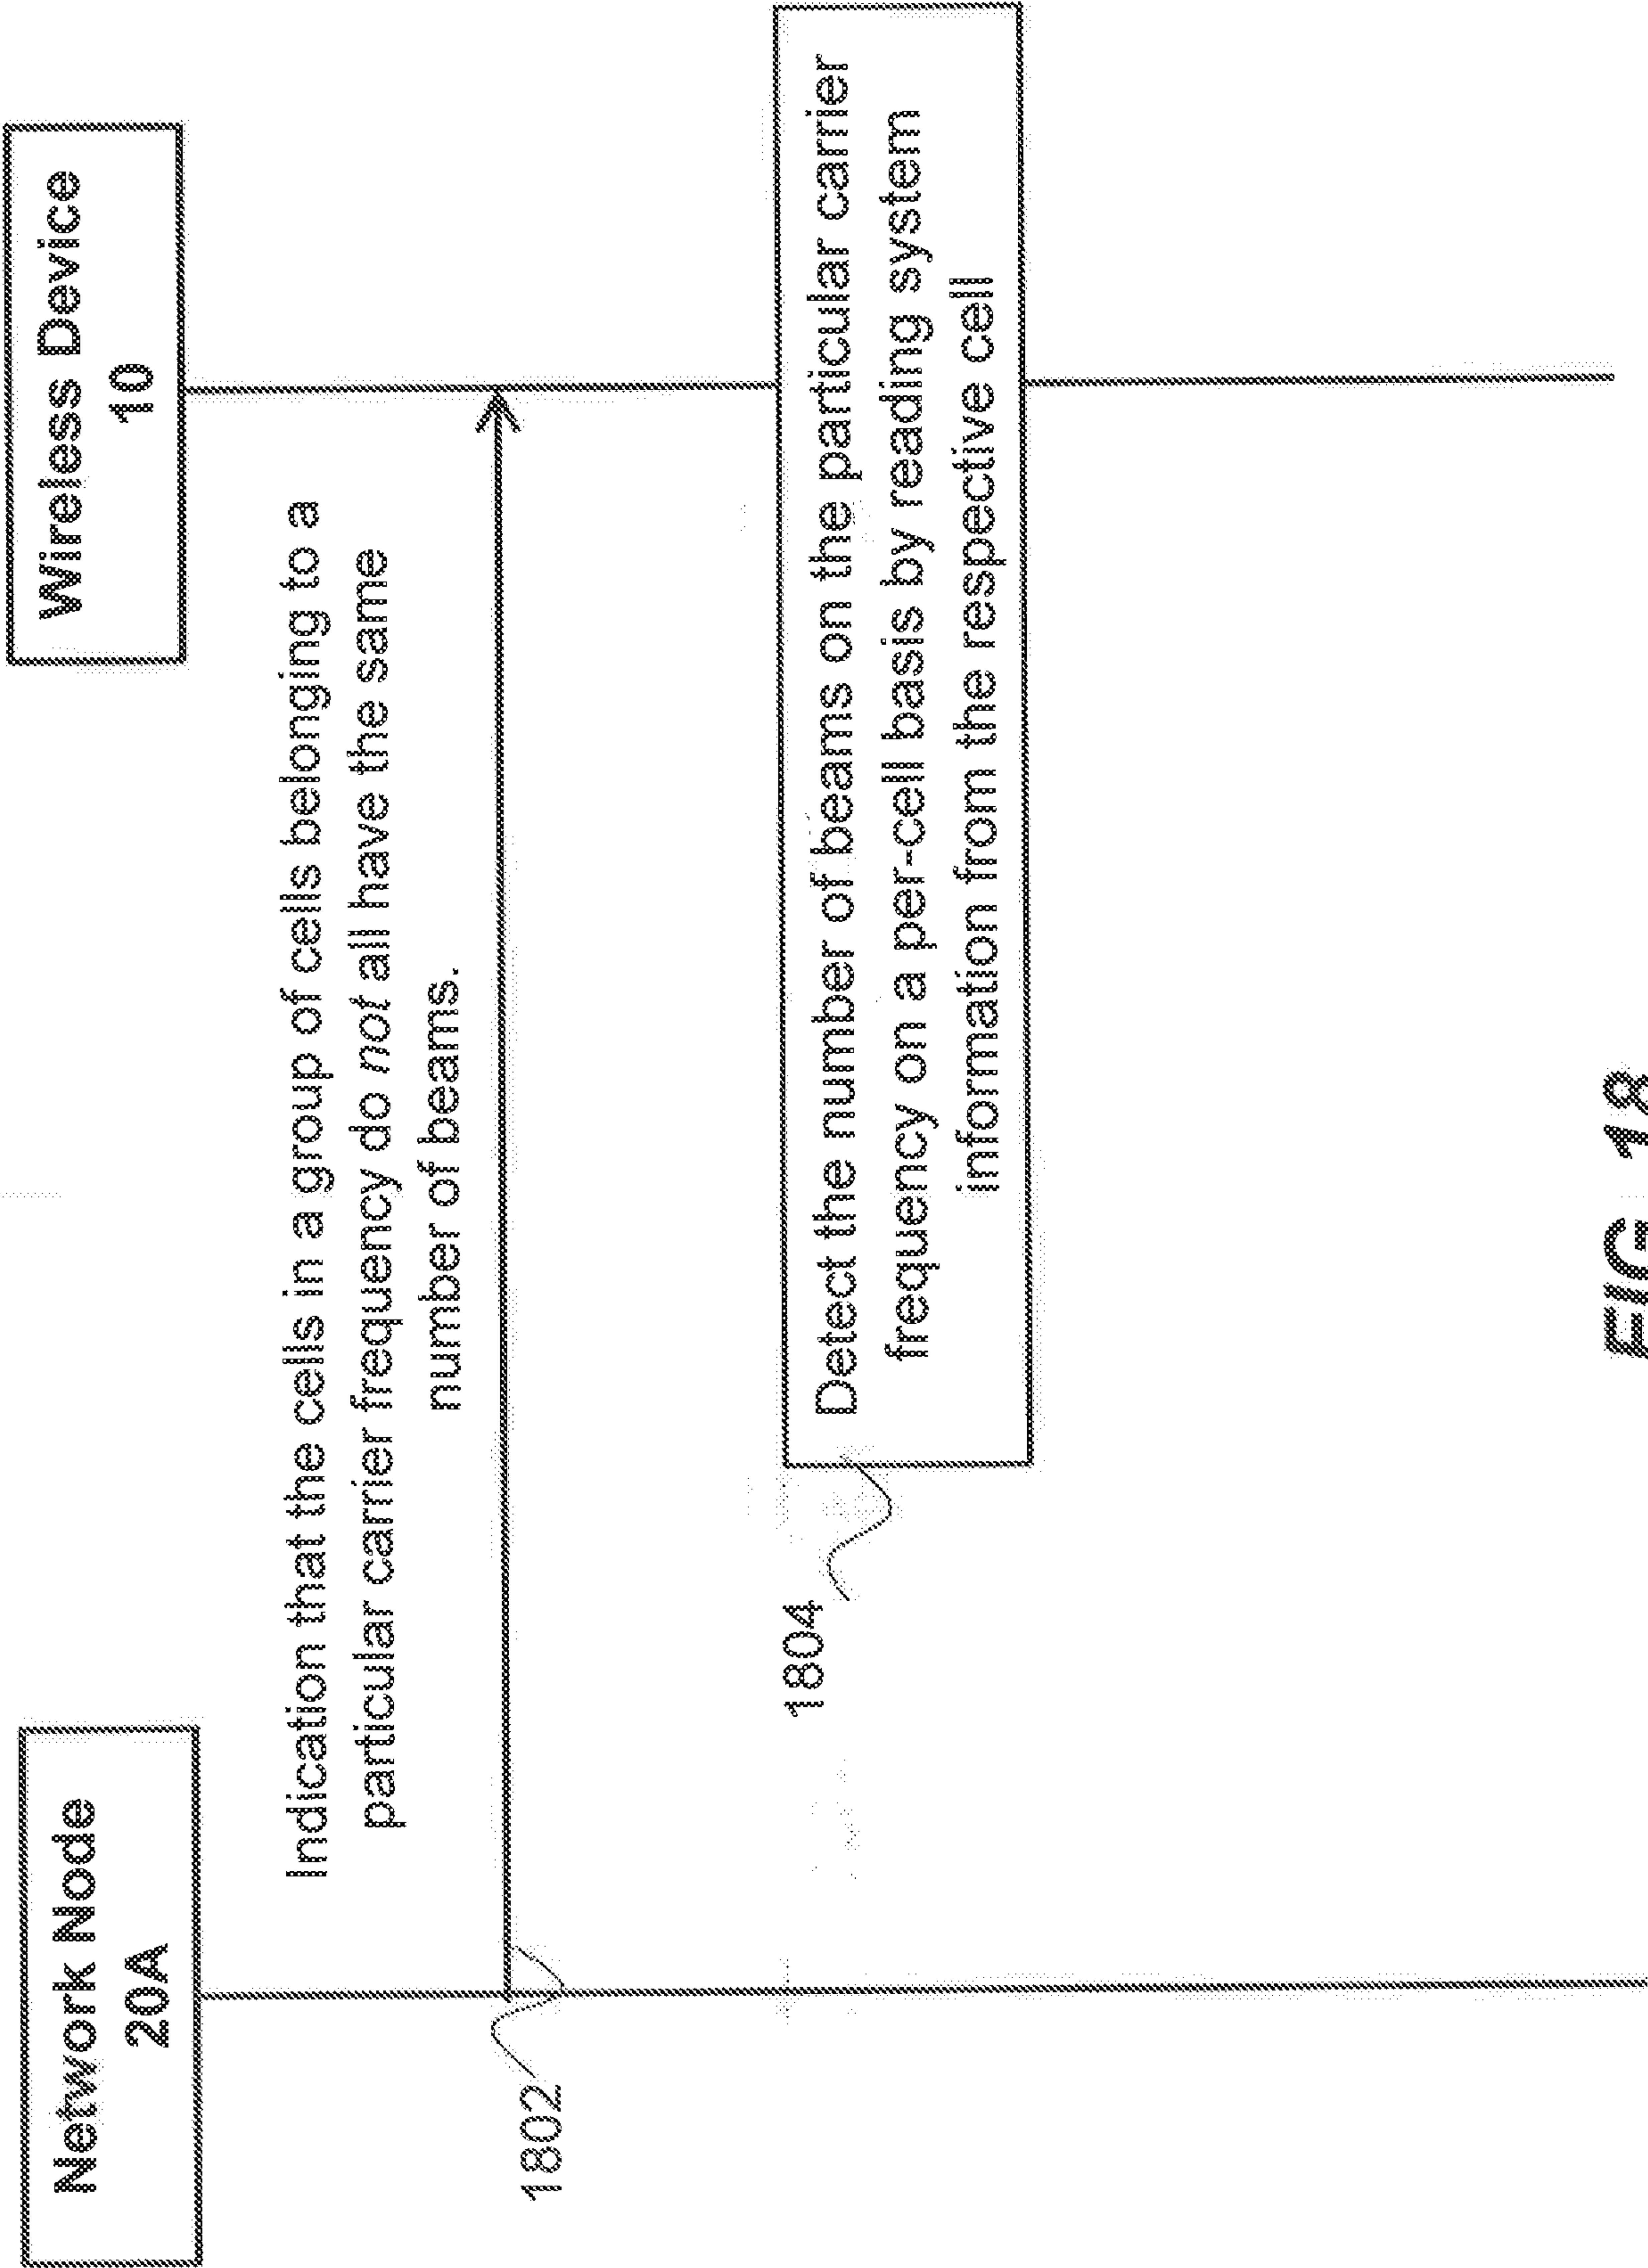


FIG. 18

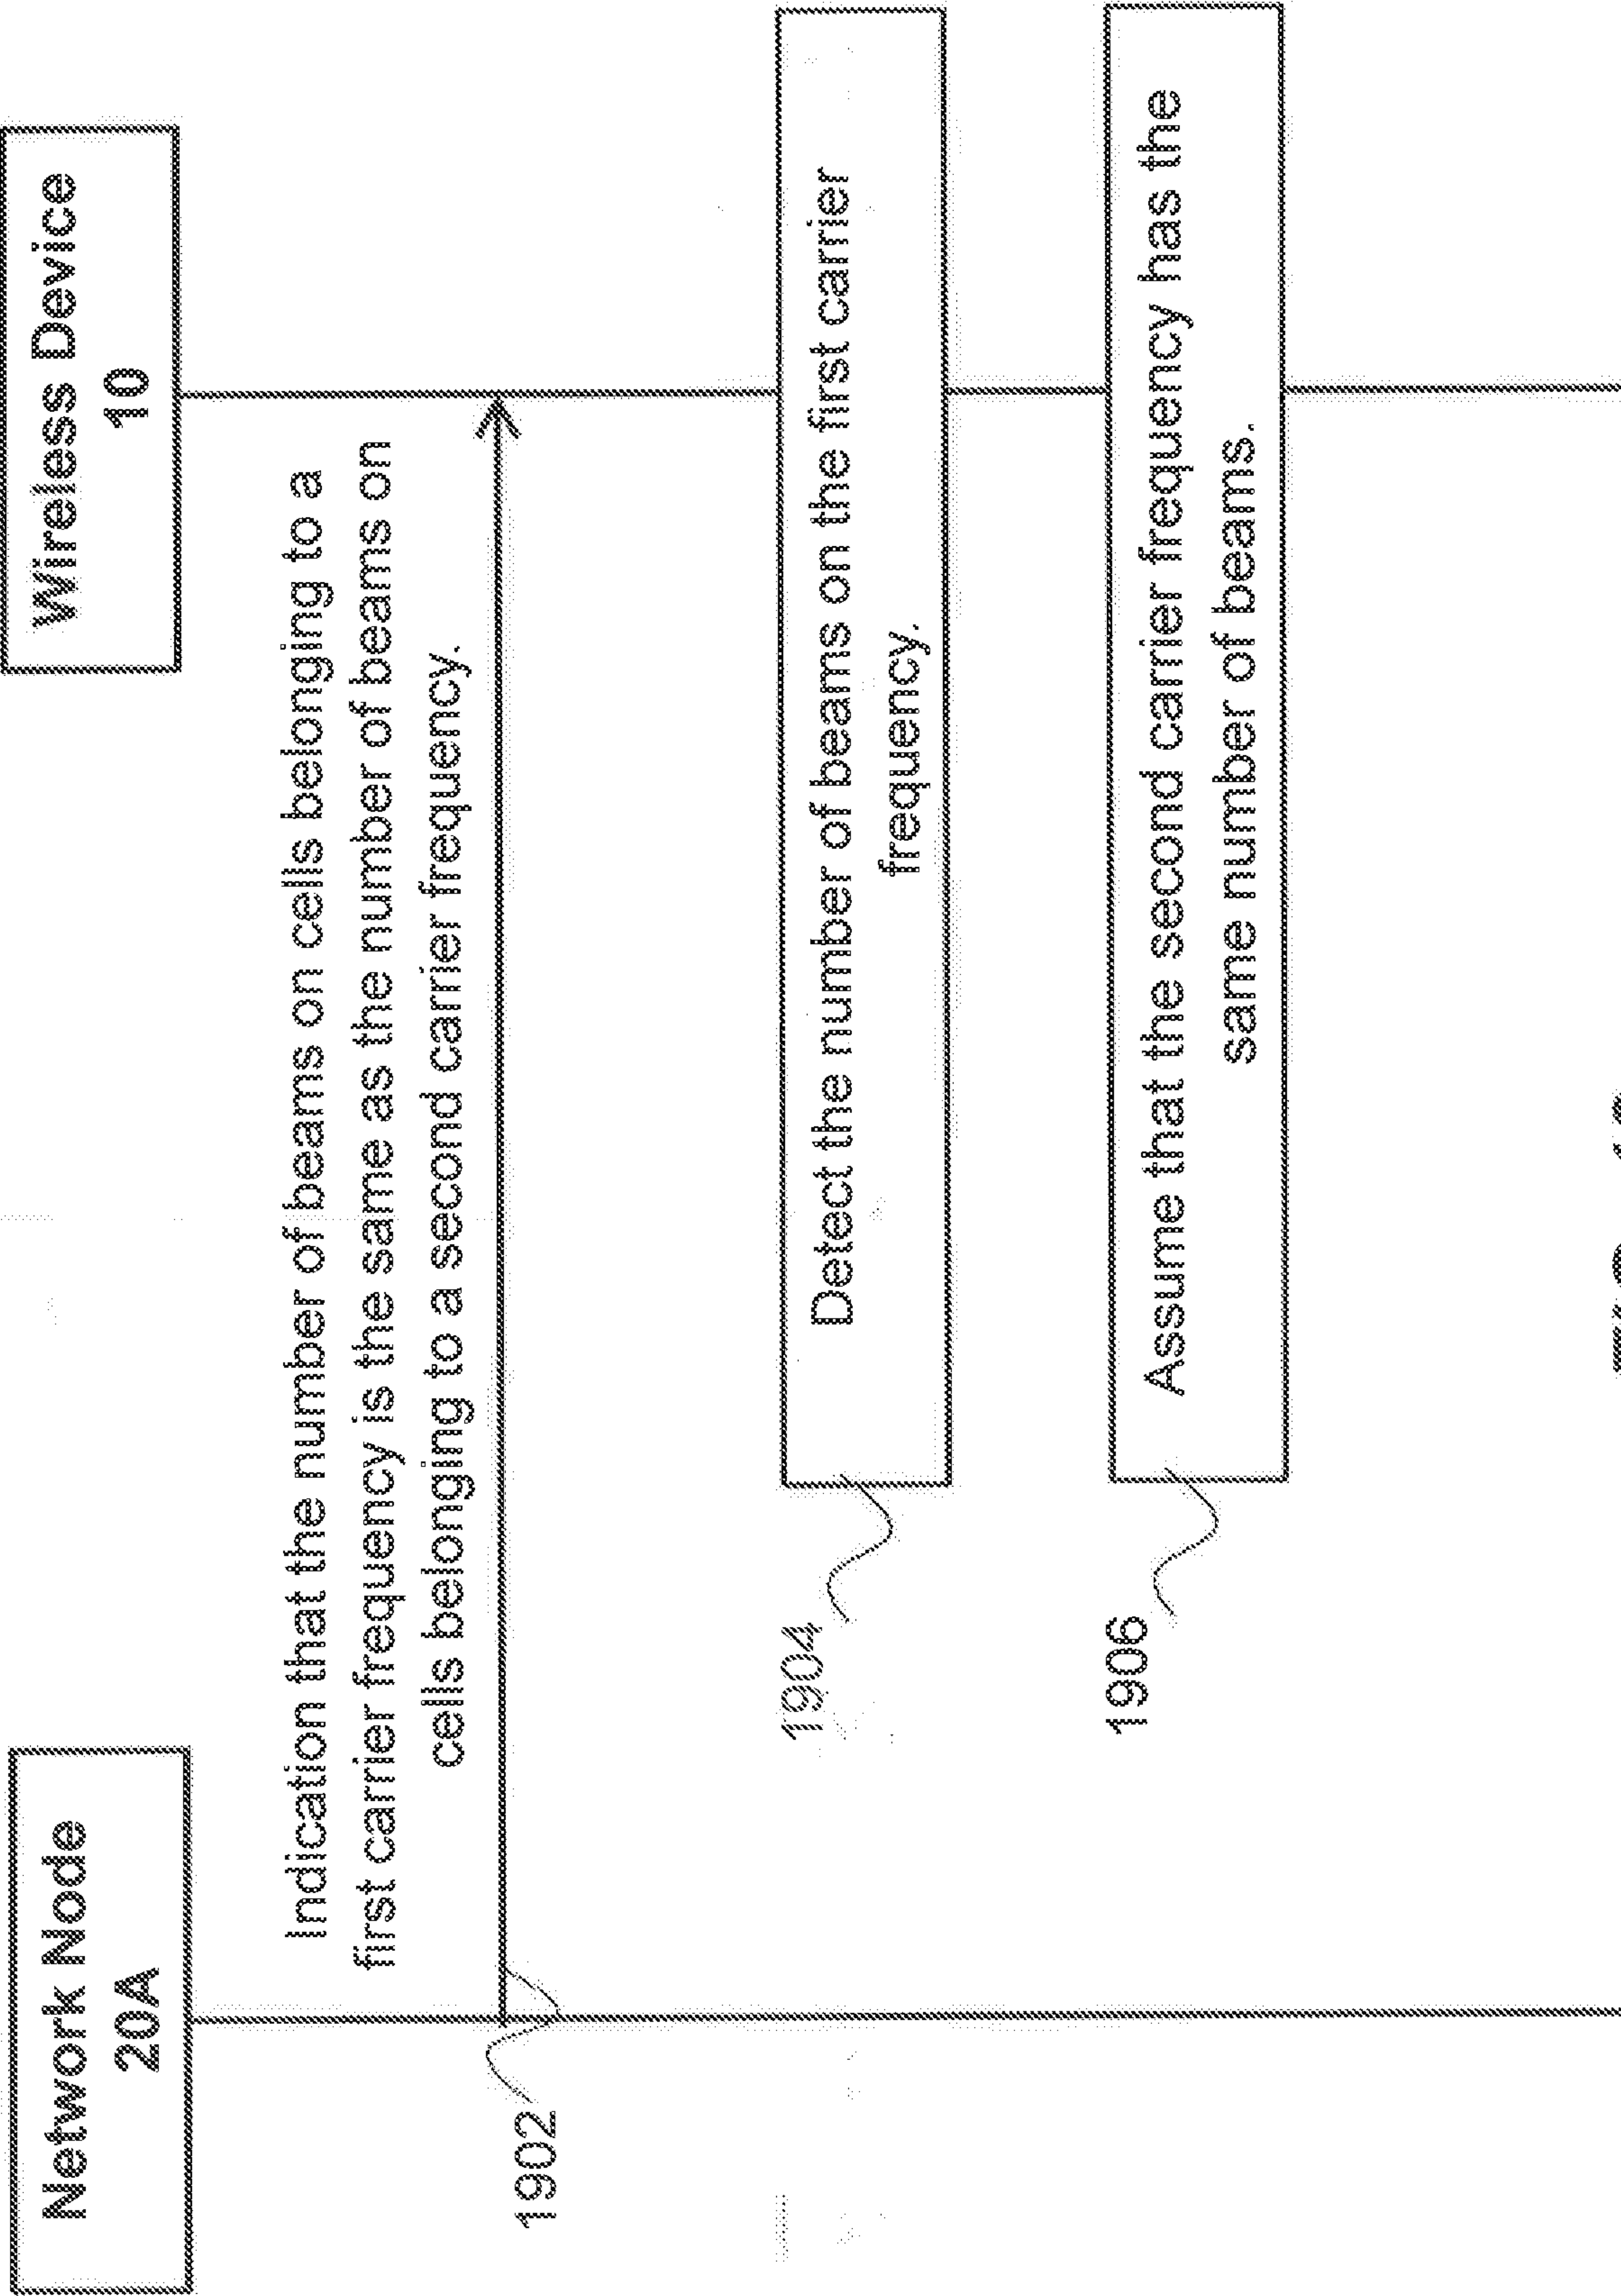


FIG. 19

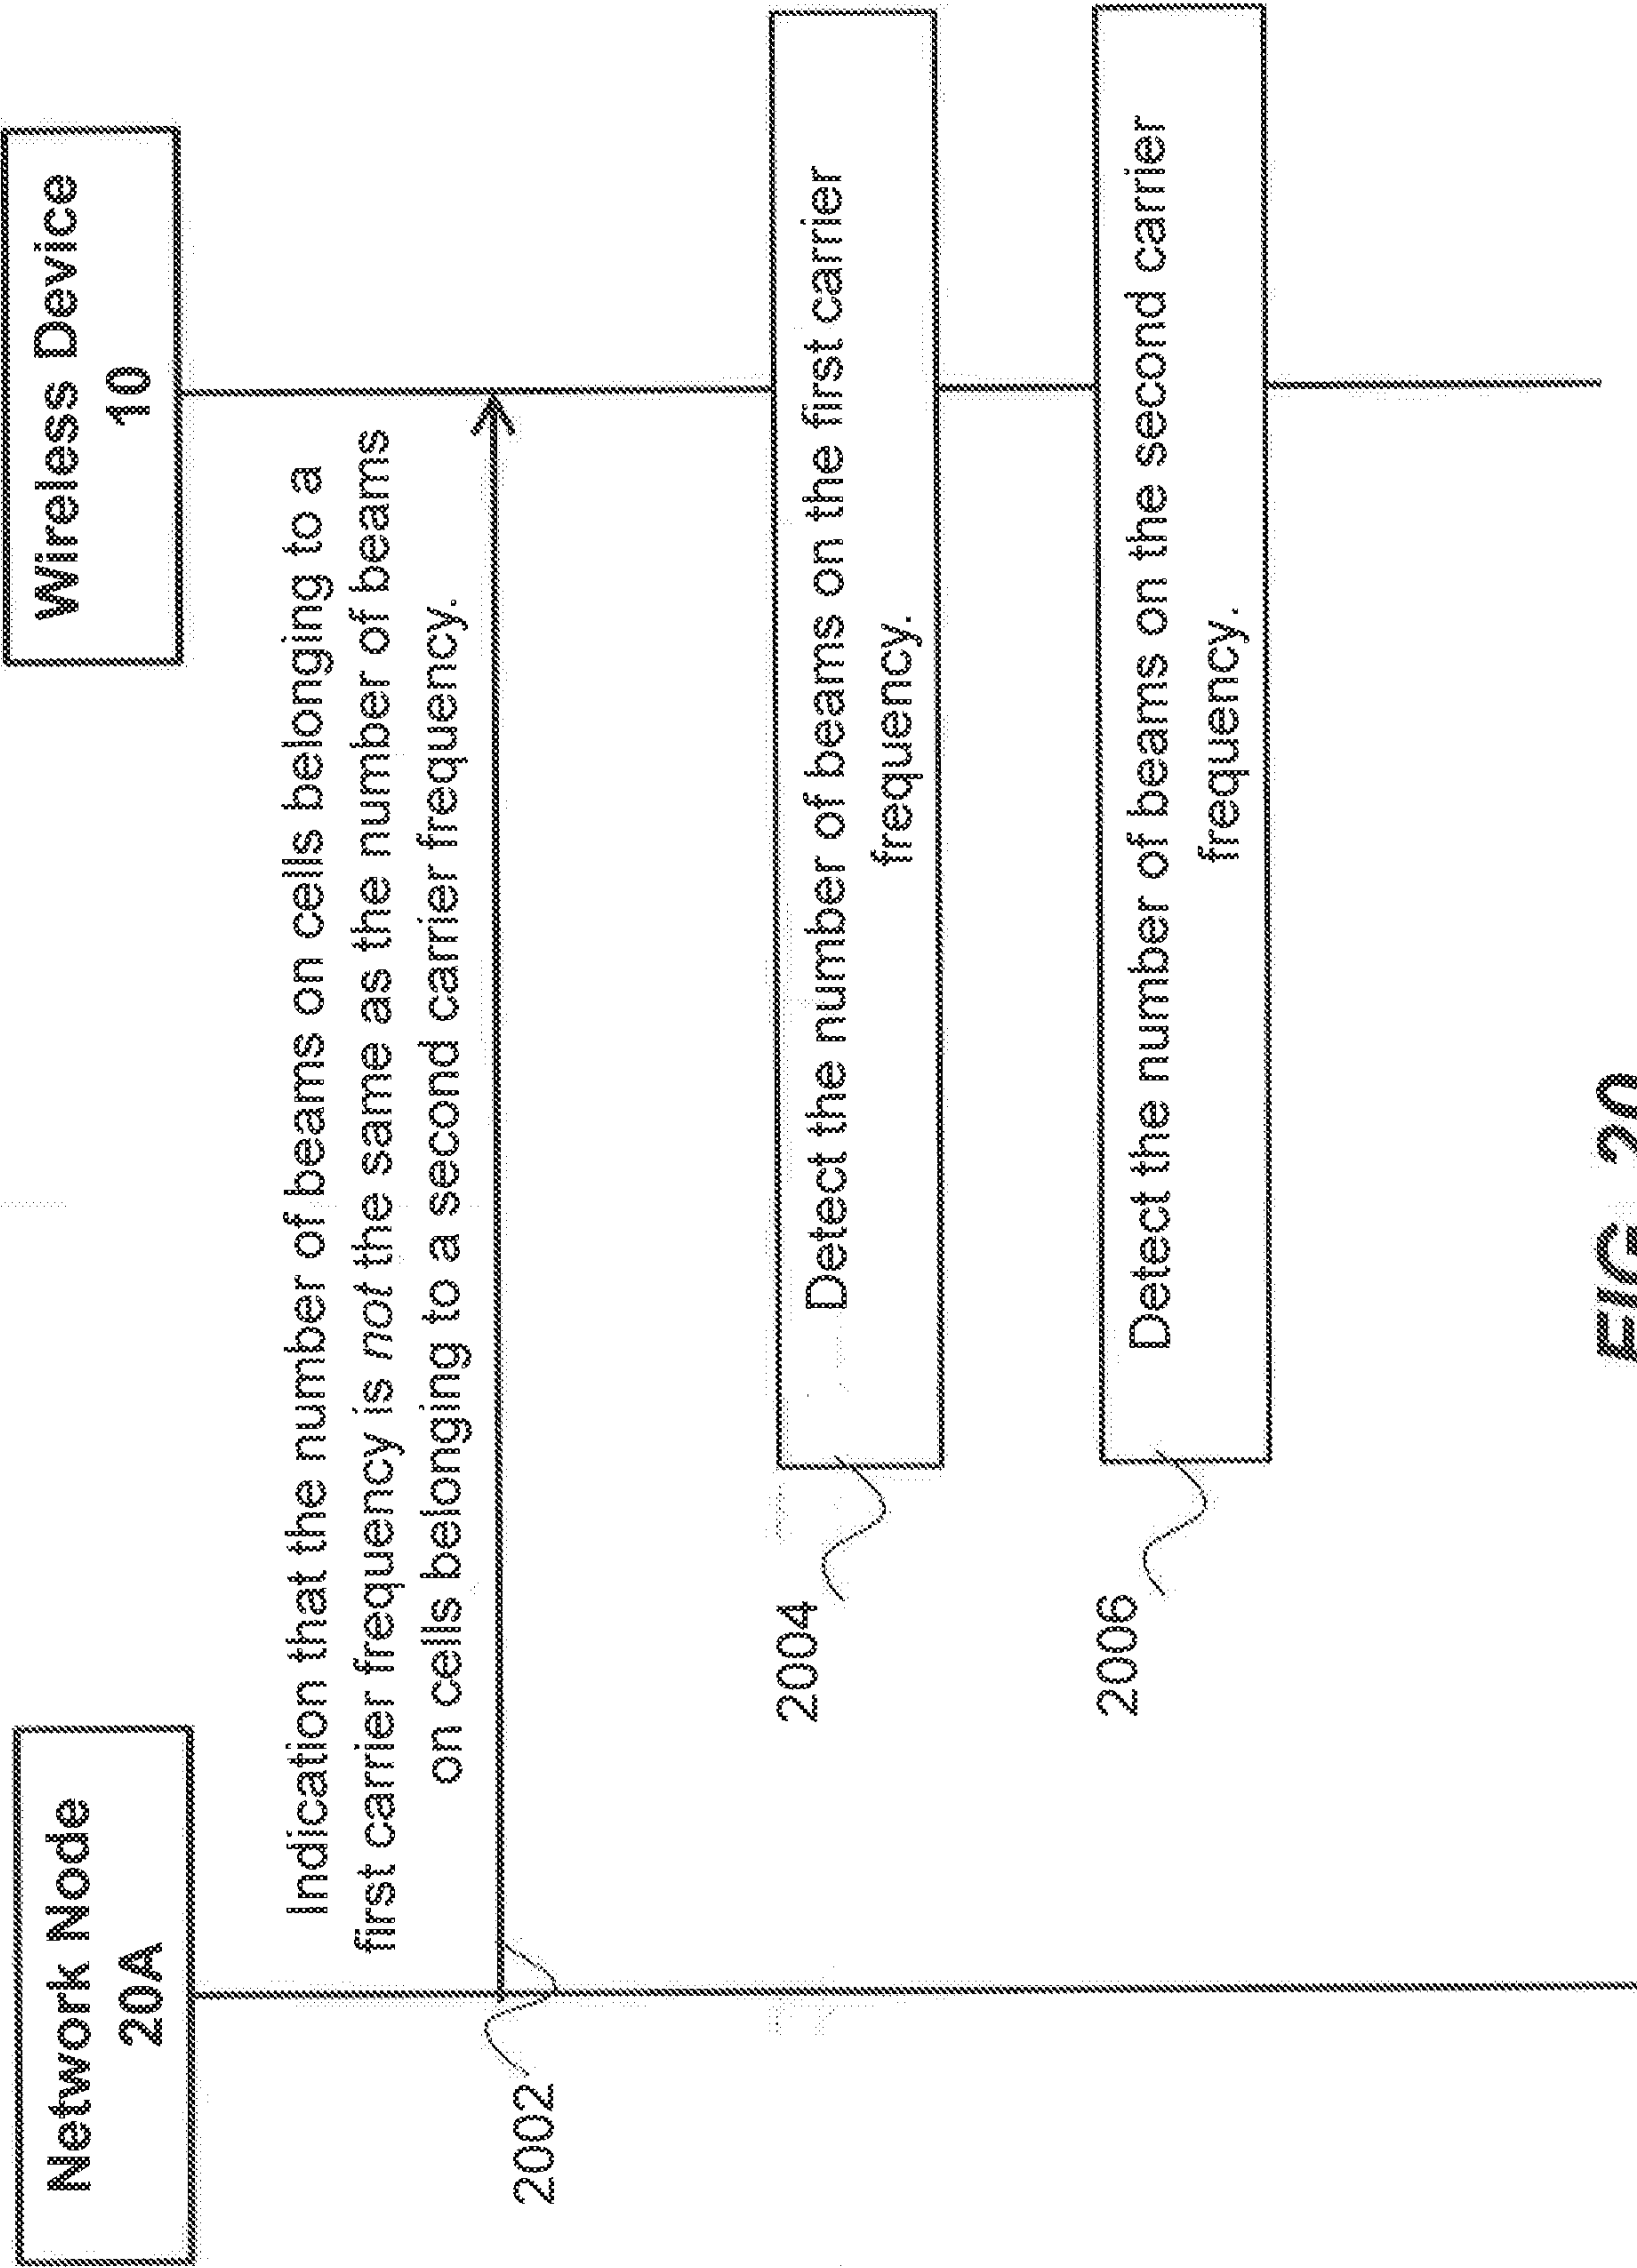


FIG. 20

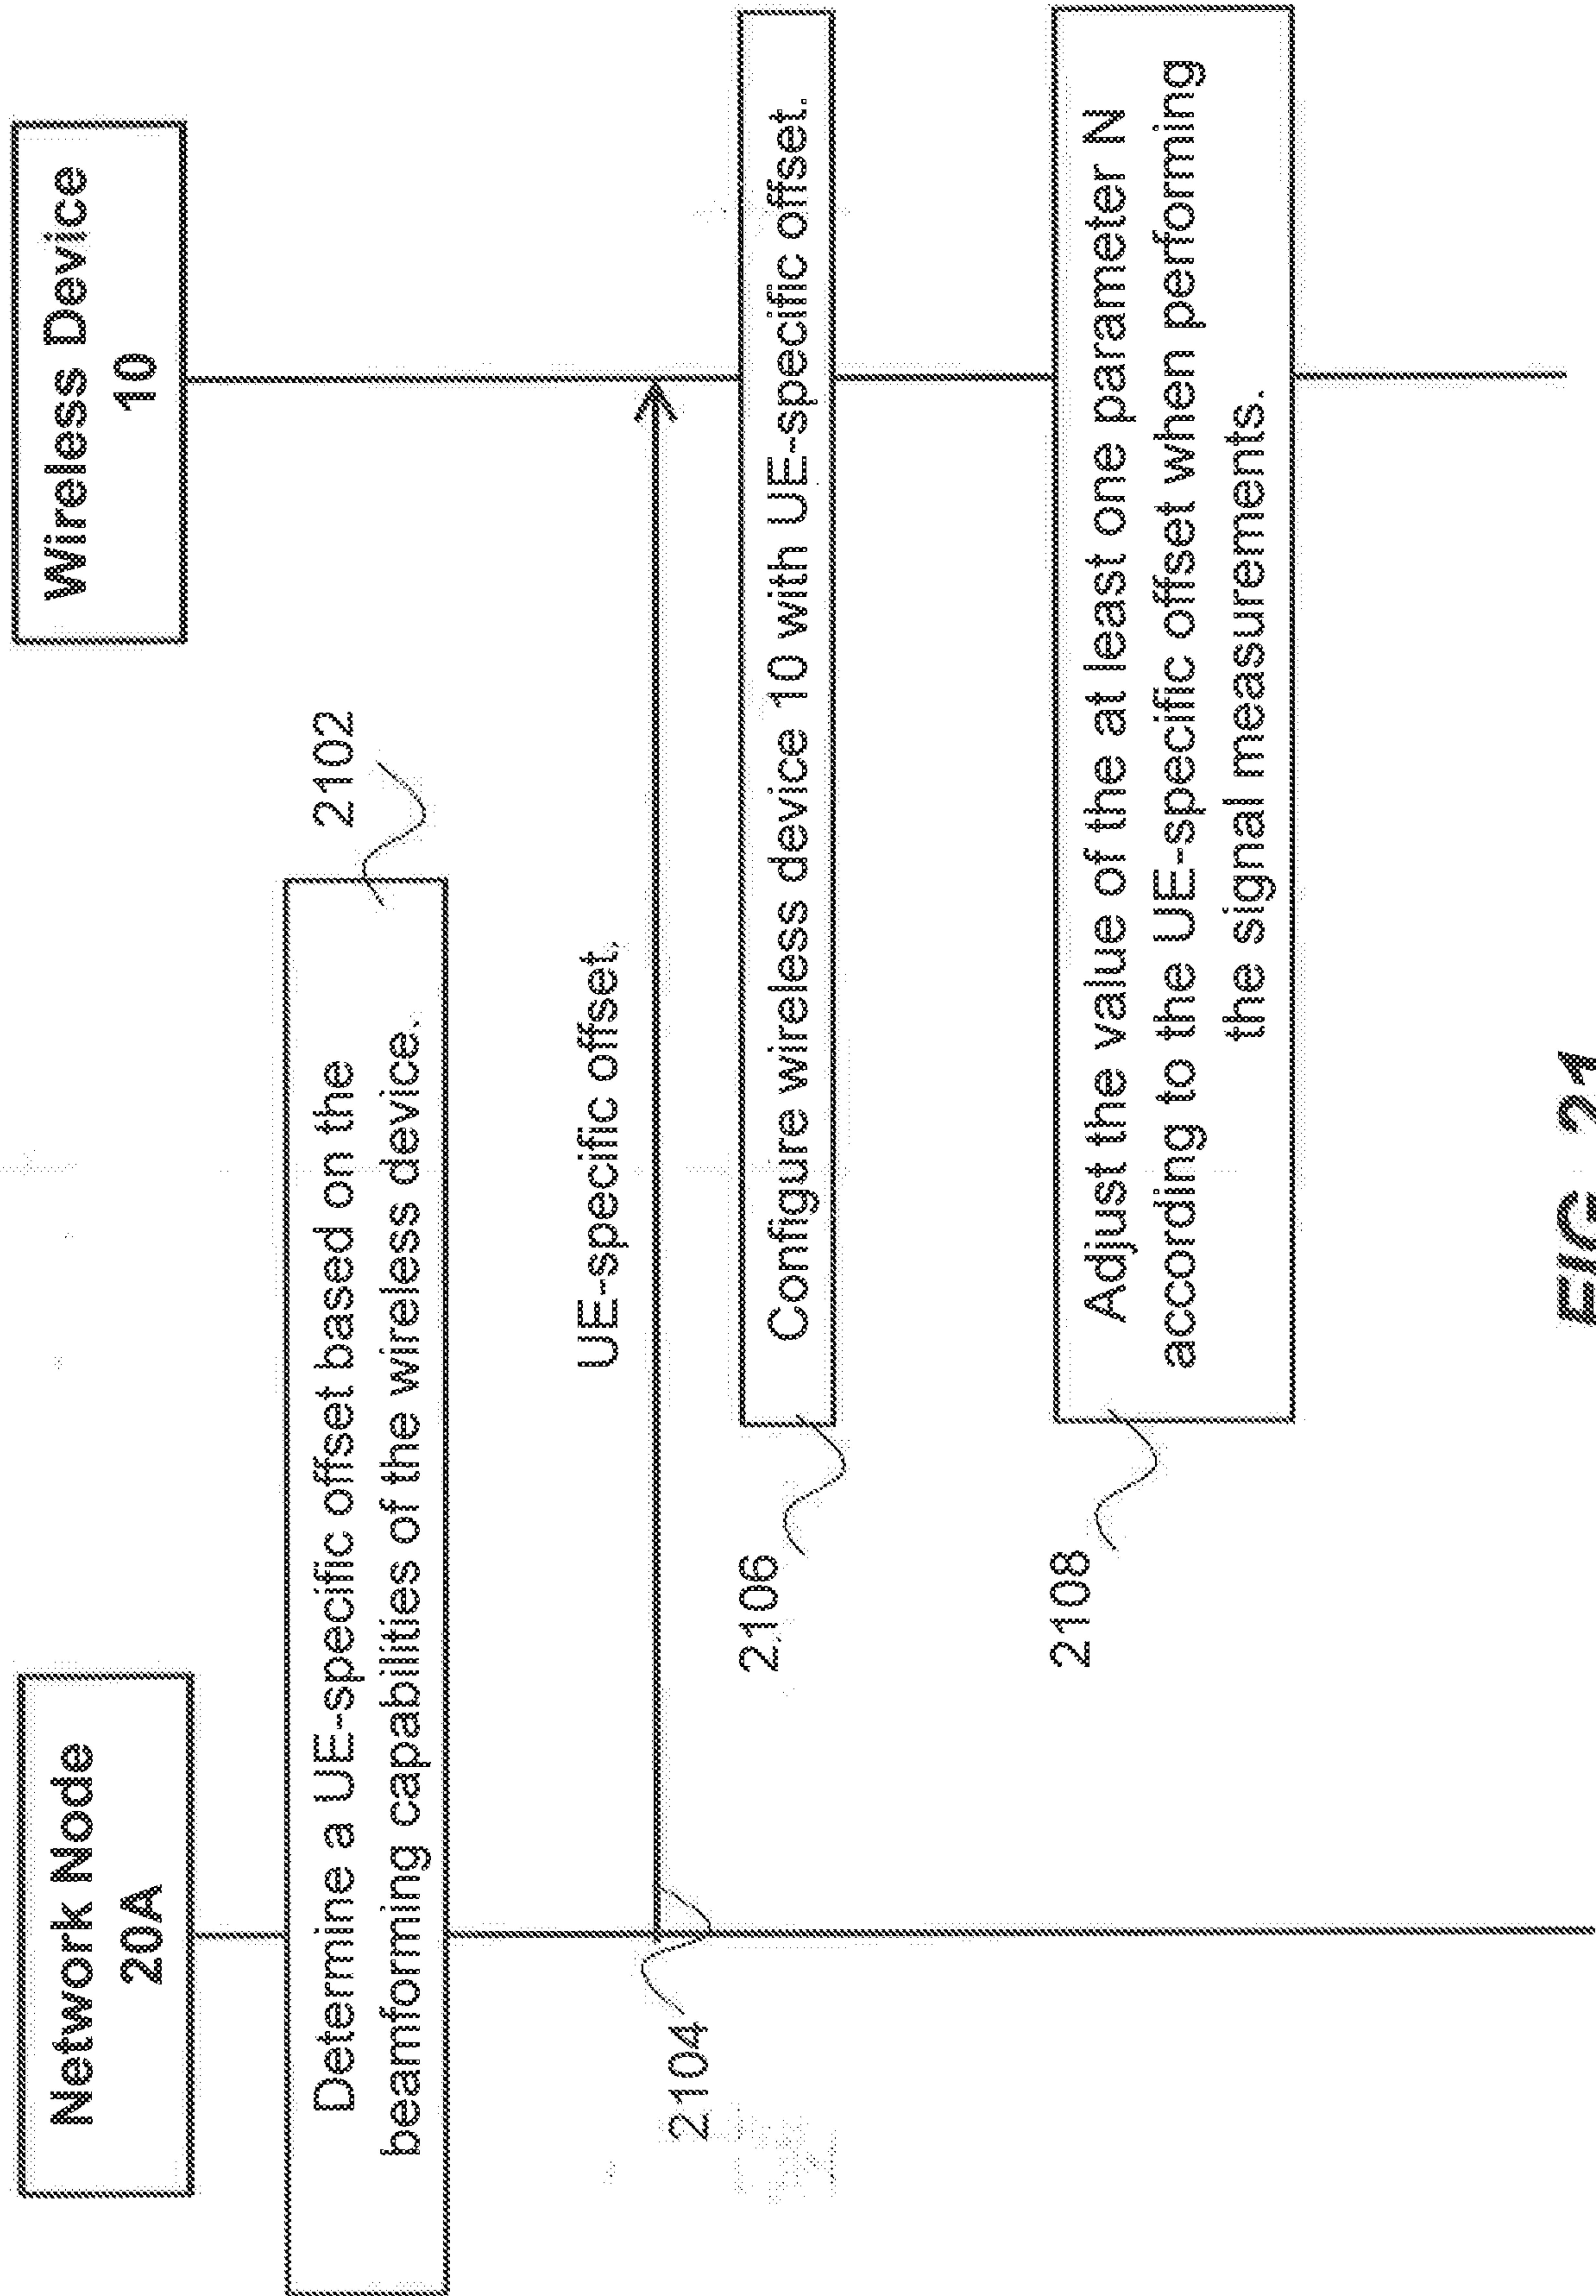


FIG. 21

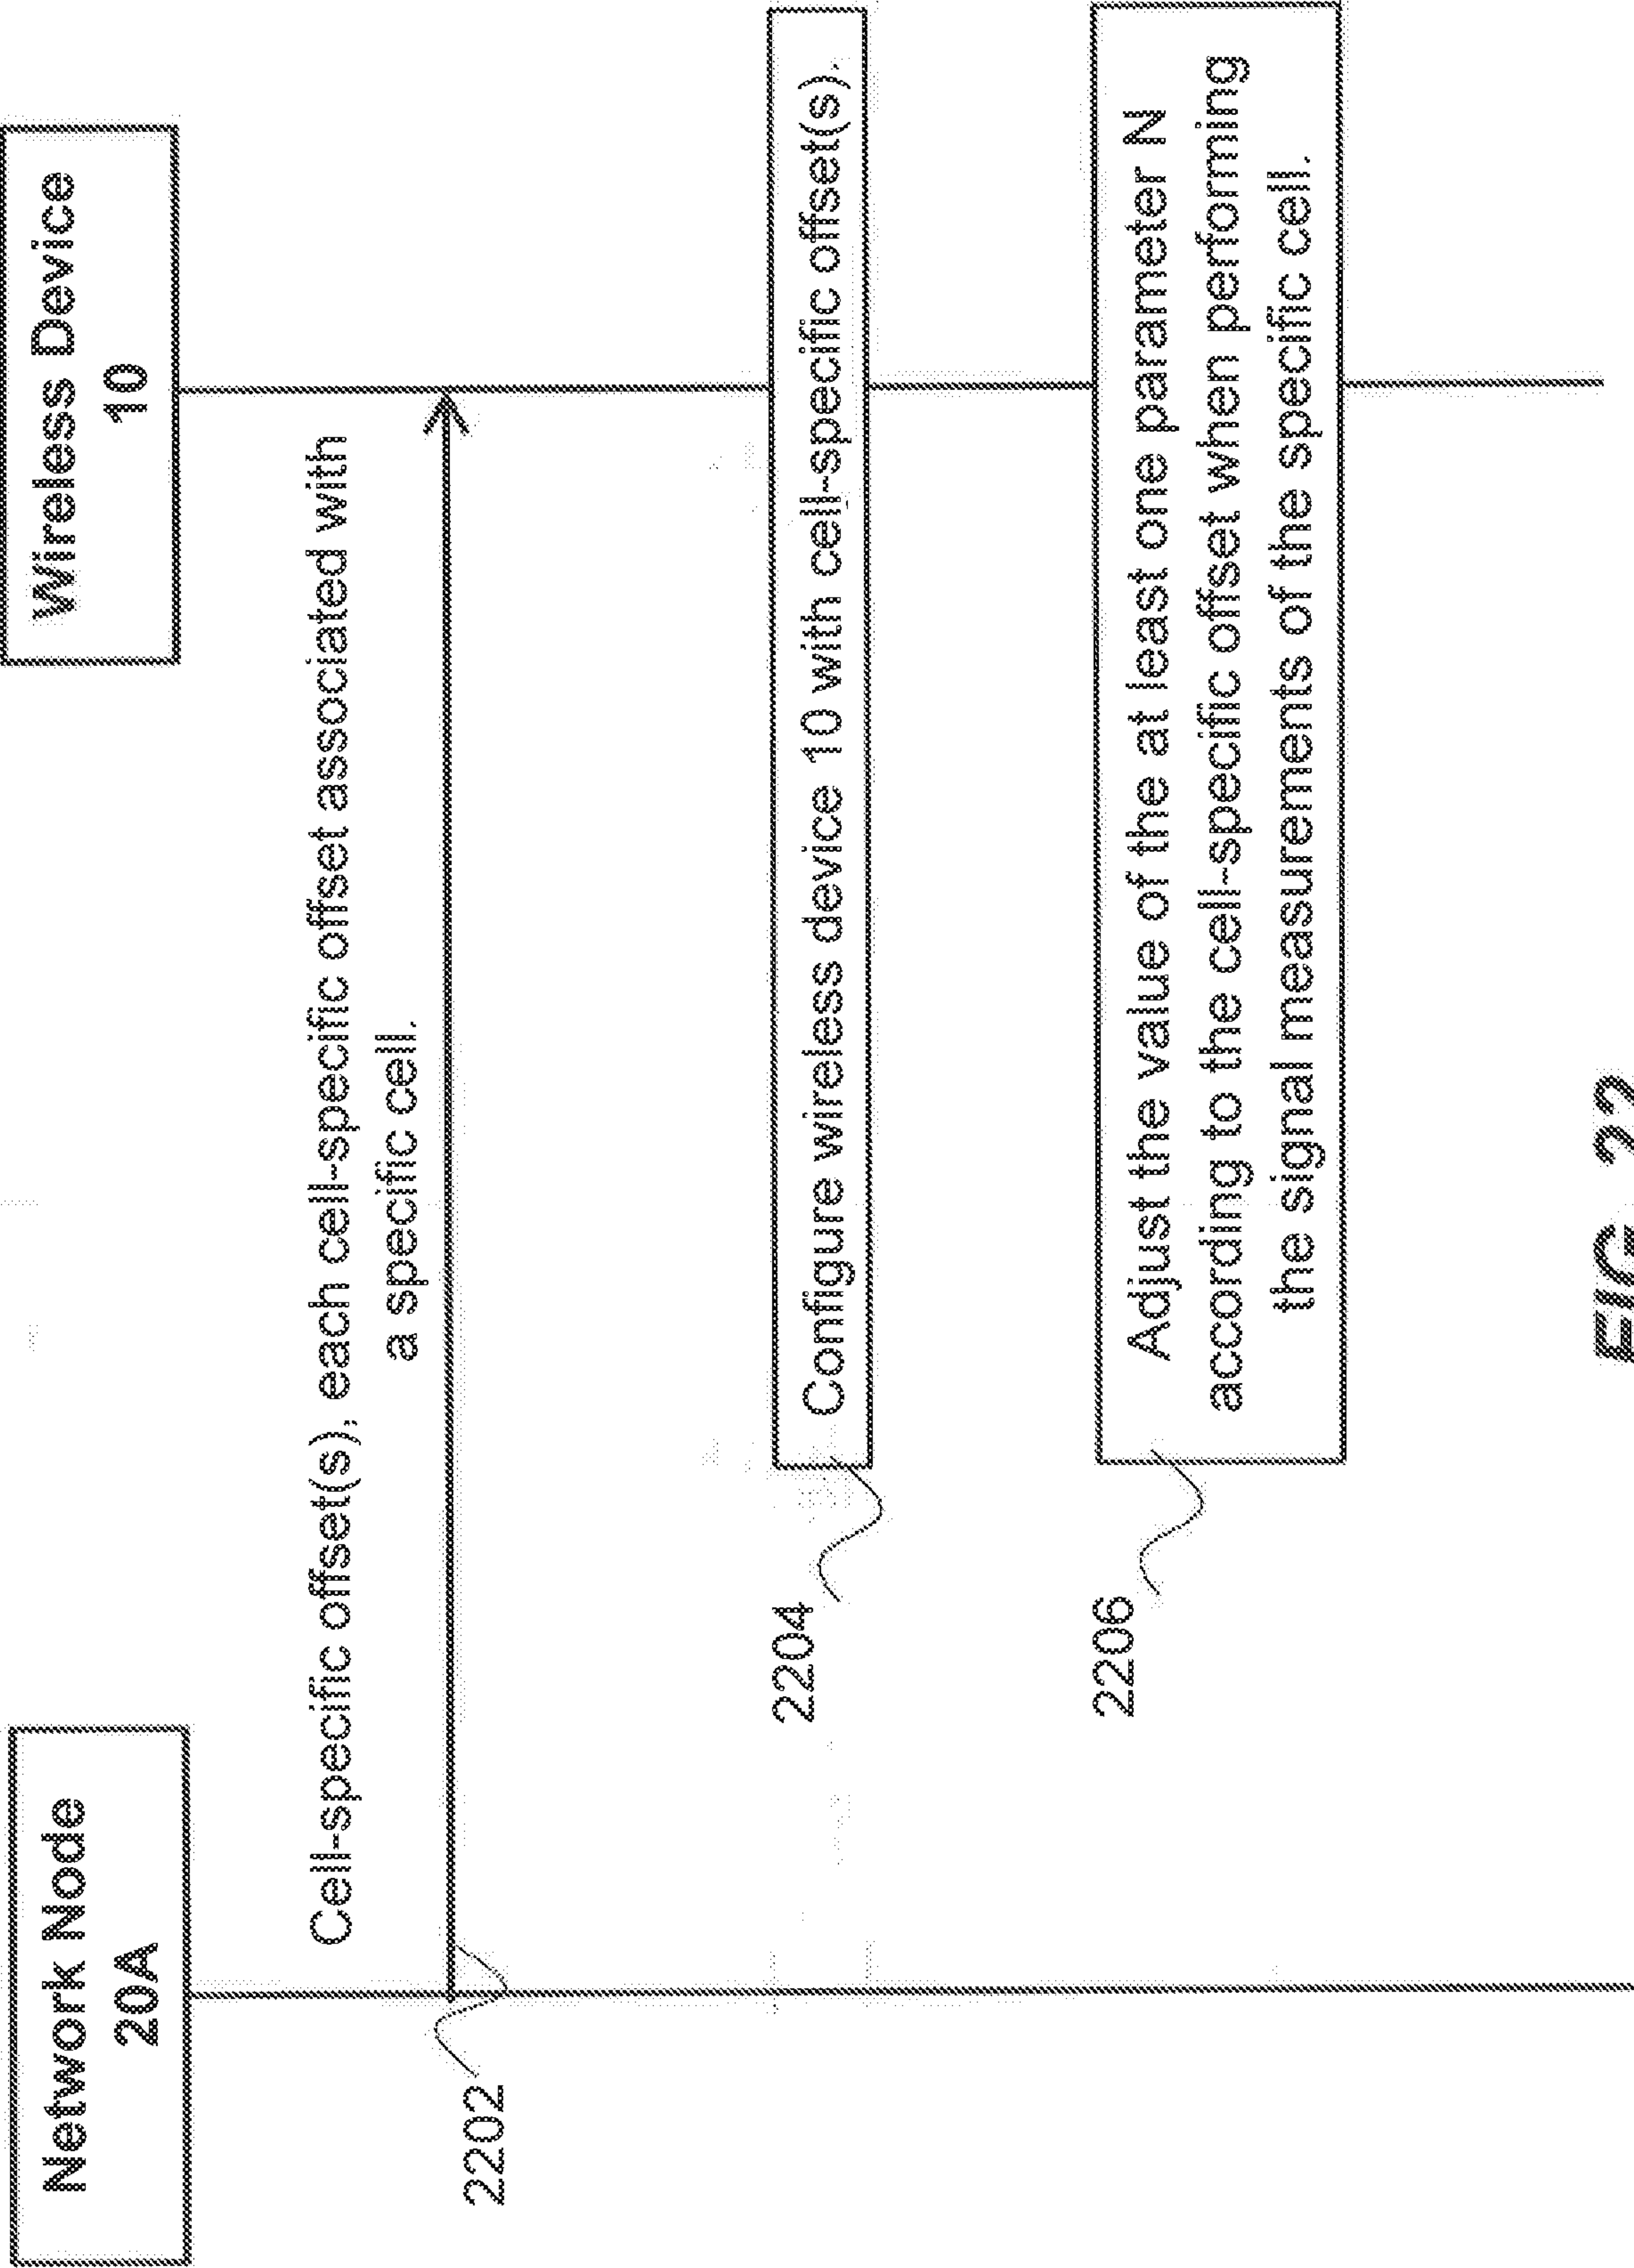


FIG. 22


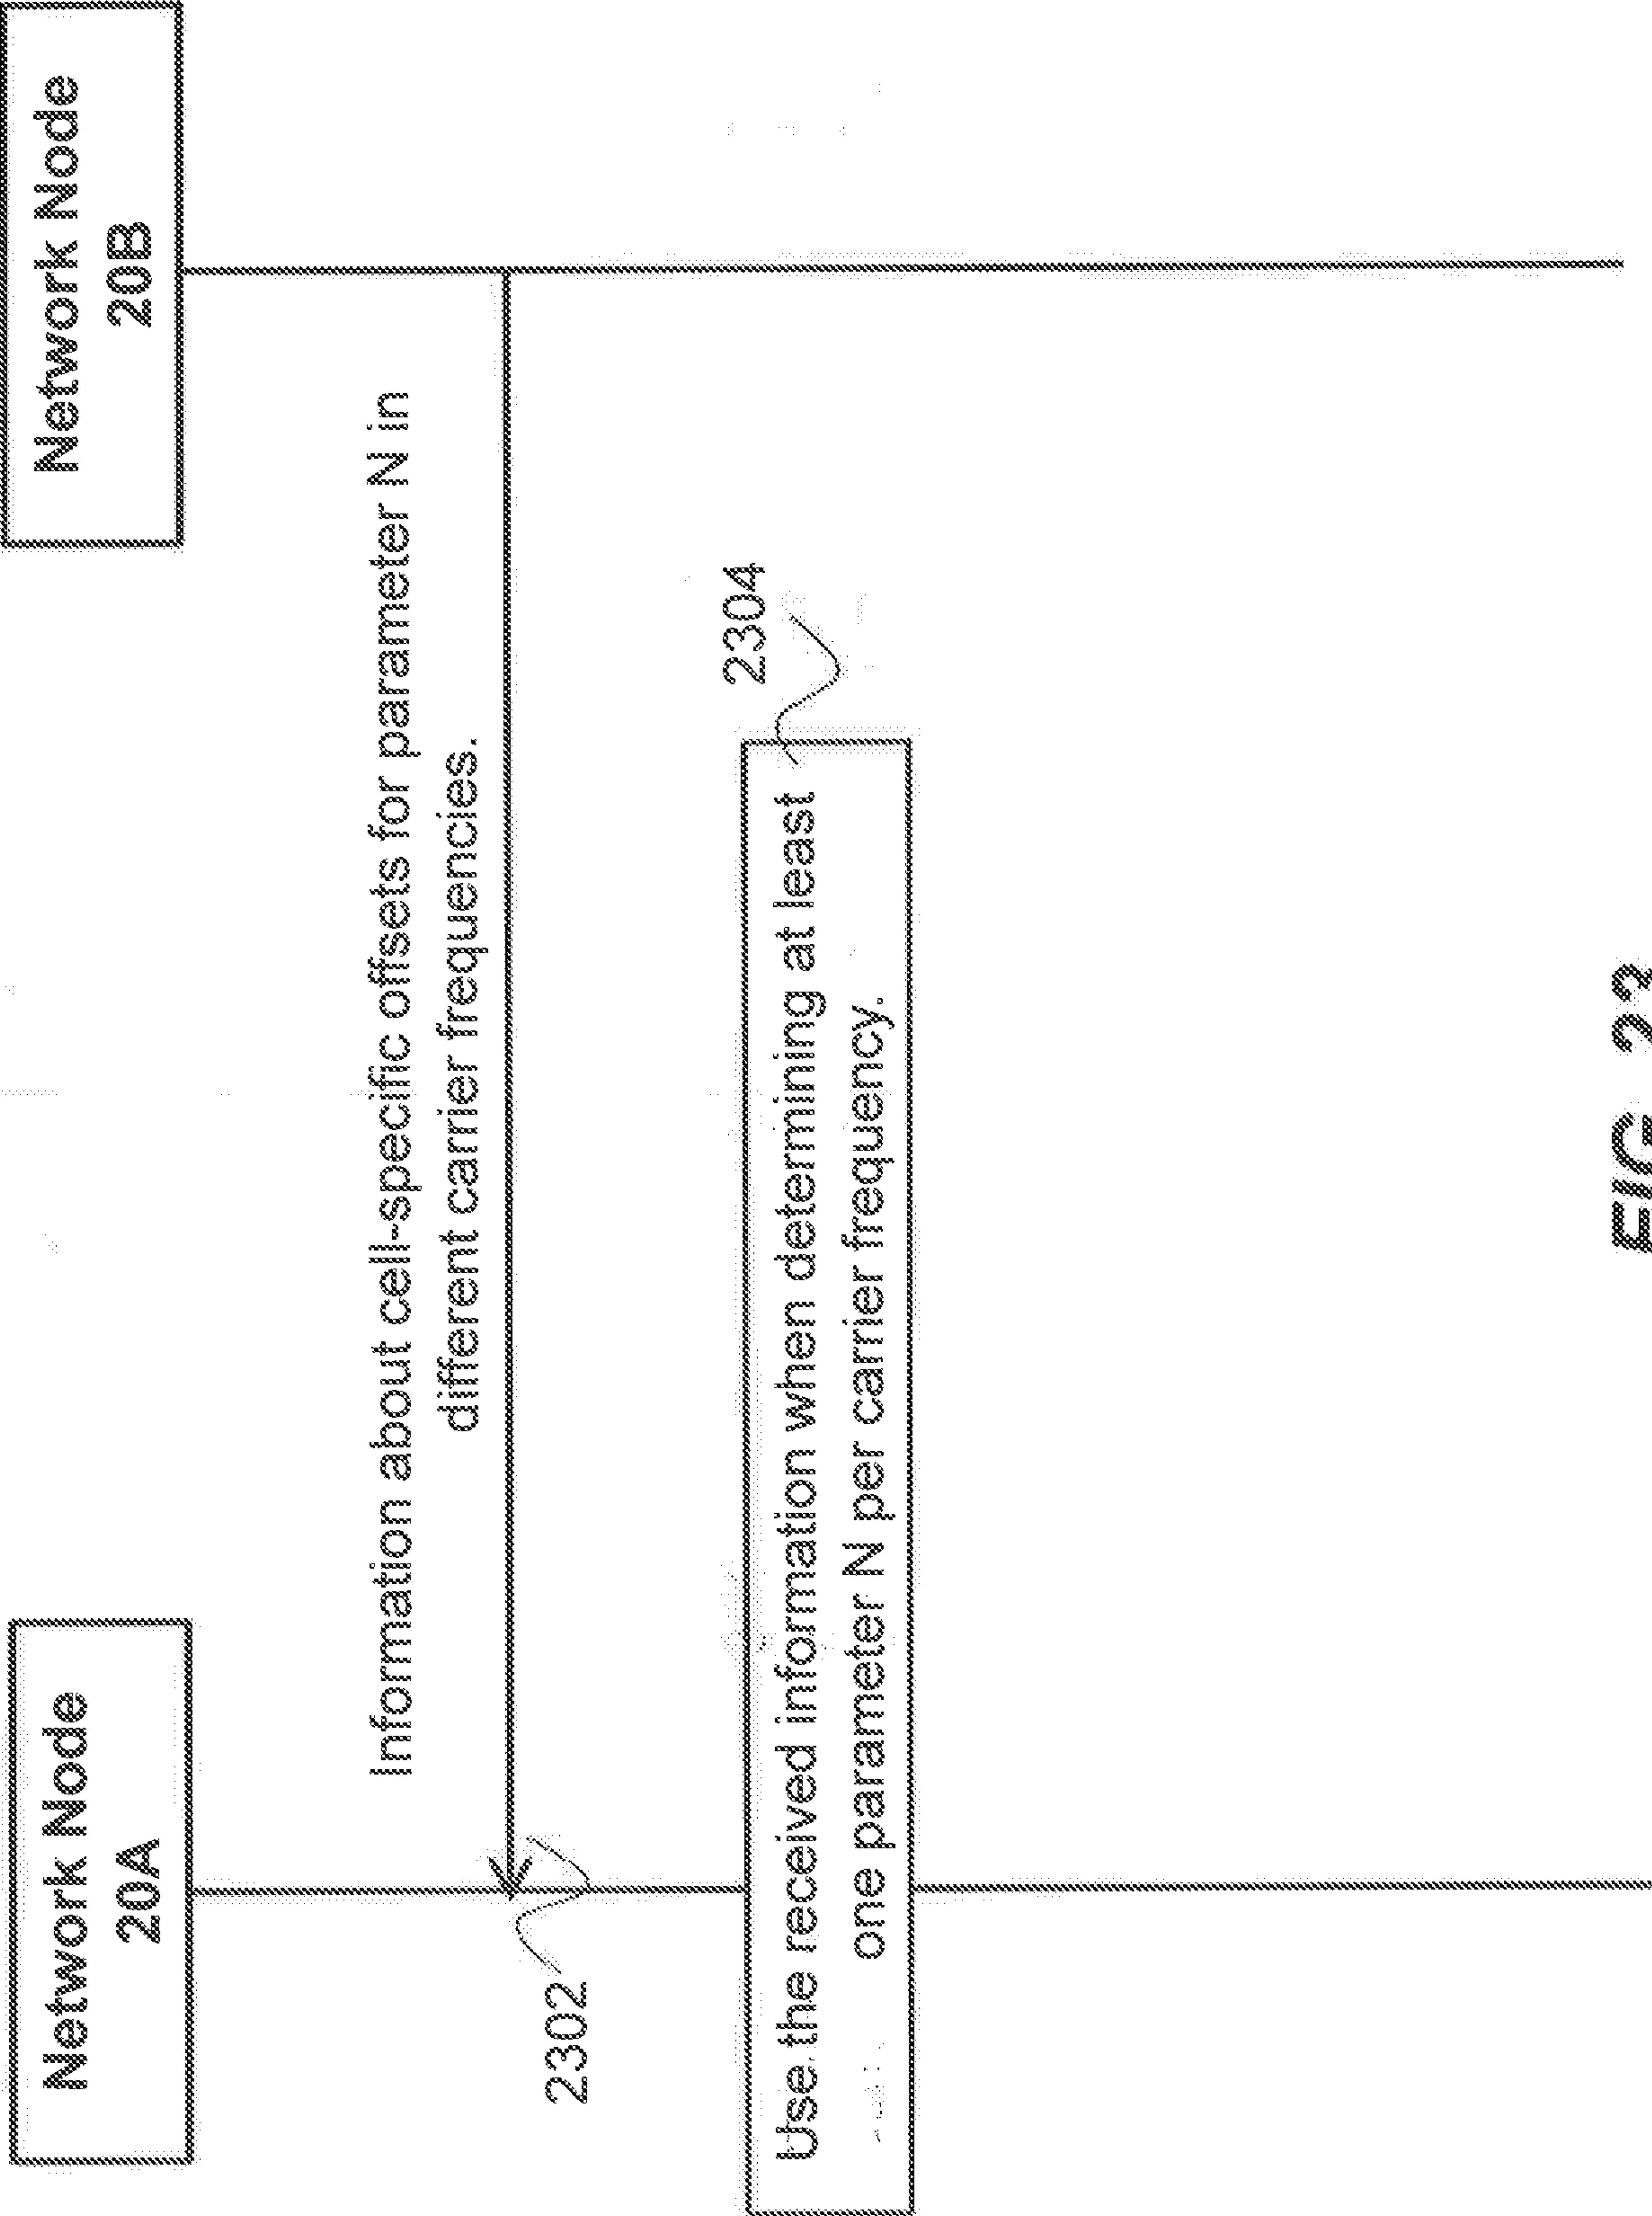


FIG. 23

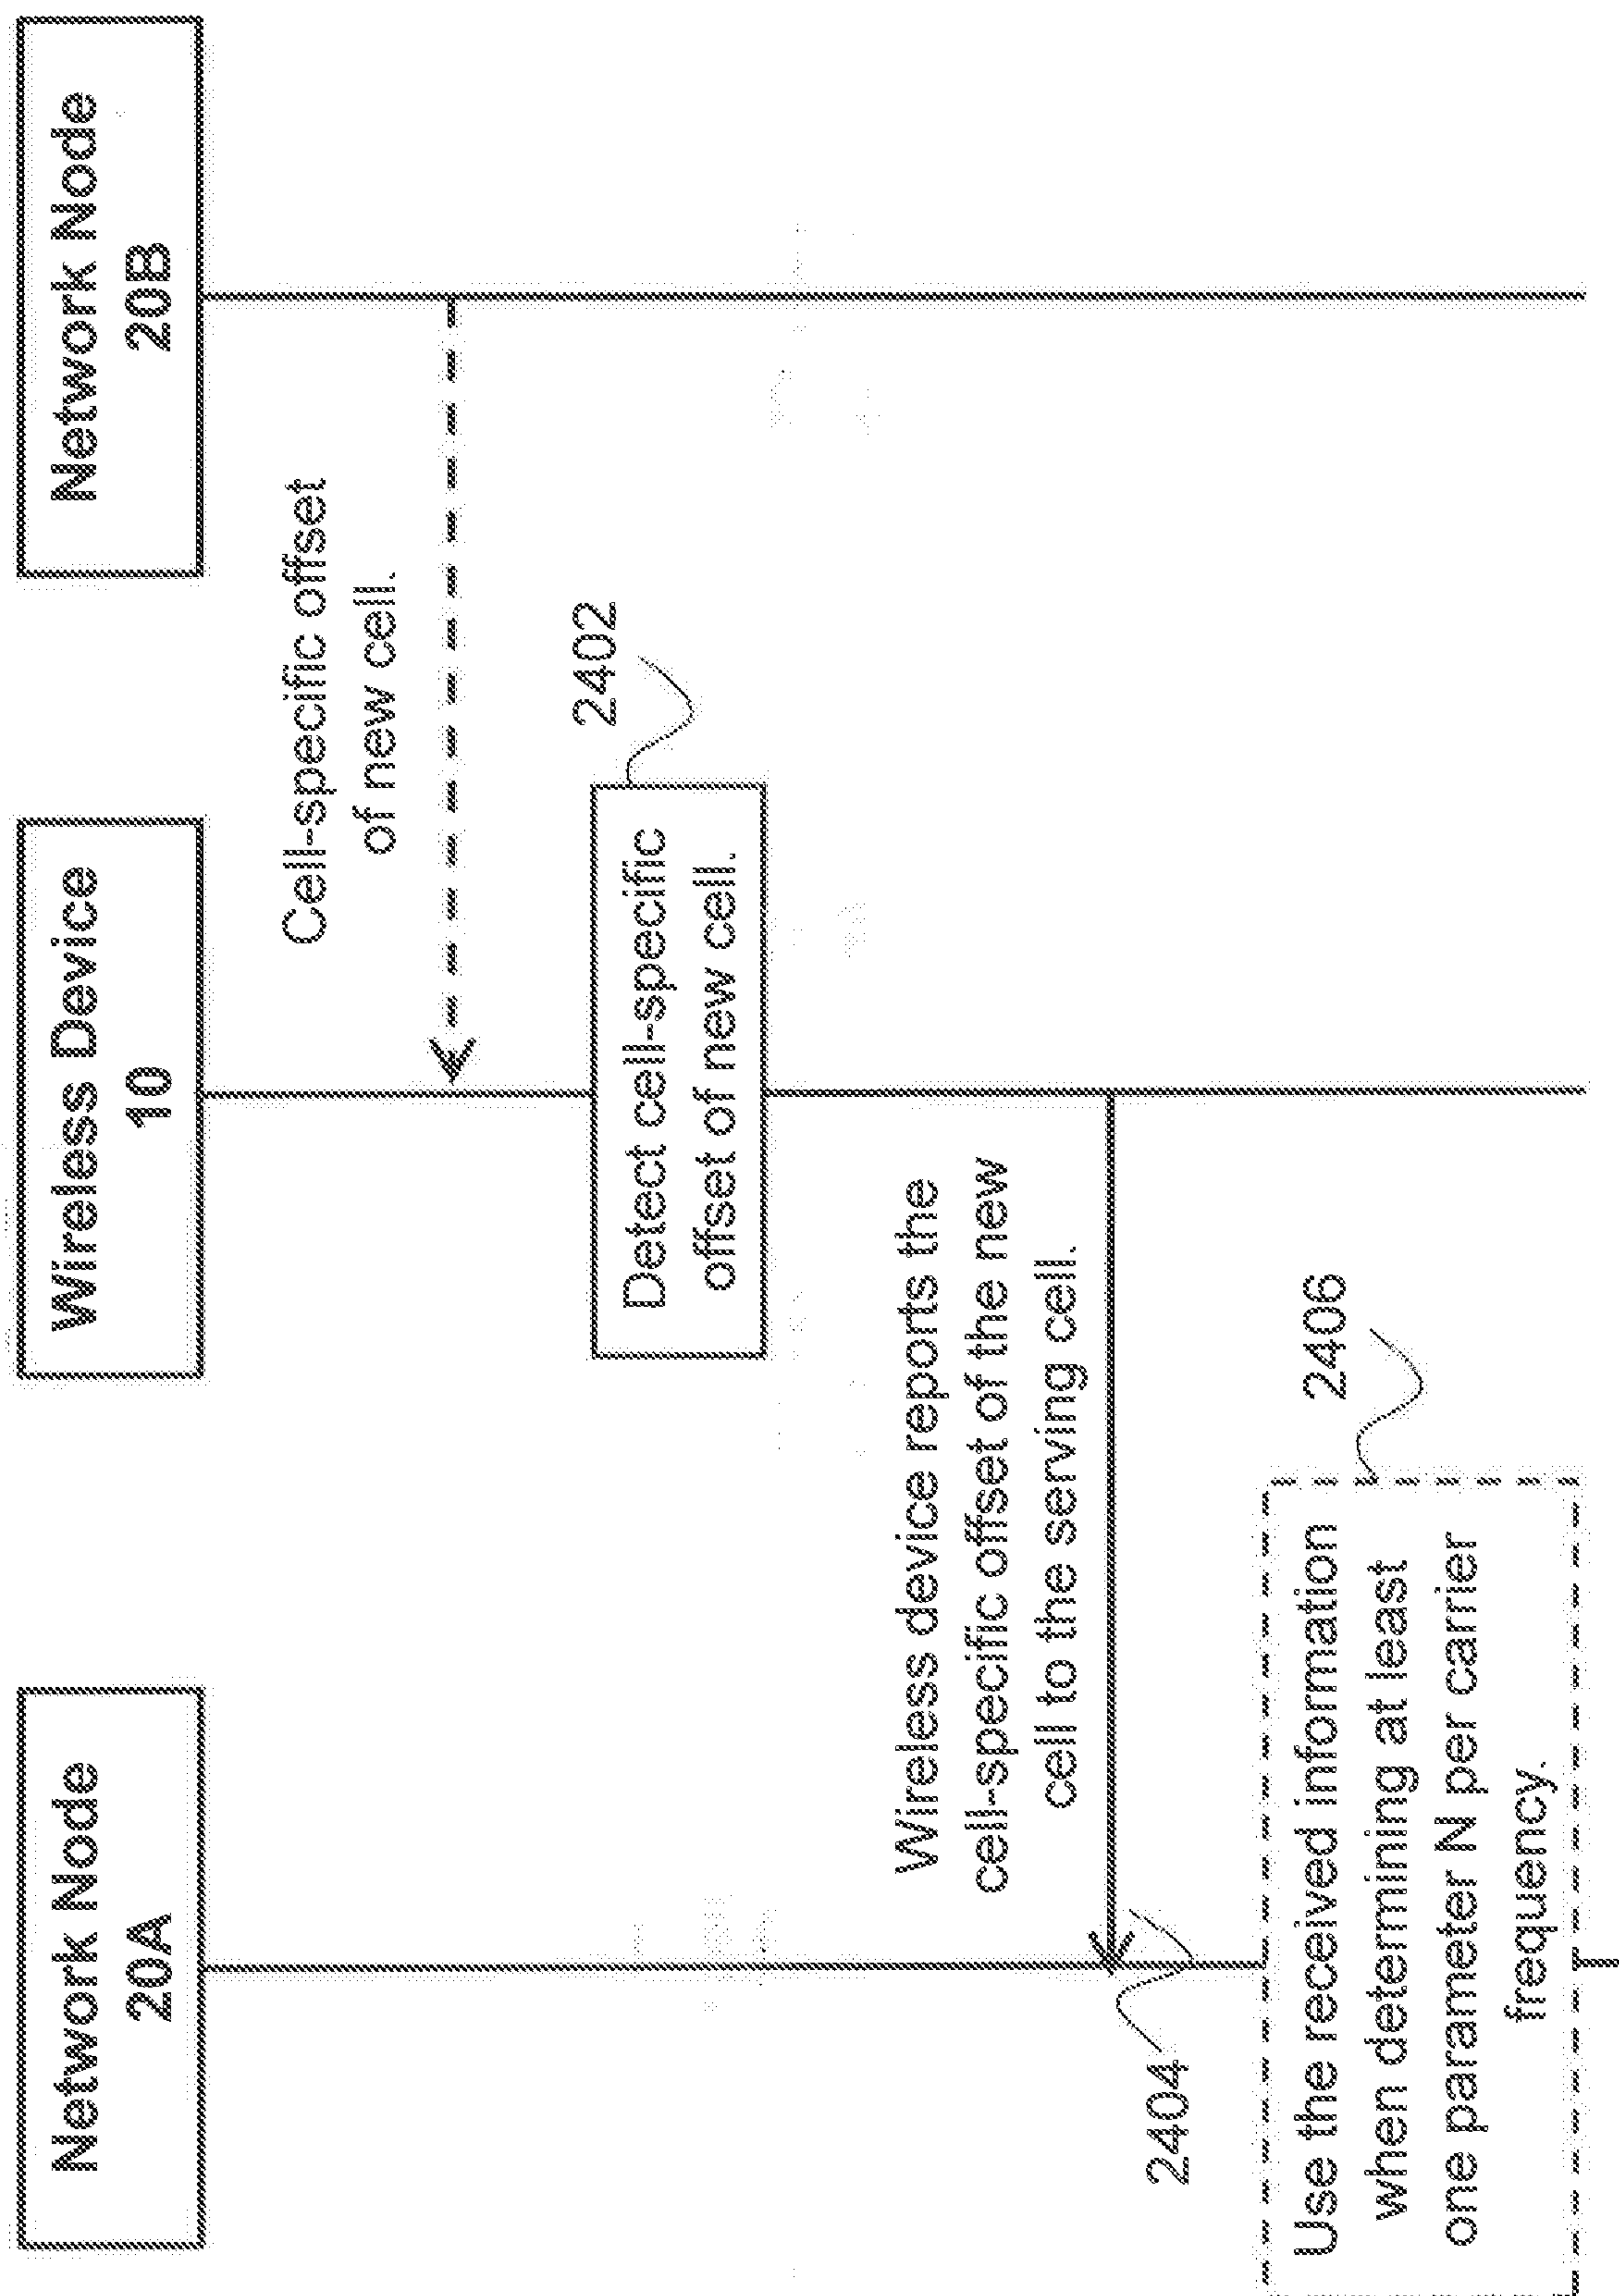

24 611