



(51) International Patent Classification:
B66D 1/74 (2006.01)

(21) International Application Number:
PCT/IT2014/000082

(22) International Filing Date:
26 March 2014 (26.03.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2013A000323 22 April 2013 (22.04.2013) IT

(71) Applicant: **KITE GEN RESEARCH S.R.L.** [IT/IT];
Corso Lombardia 63/D, Area Produttiva Pescarito, I-10099
San Mauro Torinese (TO) (IT).

(72) Inventor: **IPPOLITO, Massimo**; c/o Kite Gen Research
S.r.l., Corso Lombardia 63/D, Area Produttiva Pescarito, I-
10099 San Mauro Torinese (TO) (IT).

(74) Agent: **GARAVELLI, Paolo**; A.Bre.Mar. S.r.l., Via Ser-
vais 27, I-10146 Torino (IT).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED PULLEY FOR HIGH-EFFICIENCY WINCH

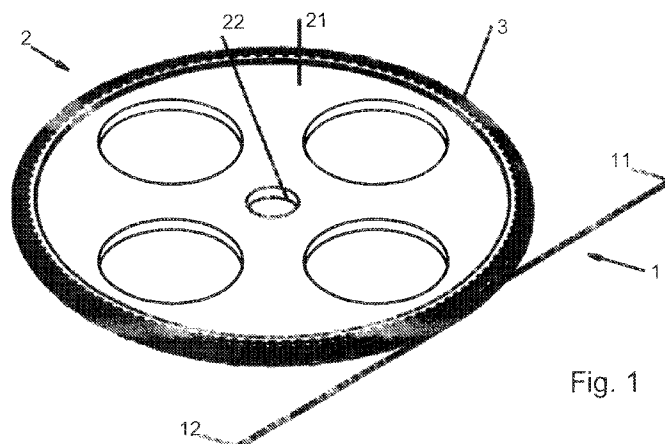


Fig. 1

(57) Abstract: An improved pulley (2) for winch, whereby the pulley is in contact with at least one section of rope (1) included between an inlet section (11), connected to a working load, and an outlet section (12), with minimum or null tension, such pulley (2) comprising a kinematic chain composed of peripheral supports (3).