

TITANIUM-CONTAINING FILM FORMING COMPOSITIONS FOR VAPOR DEPOSITION OF TITANIUM-CONTAINING FILMS

Cross Reference to Related Applications

The present application claims priority to U.S. Application No. 15/968,099, filed May 1, 2018, which is a continuation-in-part of U.S. Application No. 15/827,783 filed November 30, 2017, herein incorporated by reference in its entirety for all purposes.

Technical Field

Disclosed are Ti-containing film forming compositions comprising titanium halide-containing precursors. Also disclosed are methods of synthesizing and using the disclosed precursors to deposit titanium-containing films on one or more substrates via vapor deposition processes.

Background

With the scaling down of semiconductor devices, new materials with high dielectric constant are required. Chemical Vapor Deposition (CVD) and Atomic Layer Deposition (ALD) have become the main deposition techniques for such thin films. CVD and ALD may provide different films (metal, oxide, nitride, etc.) having a finely defined thickness and high step coverage. In CVD and ALD, the precursor molecule plays a critical role to obtain high quality films with high conformality and low impurities.

Among high-k dielectrics, titanium based materials, such as TiO₂, are very promising, whether used as pure or mixed oxides or in laminates. TiN may be used for electrode and/or Cu diffusion barrier applications. Titanium oxides may also be used for their etch resistance properties in lithography applications, such as for hard masks or spacer-defined multiple patterning applications. Titanium silicides may serve as a contact between conductive plugs and the underlying doped silicon layer.

Synthesis and characterization of a variety of titanium halide Lewis adducts is known. See, e.g., Ruff et al., *New titanium compounds*, *Berichte der Deutschen Chemischen Gesellschaft*, 1912, 45, pp.1364-1373;

R. Höltye, Zeitschrift fuer Anorganische und Allgemeine Chemie, 1930, 190, pp 241-256:

Emeléus et al., Complexes of Titanium and Zirconium Halides with Organic Ligands, J. Chemical Society (Resumed), 1958, pp.4245-50;

Fowles et al., Journal of Chemical Society (Resumed), 1959 pp. 990-997;

G.W.A. Fowles et al., The Reaction of Titanium Halides with Tertiary Amines, Journal of Chemical Society (Resumed), 1963, pp. 33-38;

Baker et al., Sulphur Complexes of Quadrivalent Titanium, Journal of the Less-
5 Common Metals, 1964, pp. 47-50;

Eric Turin et al., Adducts of Titanium Tetrahalides with Neutral Lewis Bases. Part I. Structure and Stability: a Vibrational and Multinuclear NMR Study, Inorganica Chimica Acta, 134 (1987) pp. 67-78;

U.S. Pat. No. 5,656,338 to Gordon discloses chemical vapor deposition of
10 titanium metal by forming a liquid solution of titanium tetrabromide in bromine, vaporizing the solution and contacting the vapor mixture with plasma in the vicinity of the substrate;

U.S. Pat. No. 6,706,115 to Leskelä et al. discloses methods for producing metal nitride thin layers have low resistivity by means of atomic layer deposition processes comprising alternate surface reactions of metal and nitrogen source materials; and

15 U.S. Pat. App. Pub. No. 2010/0104755 to Dussarrat et al. discloses methods for producing a metal-containing film by introducing a metal source which does not contain metal-C or metal-N-C s-bonds, a silicon precursor, a nitrogen precursor, a carbon source and a reducing agent into a CVD chamber and reacting same at the surface of a substrate to produce a metal containing film in a single step.

20 Synthesis and characterization of a variety of mixed titanium halo alkylamino derivatives is also known. See, e.g., Von Hans Bürger et al., Dialkylamino-titanbromide, Zeitschrift für anorganische und allgemeine Chemie, Band 370, 1969, pp. 275-282;

Von Hans Bürger et al., Dialkylamido-titaniodide, Zeitschrift für anorganische und allgemeine Chemie, Band 381, 1971, pp. 198-204;

25 US Pat App Pub No. 2005/0042888 to Roder et al. discloses metalorganic precursors of the formula $(R_1R_2N)_{a-b}MX_b$, wherein M is the precursor metal center, selected from the group of Ta, Ti, V, Nb, Si, Al, and B; a is a number equal to the valence of M; $1 \leq b \leq (a-1)$; R_1 and R_2 can be the same as or different from one another and are each independently selected from the group of H, C1-C4 alkyl, C3-C6 cycloalkyl, and R^o_3Si , where each R^o can be the same or different and each R^o is independently selected
30 from H and C1-C4 alkyl; and X is selected from the group of chlorine, fluorine, bromine and iodine.

FR Pat. App. Pub. No. 2871292 to Dussarrat discloses injection of a metallic precursor having the formula MX_4 or MX_5 , wherein M is preferably Hf, an oxidant and of

tetrakis(ethylamino)silane under temperature and pressure conditions that improve the reactivity of the silicon source.

A need remains for thermally stable, volatile, and preferably liquid Ti-containing precursors capable of providing controlled film thickness during vapor phase deposition at high temperature.

Summary

Ti-containing film forming compositions are disclosed comprising Ti halide-containing precursors having one of the following formula:



with $b=3$ or 4 ; $c=1-3$; $X = \text{Br}$ or I ; $A = \text{SR}_2$, SeR_2 , TeR_2 , or PR_3 , and each R is independently H or a C1-C10 hydrocarbon.

Also disclosed are Ti-containing film forming compositions comprising Ti halide-containing precursors having one of the following formula:



with $y=1-3$; $z=1-3$; $y+z=4$; $X = \text{Br}$ or I ; each R' independently a C1-C5 hydrocarbon or SiR'''_3 , with each R''' independently being H or a C1-C5 hydrocarbon; and $R'' =$ a C1-C5 hydrocarbon.

Any of the disclosed Ti-containing film forming compositions may further include one or more of the following aspects:

- each R independently being a C1-C5 hydrocarbon;
- each R being a different C1-C5 hydrocarbon;
- $A = \text{SRR}'$, SeRR' , TeRR' , or $\text{PRR}'\text{R}''$, with each R , R' , and $R'' = \text{H}$ or a C1-C10 hydrocarbon, provided that R does not equal R' or R'' ;
- $b=4$ when $c=1$ or 2 ;
- $b=3$ when $c=3$;
- the Ti halide-containing precursor having a melting point lower than the melting point of the analogous TiX_4 compound;
- X is Br ;
- the Ti halide-containing precursor having a melting point between approximately -50°C and approximately 39°C at standard pressure;
- X is I ;
- the Ti halide-containing precursor having a melting point between approximately -50°C and approximately 150°C at standard pressure;

- the Ti halide-containing precursor having a melting point between approximately -50°C and approximately 30°C at standard pressure;
- the Ti halide-containing precursor being a liquid at standard temperature and pressure;
- 5 • A is SR_2 , with each R independently a C1-C5 hydrocarbon;
- A is SRR' , with R and R' independently a C1-C5 hydrocarbon, provided that R does not equal R';
- A is SPr_2 ;
- A is SBu_2 ;
- 10 • A is SEtPr ;
- A is tetrahydrothiophene;
- $\text{A}=\text{SR}_2$, $c=1$, and each R is independently a C3-C5 hydrocarbon;
- $\text{A}=\text{SR}_2$, $c=2$, and each R is independently a C1-2 hydrocarbon;
- $\text{A}=\text{tetrahydrothiophene}$ and $c=2$;
- 15 • the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{SEt}(\text{nPr})$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{nPr})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{iPr})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{SBu}_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{nBu})_2$;
- 20 • the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{tBu})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{iBu})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot\text{S}(\text{sBu})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot(\text{SEt}_2)_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot(\text{SMe}_2)_2$;
- 25 • the Ti halide-containing precursor being $\text{TiBr}_4\cdot(\text{SMeEt})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4\cdot(\text{tetrahydrothiophene})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{SEt}(\text{nPr})$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{nPr})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{iPr})_2$;
- 30 • the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{SBu}_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{nBu})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{tBu})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{iBu})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4\cdot\text{S}(\text{sBu})_2$;

- the Ti halide-containing precursor being $\text{TiI}_4:(\text{SEt}_2)_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{SMe}_2)_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{SMeEt})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tetrahydrothiophene})_2$;
- 5 • A is SeR_2 , with each R independently a C1-C5 hydrocarbon;
- A is SeR_2 , with each R being a different C1-C5 hydrocarbon;
- A is SePr_2 ;
- A is SeBu_2 ;
- A is SeEtPr ;
- 10 • A is tetrahydroselenophene;
- $\text{A}=\text{SeR}_2$, $c=1$, and each R is independently a C3-C5 hydrocarbon;
- $\text{A}=\text{SeR}_2$, $c=2$, and each R is independently a C1-2 hydrocarbon;
- $\text{A}=\text{tetrahydroselenophene}$ and $c=2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:\text{SeEtPr}$;
- 15 • the Ti halide-containing precursor being $\text{TiBr}_4:\text{SePr}_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:\text{SeBu}_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{SeMe}_2)_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{SEt}_2)_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{SMeEt})_2$;
- 20 • the Ti halide-containing precursor being $\text{TiBr}_4:(\text{tetrahydroselenophene})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:\text{SeEtPr}$;
- the Ti halide-containing precursor being $\text{TiI}_4:\text{SePr}_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:\text{SeBu}_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{SeMe}_2)_2$;
- 25 • the Ti halide-containing precursor being $\text{TiI}_4:(\text{SEt}_2)_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{SMeEt})_2$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tetrahydroselenophene})_2$;
- L is TeR_2 , with each R independently a C1-C5 hydrocarbon;
- L is TeR_2 , with each R being a different C1-C5 hydrocarbon;
- 30 • A is TePr_2 ;
- A is TeBu_2 ;
- A is EtPr ;
- A is tetrahydrotellurophene;
- $\text{A}=\text{TeR}_2$, $c=1$, with each R independently a C3-C5 hydrocarbon;

- A=TeR₂, c=2, with each R independently a C1-2 hydrocarbon;
- A= tetrahydrotellurophene and c=2;
- the Ti halide-containing precursor being TiBr₄:TeEtPr;
- the Ti halide-containing precursor being TiBr₄:TePr₂;
- 5 • the Ti halide-containing precursor being TiBr₄:TeBu₂;
- the Ti halide-containing precursor being TiBr₄:(TeMe₂)₂;
- the Ti halide-containing precursor being TiBr₄:(TeEt₂)₂;
- the Ti halide-containing precursor being TiBr₄:(TeMeEt)₂;
- the Ti halide-containing precursor being TiBr₄:(tetrahydrotellurophene)₂;
- 10 • the Ti halide-containing precursor being TiI₄:TeEtPr;
- the Ti halide-containing precursor being TiI₄:TePr₂;
- the Ti halide-containing precursor being TiI₄:TeBu₂;
- the Ti halide-containing precursor being TiI₄:(TeMe₂)₂;
- the Ti halide-containing precursor being TiI₄:(TeEt₂)₂;
- 15 • the Ti halide-containing precursor being TiI₄:(TeMeEt)₂;
- the Ti halide-containing precursor being TiI₄:(tetrahydrotellurophene)₂;
- A is PR₃, with each R independently H or a C1-C5 hydrocarbon;
- A is PRR'R'', with R, R', and R'' H or a C1-C5 hydrocarbon, provided that R does not equal R' or R'';
- 20 • the Ti halide-containing precursor being TiBr₄:PR₃, with each R independently H or a C3-C10 hydrocarbon;
- the Ti halide-containing precursor being TiBr₄:PH₃;
- the Ti halide-containing precursor being TiBr₄:(PR₃)₂, with each R independently H or a C1-2 hydrocarbon;
- 25 • the Ti halide-containing precursor being TiBr₄:(PH₃)₂;
- the Ti halide-containing precursor being TiBr₃:(PR₃)₃, with each R independently H or a C1-2 hydrocarbon;
- the Ti halide-containing precursor being TiBr₃:(PH₃)₃;
- the Ti halide-containing precursor being TiBr₄:(R₂P-(CH₂)_n-PR₂), with each R independently a C1-5 hydrocarbon and n=1-4;
- 30 • the Ti halide-containing precursor being TiBr₄:(Me₂P-(CH₂)_n-PMe₂);
- the Ti halide-containing precursor being TiBr₄:(EtMeP-(CH₂)_n-PMeEt);
- the Ti halide-containing precursor being TiBr₄:(Et₂P-(CH₂)_n-PEt₂);
- the Ti halide-containing precursor being TiBr₄:(iPr₂P-(CH₂)_n-PiPr₂);

- [illegible]

- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tBuHP}-(\text{CH}_2)_n-\text{PhtBu})$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tAmHP}-(\text{CH}_2)_n-\text{PhtAm})$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{Me}_2\text{P}-(\text{CH}_2)_2-\text{PMe}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{EtMeP}-(\text{CH}_2)_2-\text{PMeEt})$;
- 5 • the Ti halide-containing precursor being $\text{TiI}_4:(\text{Et}_2\text{P}-(\text{CH}_2)_2-\text{PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{iPr}_2\text{P}-(\text{CH}_2)_2-\text{PiPr}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{HiPrP}-(\text{CH}_2)_2-\text{PHiPr})$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tBu}_2\text{P}-(\text{CH}_2)_2-\text{PtBu}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_4:(\text{tBuHP}-(\text{CH}_2)_2-\text{PhtBu})$;
- 10 • the Ti halide-containing precursor being $\text{TiI}_4:(\text{tAmHP}-(\text{CH}_2)_2-\text{PhtAm})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)$, with each R independently a C1-5 hydrocarbon and $n=1-4$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Me}_2\text{P}-(\text{CH}_2)_n-\text{PMe}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{EtMeP}-(\text{CH}_2)_n-\text{PMeEt})$;
- 15 • the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Et}_2\text{P}-(\text{CH}_2)_n-\text{PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{iPr}_2\text{P}-(\text{CH}_2)_n-\text{PiPr}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{HiPrP}-(\text{CH}_2)_n-\text{PHiPr})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tBu}_2\text{P}-(\text{CH}_2)_n-\text{PtBu}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tBuHP}-(\text{CH}_2)_n-\text{PhtBu})$;
- 20 • the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tAmHP}-(\text{CH}_2)_n-\text{PhtAm})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Me}_2\text{P}-(\text{CH}_2)_2-\text{PMe}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{EtMeP}-(\text{CH}_2)_2-\text{PMeEt})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Et}_2\text{P}-(\text{CH}_2)_2-\text{PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{iPr}_2\text{P}-(\text{CH}_2)_2-\text{PiPr}_2)$;
- 25 • the Ti halide-containing precursor being $\text{TiBr}_3:(\text{HiPrP}-(\text{CH}_2)_2-\text{PHiPr})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tBu}_2\text{P}-(\text{CH}_2)_2-\text{PtBu}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tBuHP}-(\text{CH}_2)_2-\text{PhtBu})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tAmHP}-(\text{CH}_2)_2-\text{PhtAm})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Me}_2\text{P}-(\text{CH}_2)_2-\text{PMe}_2)$;
- 30 • the Ti halide-containing precursor being $\text{TiBr}_3:(\text{EtMeP}-(\text{CH}_2)_2-\text{PMeEt})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{Et}_2\text{P}-(\text{CH}_2)_2-\text{PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{iPr}_2\text{P}-(\text{CH}_2)_2-\text{PiPr}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{HiPrP}-(\text{CH}_2)_2-\text{PHiPr})$;
- the Ti halide-containing precursor being $\text{TiBr}_3:(\text{tBu}_2\text{P}-(\text{CH}_2)_2-\text{PtBu}_2)$;

- the Ti halide-containing precursor being $\text{TiBr}_3\text{:}(\text{tBuHP}-(\text{CH}_2)_2\text{-PhtBu})$;
- the Ti halide-containing precursor being $\text{TiBr}_3\text{:}(\text{tAmHP}-(\text{CH}_2)_2\text{-PhtAm})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Me}_2\text{P}-(\text{CH}_2)_n\text{-PMe}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{EtMeP}-(\text{CH}_2)_n\text{-PMeEt})$;
- 5 • the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Et}_2\text{P}-(\text{CH}_2)_n\text{-PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{iPr}_2\text{P}-(\text{CH}_2)_n\text{-PiPr}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{HiPrP}-(\text{CH}_2)_n\text{-PHiPr})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBu}_2\text{P}-(\text{CH}_2)_n\text{-PtBu}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBuHP}-(\text{CH}_2)_n\text{-PhtBu})$;
- 10 • the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tAmHP}-(\text{CH}_2)_n\text{-PhtAm})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Me}_2\text{P}-(\text{CH}_2)_2\text{-PMe}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{EtMeP}-(\text{CH}_2)_2\text{-PMeEt})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Et}_2\text{P}-(\text{CH}_2)_2\text{-PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{iPr}_2\text{P}-(\text{CH}_2)_2\text{-PiPr}_2)$;
- 15 • the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{HiPrP}-(\text{CH}_2)_2\text{-PHiPr})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBu}_2\text{P}-(\text{CH}_2)_2\text{-PtBu}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBuHP}-(\text{CH}_2)_2\text{-PhtBu})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tAmHP}-(\text{CH}_2)_2\text{-PhtAm})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Me}_2\text{P}-(\text{CH}_2)_2\text{-PMe}_2)$;
- 20 • the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{EtMeP}-(\text{CH}_2)_2\text{-PMeEt})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{Et}_2\text{P}-(\text{CH}_2)_2\text{-PEt}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{iPr}_2\text{P}-(\text{CH}_2)_2\text{-PiPr}_2)$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{HiPrP}-(\text{CH}_2)_2\text{-PHiPr})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBu}_2\text{P}-(\text{CH}_2)_2\text{-PtBu}_2)$;
- 25 • the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tBuHP}-(\text{CH}_2)_2\text{-PhtBu})$;
- the Ti halide-containing precursor being $\text{TiI}_3\text{:}(\text{tAmHP}-(\text{CH}_2)_2\text{-PhtAm})$;
- A is R(=O)Cl , with R being a C2-C4 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiBr}_4\text{:R(=O)Cl}$, with R being a C2-C10 hydrocarbon;
- 30 • the Ti halide-containing precursor being $\text{TiBr}_4\text{:}(\text{Me-C(=O)Cl})$;
- the Ti halide-containing precursor being $\text{TiBr}_4\text{:}(\text{Ph-C(=O)Cl})$;
- the Ti halide-containing precursor being $\text{TiI}_4\text{:}(\text{Me-C(=O)Cl})$;
- A is RNO_2 , with R being a C1-C5 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiBr}_4\text{:}(\text{MeNO}_2)$;

- the Ti halide-containing precursor being $\text{TiI}_4:(\text{MeNO}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{EtNO}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{PrNO}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{PhNO}_2)$;
- 5 • A is $\text{R}\equiv\text{N}$, with R being a C2-C6 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{Me-C}\equiv\text{N})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{Et-C}\equiv\text{N})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{Pr-C}\equiv\text{N})_2$;
- the Ti halide-containing precursor being $\text{TiBr}_4:(\text{Bu-C}\equiv\text{N})_2$;
- 10 • the Ti halide-containing precursor being $\text{TiBr}_4:(\text{Ph-C}\equiv\text{N})_2$;
- A is pyridine;
- A is piperidine;
- the Ti halide-containing precursor being $\text{TiBr}_4:\text{pyridine}$;
- the Ti halide-containing precursor being $\text{TiBr}_4:\text{piperidine}$;
- 15 • the Ti halide-containing precursor being $\text{TiBr}_4:2,2,6,6\text{-tetramethylpiperidine}$;
- the Ti halide-containing precursor being $\text{TiX}_3(\text{NR}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{NR}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{NEt}_2)$;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{pyrrolidine})$;
- 20 • the Ti halide-containing precursor being $\text{TiBr}_3(\text{pyridine})$;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{piperidine})$;
- the Ti halide-containing precursor being $\text{TiI}_3(\text{NR}_2)$;
- the Ti halide-containing precursor being $\text{TiX}_2(\text{NR}_2)_2$;
- the Ti halide-containing precursor being $\text{TiBr}_2(\text{NR}_2)_2$;
- 25 • the Ti halide-containing precursor being $\text{TiBr}_2(\text{NMe}_2)_2$;
- the Ti halide-containing precursor being $\text{TiI}_2(\text{NR}_2)_2$;
- the Ti halide-containing precursor being $\text{TiX}(\text{NR}_2)_3$;
- the Ti halide-containing precursor being $\text{TiBr}(\text{NR}_2)_3$;
- the Ti halide-containing precursor being $\text{TiI}(\text{NR}_2)_3$;
- 30 • the Ti halide-containing precursor being $\text{TiX}_3(\text{N}^{\text{R}}\text{-R}'\text{-fmd})$, with R and R' independently being a C1-C5 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{N}^{\text{IPr}}\text{-fmd})$;
- the Ti halide-containing precursor being $\text{TiI}_3(\text{N}^{\text{IPr}}\text{-fmd})$;

- the Ti halide-containing precursor being $\text{TiX}_3(\text{N}^{\text{R,R'}}\text{R}''\text{-amd})$, with R, R', and R'' independently being a C1-C5 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiBr}_3(\text{N}^{\text{iPr}}\text{Me-amd})$;
- the Ti halide-containing precursor being $\text{TiI}_3(\text{N}^{\text{iPr}}\text{Me-amd})$;
- 5 • the Ti halide-containing precursor being $\text{TiBr}_2(-\text{N}(\text{R})-\text{C}_2\text{H}_4-\text{N}(\text{R})-)$ with each R independently being a C1-C5 hydrocarbon;
- the Ti halide-containing precursor being $\text{TiIBr}_2(-\text{N}(\text{R})-\text{C}_2\text{H}_4-\text{N}(\text{R})-)$ with each R independently being a C1-C5 hydrocarbon;
- 10 • the Ti-containing film forming compositions comprising between approximately 0.1 molar % and approximately 50 molar % of the titanium halide-containing precursors;
- the Ti-containing film forming composition having a viscosity between approximately 1 and approximately 50 cps;
- the Ti-containing film forming composition having a viscosity, between
- 15 approximately 1 and approximately 20 cps;
- the Ti-containing film forming composition comprising between approximately 95% w/w to approximately 100% w/w of the titanium halide-containing precursors;
- the Ti-containing film forming composition comprising between approximately
- 20 99% w/w to approximately 100% w/w of the titanium halide-containing precursors;
- the Ti-containing film forming composition further comprising a solvent;
- the Ti-containing film forming composition comprising between approximately 0 % w/w and 10 % w/w of a hydrocarbon solvent or of free adduct;
- 25 • the Ti-containing film forming composition comprising between approximately 0 % w/w and 5 % w/w of a hydrocarbon solvent or of free adduct;
- the Ti-containing film forming composition comprising between approximately 0 % w/w and 5 ppm of H_2O ;
- the Ti-containing film forming composition comprising between approximately
- 30 0 % w/w and 0.2% w/w of a mixture of oxybromide ($\text{TiBr}_2(=\text{O})$), hydroxybromide ($\text{TiBr}_3(\text{OH})$), and oxides (TiO_2);
- the Ti-containing film forming composition comprising between approximately 0 % w/w and 0.1% w/w of a mixture of oxybromide ($\text{TiBr}_2(=\text{O})$), hydroxybromide ($\text{TiBr}_3(\text{OH})$), and oxides (TiO_2);

- the Ti-containing film forming composition comprising between approximately 0 % w/w and 0.2% w/w of a mixture of oxyiodide ($\text{TiI}_2(=\text{O})$), hydroxyiodide ($\text{TiI}_3(\text{OH})$), and oxides (TiO_2);
- 5 • the Ti-containing film forming composition comprising between approximately 0 % w/w and 0.1% w/w of a mixture of oxyiodide ($\text{TiI}_2(=\text{O})$), hydroxyiodide ($\text{TiI}_3(\text{OH})$), and oxides (TiO_2);
- the Ti-containing film forming composition comprising between approximately 0 % w/w and 0.1% w/w of hydrogen bromide (HBr);
- the Ti-containing film forming composition comprising between approximately 10 0 % w/w and 0.1% w/w of hydrogen iodide (HI);
- the Ti-containing film forming composition comprising between approximately 0 % w/w and 0.2% w/w of $\text{TiX}_4:\text{SR}'_2$, wherein $\text{R}' \neq \text{R}$;
- the solvent being selected from the group consisting of C1-C16 hydrocarbons, whether saturated or unsaturated, ketones, ethers, glymes, esters,
- 15 tetrahydrofuran (THF), dimethyl oxalate (DMO), and combinations thereof;
- the solvent being a C1-C16 hydrocarbon;
- the solvent being a C1-C16 halogenated hydrocarbon;
- the solvent being tetrahydrofuran (THF);
- the solvent being DMO;
- 20 • the solvent being an ether;
- the solvent being a glyme; or
- the difference between the boiling point of the Ti halide-containing precursor and the solvent being less than 100°C.

Also disclosed are Ti-containing film forming compositions delivery devices 25 comprising a canister having an inlet conduit and an outlet conduit and containing any of the Ti-containing film forming compositions disclosed above. The disclosed delivery devices may include one or more of the following aspects:

- the Ti-containing film forming composition having a total concentration of metal contaminants of less than 10 ppmw;
- 30 • an end of the inlet conduit located above a surface of the Ti-containing film forming composition and an end of the outlet conduit located above the surface of the Ti-containing film forming composition;
- an end of the inlet conduit located above a surface of the Ti-containing film forming composition and an end of the outlet conduit located below the surface of 35 the Ti-containing film forming composition;

- an end of the inlet conduit located below a surface of the Ti-containing film forming composition and an end of the outlet conduit located above the surface of the Ti-containing film forming composition; or
- the titanium halide-containing precursor being $\text{TiBr}_4 \cdot \text{S}(\text{nPr})_2$.

Also disclosed are processes for the deposition of Ti-containing films on one or more substrates. At least one Ti-containing film forming composition disclosed above is introduced into a reactor having at least one substrate disposed therein. At least part of the titanium halide-containing precursor is deposited onto the substrate(s) to form the Ti-containing film. The disclosed processes may further include one or more of the following aspects:

- introducing at least one reactant into the reactor;
- the reactant being plasma-treated;
- the reactant being remote plasma-treated;
- the reactant not being plasma-treated;
- the reactant being selected from the group consisting of H_2 , NH_3 , hydrazines (such as N_2H_4 , MeHNNH_2 , MeHNNHMe), organic amines (such as NMeH_2 , NEtH_2 , NMe_2H , NEt_2H , NMe_3 , NEt_3 , cyclic amines like pyrrolidine or pyrimidine), nitriles (such as acetonitrile), diamines (such as ethylene diamine, dimethylethylene diamine, tetramethylethylene diamine), aminoalcohols (such as ethanolamine [$\text{HO}-\text{CH}_2-\text{CH}_2-\text{NH}_2$], bis ethanolamine [$\text{HN}(\text{C}_2\text{H}_5\text{OH})_2$] or tris ethanolamine [$\text{N}(\text{C}_2\text{H}_5\text{OH})_3$]), pyrazoline, and pyridine;
- the reactant being selected from the group consisting of $(\text{SiH}_3)_3\text{N}$; $\text{N}(\text{SiH}_x\text{R}_{3-x})_3$, with each x independently 1-3 and each R independently alkyl or NR'_2 , with each R' independently H or C1-C4 alkyl (such as $(\text{H}_3\text{Si})_2\text{N}(\text{SiH}_2\text{NEt}_2)$, $(\text{H}_3\text{Si})_2\text{N}(\text{SiH}_2\text{N}i\text{Pr}_2)$, or $(\text{H}_3\text{Si})_2\text{N}(\text{SiH}_2i\text{Pr})$); $\text{R}_3\text{Si}-\text{NH}-\text{SiR}_3$, with each R independently H, Cl, Br, I, or a C1-C4 alkyl group (such as $\text{H}_3\text{Si}-\text{NH}-\text{SiH}_3$, $\text{H}_2\text{Si}-\text{NH}-\text{SiH}_3$, or $\text{Me}_3\text{Si}-\text{NH}-\text{SiMe}_3$); hydridosilanes (such as SiH_4 , Si_2H_6 , Si_3H_8 , Si_4H_{10} , Si_5H_{10} , Si_6H_{12}); chlorosilanes and chloropolysilanes (such as SiHCl_3 , SiH_2Cl_2 , SiH_3Cl , Si_2Cl_6 , Si_2HCl_5 , Si_3Cl_8); bromosilanes and bromopolysilanes (such as SiHBr_3 , SiH_2Br_2 , SiH_3Br , Si_2Br_6 , Si_2HBr_5 , Si_3Br_8); iodosilanes and iodopolysilanes (such as SiHI_3 , SiH_2I_2 , SiH_3I , Si_2I_6 , Si_2HI_5 , Si_3I_8); alkylsilanes (such as Me_2SiH_2 , Et_2SiH_2 , MeSiH_3 , EtSiH_3); and aminosilanes (such as tris(dimethylamino)silane, bis(diethylamino)silane, di-isopropylaminosilane and other mono, bis or tris aminosilanes); radicals thereof; or mixtures thereof

- the reactant being selected from the group consisting of NH_3 , $\text{N}(\text{SiH}_3)_3$, aminosilanes, and mixtures thereof;
- the reactant being selected from trialkylaluminum, dialkylaluminum halide, alkylaluminum halide, alkylamino and alkoxy derivatives of aluminum, alanes, amine-adducted alanes, and mixtures thereof;
- the reactant being NH_3 ;
- the reactant being selected from the group consisting of: O_2 , O_3 , H_2O , H_2O_2 , NO , N_2O , NO_2 , an alcohol, a diol (such as ethylene glycol), plasma activated oxygen radicals thereof, and mixtures thereof;
- the reactant being H_2O ;
- the reactant being O_2 ;
- the reactant being plasma treated O_2 ;
- the reactant being O_3 ;
- the reactant being selected from the group consisting of NH_3 , hydrazine and substituted hydrazines, amines such as primary amines (methylamine, ethylamine, isopropylamine, tertbutylamine), secondary amines (such as dimethylamine, diethylamine, ethylmethylamine, di-isopropylamine, pyrrolidine), or tertiary amines (such as triethylamine (TEA), trimethylamine (TMA));
- the reactant being NH_3 ;
- the reactant being hydrazine or substituted hydrazines;
- the reactant being primary amines, such as methylamine, ethylamine, isopropylamine, tertbutylamine;
- the reactant being secondary amines, such as dimethylamine, diethylamine, ethylmethylamine, bis-isopropylamine, pyrrolidine;
- the reactant being tertiary amines, such as TEA, TMA;
- the reactant being a Si-containing precursor;
- the Si-containing precursor being selected from the group consisting of SiH_4 , Si_2H_6 , Si_4H_8 , trisilylamine (TSA), and substituted TSA (substituted by alkyl, dialkylamine, halide);
- the Si-containing precursor being TSA;
- the Ti-containing film forming composition and the reactant being introduced into the reactor simultaneously;
- the reactor being configured for chemical vapor deposition;
- the reactor being configured for plasma enhanced chemical vapor deposition;

- the Ti-containing film forming composition and the reactant being introduced into the chamber sequentially;
- the reactor being configured for atomic layer deposition;
- the reactor being configured for plasma enhanced atomic layer deposition;
- 5 • the reactor being configured for spatial atomic layer deposition;
- liberating the adduct A from the Ti halide-containing precursor;
- the liberated adduct A forming a blocking agent;
- introducing a blocking agent into the reactor;
- the blocking agent being a self-assembling monolayer;
- 10 • the blocking agent being an inhibitor;
- the Ti-containing film being a titanium oxide (Ti_nO_m , wherein each n and m is an integer which inclusively range from 1 to 6);
- the Ti-containing film being TiO_2 ;
- the Ti-containing film being TiN ;
- 15 • the Ti-containing film being $TiSiN$;
- the Ti-containing film being TiM_iO_x , wherein i ranges from 0 to 1; x ranges from 1 to 6; and M is any element from the Periodic table;
- the Ti-containing film being TiM_iO_x , wherein i ranges from 0 to 1; x ranges from 1 to 6; and M is Si, Al, or Ge;
- 20 • the Ti-containing film being TiM_iN_y , wherein i ranges from 0 to 1; y ranges from 0.5 to 6; and M is any element from the Periodic table;
- the Ti-containing film being TiM_iN_y , wherein i ranges from 0 to 1; y ranges from 0.5 to 6; and M is Si, Al, or Ge;
- the Ti-containing film being $TiCN$;
- 25 • the Ti-containing film being $TiAl$;
- the Ti-containing film being $TiAlN$;
- the Ti-containing film being $TiM_iN_yO_x$, wherein i ranges from 0 to 1; x and y range from 1 to 6; and M is any element from the Periodic table;
- the Ti-containing film being $TiM_iN_yO_x$, wherein i ranges from 0 to 1; x and y range from 1 to 6; and M is Si, Al, or Ge;
- 30 • the Ti-containing film having a C concentration ranging from approximately 0 at% to 5 at%;
- the Ti-containing film having a O concentration ranging from approximately 0 at% to 40 at%;

- the Ti-containing film having a S concentration ranging from approximately 0 at% to 2 at%;
- the Ti-containing film having a Se concentration ranging from approximately 0 at% to 2 at%;
- 5 • the Ti-containing film having a Te concentration ranging from approximately 0 at% to 2 at%;
- the Ti-containing film having a P concentration ranging from approximately 0 at% to 2 at%;
- the TiN-containing film forming an electrode in a capacitor structure;
- 10 • the TiN-containing film forming a metal gate in a CMOS transistor or Flash memory;
- the TiN-containing film forming a buried word line;
- the Ti-containing film being a titanium silicide contact layer between conductive metal plugs and the underlying doped silicon layer in a CMOS transistor or
- 15 Flash memory;
- the Ti-containing film being selectively deposited onto a doped silicon layer but not a conductive metal plug; or
- the Ti-containing film being a titanium nitride layer selectively deposited on a tungsten layer to form a buried word line.

20

Notation and Nomenclature

Certain abbreviations, symbols, and terms are used throughout the following description and claims, and include:

As used herein, the indefinite article “a” or “an” means one or more.

25 As used herein, the terms “approximately” or “about” mean $\pm 10\%$ of the value stated.

As used herein, the term “independently” when used in the context of describing R groups should be understood to denote that the subject R group is not only independently selected relative to other R groups bearing the same or different

30 subscripts or superscripts, but is also independently selected relative to any additional species of that same R group. For example in the formula $MR^1_x(NR^2R^3)_{(4-x)}$, where x is 2 or 3, the two or three R^1 groups may, but need not be identical to each other or to R^2 or to R^3 . Further, it should be understood that unless specifically stated otherwise, values of R groups are independent of each other when used in different formulas.


As used herein, the term “adduct” means a molecular entity which is formed by direct combination of two separate molecule entities in such a way there is connectivity but no loss of atoms; the term “Lewis acid” means a molecular entity that is an electron-pair acceptor; the term “Lewis base” means a molecular entity able to provide a pair of electrons and thus coordinate to a Lewis acid; and the term “Lewis adduct” means an adduct formed between a Lewis acid and a Lewis base.

As used herein, the term “hydrocarbyl group” refers to a functional group containing carbon and hydrogen; the term “alkyl group” refers to saturated functional groups containing exclusively carbon and hydrogen atoms. The hydrocarbyl group may be saturated or unsaturated. Either term refers to linear, branched, or cyclic groups. Examples of linear alkyl groups include without limitation, methyl groups, ethyl groups, propyl groups, butyl groups, etc. Examples of branched alkyls groups include without limitation, t-butyl. Examples of cyclic alkyl groups include without limitation, cyclopropyl groups, cyclopentyl groups, cyclohexyl groups, etc.

As used herein, the abbreviation “Me” refers to a methyl group; the abbreviation “Et” refers to an ethyl group; the abbreviation “Pr” refers to a propyl group; the abbreviation “nPr” refers to a “normal” or linear propyl group; the abbreviation “iPr” refers to an isopropyl group; the abbreviation “Bu” refers to a butyl group; the abbreviation “nBu” refers to a “normal” or linear butyl group; the abbreviation “tBu” refers to a tert-butyl group, also known as 1,1-dimethylethyl; the abbreviation “sBu” refers to a sec-butyl group, also known as 1-methylpropyl; the abbreviation “iBu” refers to an iso-butyl group, also known as 2-methylpropyl; the term “amyl” refers to an amyl or pentyl group (i.e., a C₅ alkyl group); the term “tAmyl” refers to a tert-amyl group, also known as 1,1-dimethylpropyl; the term “halide” refers to the halogen anions F⁻, Cl⁻, Br⁻, and I⁻; and the abbreviation “TMS” refers to trimethylsilyl or –SiMe₃.

As used herein, the abbreviation “N^{R, R'} R”-amd” or N^R R”-amd when R=R' refers to the amidinate ligand [R-N-C(R'')=N-R'], wherein R, R' and R'' are defined alkyl groups, such as Me, Et, nPr, iPr, nBu, iBi, sBu or tBu; the abbreviation “N^{R, R'} R”-fmd” or N^R R”-fmd when R=R' refers to the formidinate ligand [R-N-C(H)=N-R'], wherein R and R' are defined alkyl groups, such as Me, Et, nPr, iPr, nBu, iBi, sBu or tBu; the abbreviation “N^{R, R', R''} R”-gnd” or N^{R, R'} R”-gnd when R=R' and R''=R''' refers to the guanidinate ligand [R-N-C(NR''R''')=NR'], wherein R, R', R'' and R''' are defined alkyl group such as Me, Et, nPr, iPr, nBu, iBi, sBu or tBu. Although depicted here as having a double bond between the C and N of the ligand backbone, one of ordinary skill in the art will recognize that the

amidinate, formidinate and guanidinate ligands do not contain a fixed double bond. Instead, one electron is delocalized amongst the N-C-N chain.

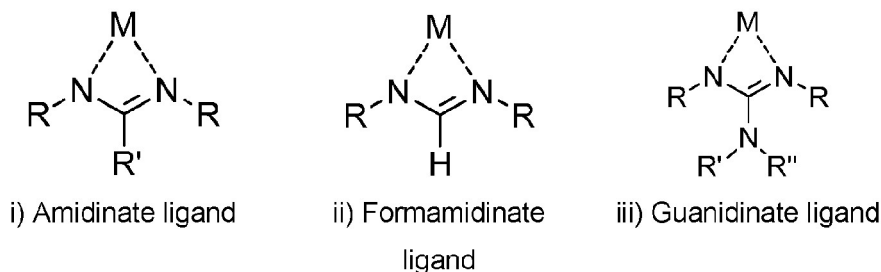

The standard abbreviations of the elements from the periodic table of elements are used herein. It should be understood that elements may be referred to by these abbreviations (e.g., Ti refers to titanium, Br refers to bromine, C refers to carbon, etc.). Additionally, Group 3 refers to Group 3 of the Periodic Table (i.e., Sc, Y, La, or Ac) and Group 5 refers to Group 5 of the Periodic Table (i.e., V, Nb, or Ta).

Any and all ranges recited herein are inclusive of their endpoints (i.e., $x=1$ to 4 or x ranges from 1 to 4 includes $x=1$, $x=4$, and x =any number in between), irrespective of whether the term “inclusively” is used.

As used herein, the term “selective” or “selectively” means to deposit a film on one type of substrate while not depositing a film on a second type of substrate or to preferentially grow a film faster on one type of substrate than on a second type of substrate. For example, the substrate may contain a tungsten plug or channel surrounded by a doped silicon dioxide. The disclosed Ti-containing film forming composition may deposit a Ti-containing film on the tungsten, but not on the surrounding silicon dioxide, or vice versa. Alternatively, during the same exposure period, the disclosed Ti-containing film forming composition may form a thicker film on one type of substrate than on another type of substrate. The thicker film may be due to a faster growth rate or shorter induction time. As a result, the disclosed Ti-containing film forming compositions selectively deposit a Ti-containing film on one substrate as compared to a second substrate.

Please note that the films or layers deposited, such as titanium oxide or titanium nitride, may be listed throughout the specification and claims without reference to their proper stoichiometry (i.e., TiO_2 , Ti_3N_4). The layers may include but are not limited to pure (Ti) layers, carbide (Ti_kC_p) layers, nitride (Ti_kN_l) layers, oxide (Ti_nO_m) layers, or mixtures thereof, wherein k , l , m , n , o , and p inclusively range from 1 to 6. For instance, titanium oxide is Ti_nO_m , wherein n ranges from 0.5 to 1.5 and m ranges from 1.5 to 3.5. More preferably, the titanium oxide layer is TiO_2 . These films may also contain Hydrogen,

typically from 0 at% to 15 at%. However, since not routinely measured, any film compositions given ignore their H content, unless explicitly stated otherwise.

Brief Description of the Figures

For a further understanding of the nature and objects of the present invention, reference should be made to the following detailed description, taken in conjunction with the accompanying figures wherein:

FIG. 1 is a side view of one embodiment of a liquid Ti-containing film forming composition delivery device **1**;

FIG. 2 is a side view of a second embodiment of the Ti-containing film forming composition delivery device **1**;

FIG 3 is an exemplary embodiment of a solid precursor sublimator **100** for subliming solid Ti-containing film forming compositions;

FIG 4 is the ^1H NMR spectrum of the $\text{TiBr}_4:\text{S}(\text{nPr})_2$ precursor produced in Example 1;

FIG 5 is a ThermoGravimetric Analysis/Differential Thermal Analysis (TGA/DTA) graph illustrating the percentage of weight loss (TGA) or the differential temperature (DTA) of $\text{TiBr}_4:\text{S}(\text{nPr})_2$ upon temperature increase;

FIG 6 is the ^1H NMR spectrum of the $\text{TiBr}_4:\text{SEtPr}$ precursor produced in Example 2;

FIG 7 is a TGA graph illustrating the percentage of weight loss of $\text{TiBr}_4:\text{SEtPr}$ upon temperature increase;

FIG 8 is a flow chart showing the process of Example 3;

FIG 9 is a schematic side view of the NH_2 terminated substrate produced by Step 1 of **FIG 8**;

FIG 10 is a schematic side view of the substrate at the start of Step 2 of **FIG 8**;

FIG 11 is a schematic side view of the reactions with the substrate and the reaction by-products produced by Step 2 of **FIG 8**;

FIG 12 is schematic side view of the substrate produced by Step 3 of **FIG 8**;

FIG 13 is a schematic side view of the substrate during Step 4 of **FIG 8**; and

FIG 14 is a graph showing the titanium nitride film growth rate and resulting titanium nitride film thickness per number of ALD cycles using the $\text{TiBr}_4:\text{S}(\text{nPr})_2$ precursor.

Description of Preferred Embodiments

Ti-containing film forming compositions are disclosed. The Ti-containing film forming compositions comprise Ti halide-containing precursors having one of the following formula:



with $b=3$ when $c=3$; $b=4$ when $c=1$ or 2 ; $y=1-3$; $z=1-3$; $y+z=4$; $X = \text{Br}$ or I ; $A = \text{SR}_2$, SeR_2 , TeR_2 , or PR_3 ; each R is independently H , a C1-C5 hydrocarbon, or SiR'_3 , with each R' independently being H or a C1-C5 hydrocarbon; and $R'' = \text{C1-C5}$ hydrocarbon. Preferably, $b=4$ and $c=1$ or 2 . However, in certain embodiments, the octahedral $\text{TiX}_3\text{:A}_3$ is the most stable embodiment.

Exemplary Ti halide-containing precursors having the formula $\text{TiX}_4\text{:A}_c$, with $c=1$ or 2 and $X = \text{Br}$ or I ; include $\text{TiX}_4\text{:SR}_2$, $\text{TiX}_4\text{:}(\text{SR}_2)_2$, $\text{TiX}_4\text{:SeR}_2$, $\text{TiX}_4\text{:}(\text{SeR}_2)_2$, $\text{TiX}_4\text{:TeR}_2$, or $\text{TiX}_4\text{:}(\text{TeR}_2)_2$, with each R independently a C1-C5 hydrocarbon. The Ti halide-containing precursor may be liquid when different R s are used (e.g., SEtPr). The different R groups may decrease intermolecular forces, resulting in lower melting points and viscosities than molecules that have the same R groups (i.e., SEtPr may have a lower melting point and viscosity than SEt_2 and/or SPr_2). The two R groups may also be linked to form a cyclic structure. When $c=2$, each R is preferably a smaller hydrocarbon ligand due to steric hindrance. For example, when $c=2$, each R may independently be a C1-2 hydrocarbon. In contrast, when $c=1$, the precursor enjoys less steric hindrance and each R may independently be a C3-C5 hydrocarbon.

When $X = \text{Br}$ and $A = \text{SR}_2$, exemplary $\text{TiX}_4\text{:A}_c$ precursors include $\text{TiBr}_4\text{:SEtPr}$, $\text{TiBr}_4\text{:SPr}_2$, $\text{TiBr}_4\text{:S(nPr)}_2$, $\text{TiBr}_4\text{:S(iPr)}_2$, $\text{TiBr}_4\text{:SBu}_2$, $\text{TiBr}_4\text{:S(nBu)}_2$, $\text{TiBr}_4\text{:S(tBu)}_2$, $\text{TiBr}_4\text{:S(iBu)}_2$, $\text{TiBr}_4\text{:S(sBu)}_2$, $\text{TiBr}_4\text{:}(\text{SMe}_2)_2$, $\text{TiBr}_4\text{:}(\text{SEt}_2)_2$, $\text{TiBr}_4\text{:}(\text{SMeEt})_2$, or $\text{TiBr}_4\text{:}(\text{tetrahydrothiophene})_2$.

$\text{TiBr}_4\text{:S(iBu)}_2$, $\text{TiBr}_4\text{:S(sBu)}_2$, $\text{TiBr}_4\text{:}(\text{SMe}_2)_2$, $\text{TiBr}_4\text{:}(\text{SEt}_2)_2$, $\text{TiBr}_4\text{:}(\text{SMeEt})_2$, or $\text{TiBr}_4\text{:}(\text{tetrahydrothiophene})_2$.

When $X = \text{I}$ and $A = \text{SR}_2$, exemplary $\text{TiX}_4\text{:A}_c$ precursors include $\text{TiI}_4\text{:SEtPr}$, $\text{TiI}_4\text{:S(nPr)}_2$, $\text{TiI}_4\text{:S(iPr)}_2$, $\text{TiI}_4\text{:SBu}_2$, $\text{TiI}_4\text{:S(nBu)}_2$, $\text{TiI}_4\text{:S(tBu)}_2$, $\text{TiI}_4\text{:S(iBu)}_2$, $\text{TiI}_4\text{:S(sBu)}_2$, $\text{TiI}_4\text{:}(\text{SEt}_2)_2$, $\text{TiI}_4\text{:}(\text{SMe}_2)_2$, $\text{TiI}_4\text{:}(\text{SMeEt})_2$, or $\text{TiI}_4\text{:}(\text{tetrahydrothiophene})_2$.

Exemplary $\text{TiX}_4\text{:}(\text{SeR}_2)_c$ precursors include $\text{TiBr}_4\text{:SeMePr}$, $\text{TiBr}_4\text{:SePr}_2$, $\text{TiBr}_4\text{:SeBu}_2$, $\text{TiBr}_4\text{:}(\text{SeMe}_2)_2$, $\text{TiBr}_4\text{:}(\text{SeEt}_2)_2$, $\text{TiBr}_4\text{:}(\text{SeMeEt})_2$, or $\text{TiBr}_4\text{:}(\text{tetrahydroselenophene})_2$.

Exemplary $\text{TiX}_4:(\text{TeR}_2)_c$ precursors include $\text{TiBr}_4:\text{TeMePr}$, $\text{TiBr}_4:\text{TePr}_2$, $\text{TiBr}_4:\text{TeBu}_2$, $\text{TiBr}_4:(\text{TeMe}_2)_2$, $\text{TiBr}_4:(\text{TeEt}_2)_2$, $\text{TiBr}_4:(\text{TeMeEt})_2$, or $\text{TiBr}_4:(\text{tetrahydrotellurophene})_2$.

These precursors may be prepared by direct reaction of the Ti halide with an excess of the ligand in any solvent. See, e.g., Fowles et al., Journal of the less common metals, 8, 1965, pp. 47-50. The halide starting material is commercially available. The SR_2 , SeR_2 , and TeR_2 starting material may be commercially available and/or synthesized by methods known in the literature. An exemplary synthesis method containing further details is provided in the Examples that follow.

Exemplary Ti halide-containing precursors having the formula $\text{TiX}_b:\text{A}_c$, with $b=3$ or 4, $c=1-3$, and $X = \text{Br}$ or I ; include $\text{TiX}_b:(\text{PR}_3)_c$ with each R independently H or a C1-C5 hydrocarbon. A may be $\text{PR}'\text{R}''$, with R not equal to R' and R'' . Adjacent R groups may also be linked to form a cyclic structure. When $c=2$, each R is preferably a smaller hydrocarbon ligand due to steric hindrance. For example, when $c=2$, each R may independently be H or a C1-2 hydrocarbon. In contrast, when $c=1$, the precursor enjoys less steric hindrance and each R may independently be a C3-C10 hydrocarbon. Exemplary $\text{TiX}_b:(\text{PR}_3)_c$ precursors include $\text{TiBr}_4:\text{PH}_3$, $\text{TiBr}_4:(\text{PH}_3)_2$, or $\text{TiBr}_3:(\text{PH}_3)_3$. These precursors may be prepared by direct reaction of the Ti halide with an excess of the PR_3 . See, e.g., R. Hölftje, Zeitschrift fuer Anorganische und Allgemeine Chemie, 1930, 190, pp 241-256.

Another exemplary Ti halide-containing precursor has the formula $\text{TiX}_4:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)$ or $\text{TiX}_3:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)_2$, with each R independently a C1-5 hydrocarbon and $n=1-4$. These precursors may be synthesized by direct reaction of the Ti halide with an excess of the $\text{R}_2\text{P}-\text{CH}_2-\text{PR}_2$. See, e.g., Fowles et al., Journal of the less common metals, 8, 1965, pp. 47-50. One of ordinary skill in the art will recognize that the $\text{R}_2\text{P}-\text{CH}_2-\text{PR}_2$ ligand may reduce Ti(IV) to Ti(III) . As a result, the Ti-containing film forming compositions may include a combination of both of the $\text{TiX}_4:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)$ and $\text{TiX}_3:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)_2$ precursors.

When $X=\text{Br}$, exemplary $\text{TiX}_4:(\text{R}_2\text{P}-(\text{CH}_2)_n-\text{PR}_2)$ precursors include $\text{TiBr}_4:(\text{Me}_2\text{P}-(\text{CH}_2)_n-\text{PMe}_2)$, $\text{TiBr}_4:(\text{EtMeP}-(\text{CH}_2)_n-\text{PMeEt})$, $\text{TiBr}_4:(\text{Et}_2\text{P}-(\text{CH}_2)_n-\text{PEt}_2)$, $\text{TiBr}_4:(\text{iPr}_2\text{P}-(\text{CH}_2)_n-\text{PiPr}_2)$, $\text{TiBr}_4:(\text{HiPrP}-(\text{CH}_2)_n-\text{PHiPr})$, $\text{TiBr}_4:(\text{tBu}_2\text{P}-(\text{CH}_2)_n-\text{PtBu}_2)$, $\text{TiBr}_4:(\text{tBuHP}-(\text{CH}_2)_n-\text{PHtBu})$, $\text{TiBr}_4:(\text{tAmHP}-(\text{CH}_2)_n-\text{PHtAm})$, $\text{TiBr}_4:(\text{Me}_2\text{P}-(\text{CH}_2)_2-\text{PMe}_2)$, $\text{TiBr}_4:(\text{EtMeP}-(\text{CH}_2)_2-\text{PMeEt})$, $\text{TiBr}_4:(\text{Et}_2\text{P}-(\text{CH}_2)_2-\text{PEt}_2)$, $\text{TiBr}_4:(\text{iPr}_2\text{P}-(\text{CH}_2)_2-\text{PiPr}_2)$, $\text{TiBr}_4:(\text{HiPrP}-(\text{CH}_2)_2-\text{PHiPr})$, $\text{TiBr}_4:(\text{tBu}_2\text{P}-(\text{CH}_2)_2-\text{PtBu}_2)$, $\text{TiBr}_4:(\text{tBuHP}-(\text{CH}_2)_2-\text{PHtBu})$, $\text{TiBr}_4:(\text{tAmHP}-(\text{CH}_2)_2-\text{PHtAm})$, $\text{TiBr}_4:(\text{Me}_2\text{P}-(\text{CH}_2)_2-\text{PMe}_2)$, $\text{TiBr}_4:(\text{EtMeP}-(\text{CH}_2)_2-\text{PMeEt})$, $\text{TiBr}_4:(\text{Et}_2\text{P}-(\text{CH}_2)_2-\text{PEt}_2)$.

PEt₂), TiBr₄:(iPr₂P-(CH₂)₂-PiPr₂), TiBr₄:(HiPrP-(CH₂)₂-PHiPr), TiBr₄:(tBu₂P-(CH₂)₂-PtBu₂), TiBr₄:(tBuHP-(CH₂)₂-PHtBu), or TiBr₄:(tAmHP-(CH₂)₂-PHtAm).

Exemplary TiX₃:(R₂P-(CH₂)_n-PR₂) precursors include TiBr₃:(Me₂P-(CH₂)_n-PMe₂), TiBr₃:(EtMeP-(CH₂)_n-PMeEt), TiBr₃:(Et₂P-(CH₂)_n-PEt₂), TiBr₃:(iPr₂P-(CH₂)_n-PiPr₂), TiBr₃:(HiPrP-(CH₂)_n-PHiPr), TiBr₃:(tBu₂P-(CH₂)_n-PtBu₂), TiBr₃:(tBuHP-(CH₂)_n-PHtBu), TiBr₃:(tAmHP-(CH₂)_n-PHtAm), TiBr₃:(Me₂P-(CH₂)₂-PMe₂), TiBr₃:(EtMeP-(CH₂)₂-PMeEt), TiBr₃:(Et₂P-(CH₂)₂-PEt₂), TiBr₃:(iPr₂P-(CH₂)₂-PiPr₂), TiBr₃:(HiPrP-(CH₂)₂-PHiPr), TiBr₃:(tBu₂P-(CH₂)₂-PtBu₂), TiBr₃:(tBuHP-(CH₂)₂-PHtBu), or TiBr₃:(tAmHP-(CH₂)₂-PHtAm).

When X=I, exemplary TiX₄:(R₂P-(CH₂)_n-PR₂) precursors include TiI₄:(Me₂P-(CH₂)_n-PMe₂), TiI₄:(EtMeP-(CH₂)_n-PMeEt), TiI₄:(Et₂P-(CH₂)_n-PEt₂), TiI₄:(iPr₂P-(CH₂)_n-PiPr₂), TiI₄:(HiPrP-(CH₂)_n-PHiPr), TiI₄:(tBu₂P-(CH₂)_n-PtBu₂), TiI₄:(tBuHP-(CH₂)_n-PHtBu), TiI₄:(tAmHP-(CH₂)_n-PHtAm), TiI₄:(Me₂P-(CH₂)₂-PMe₂), TiI₄:(EtMeP-(CH₂)₂-PMeEt), TiI₄:(Et₂P-(CH₂)₂-PEt₂), TiI₄:(iPr₂P-(CH₂)₂-PiPr₂), TiI₄:(HiPrP-(CH₂)₂-PHiPr), TiI₄:(tBu₂P-(CH₂)₂-PtBu₂), TiI₄:(tBuHP-(CH₂)₂-PHtBu), or TiI₄:(tAmHP-(CH₂)₂-PHtAm).

Exemplary TiX₃:(R₂P-(CH₂)_n-PR₂) precursors include TiI₃:(Me₂P-(CH₂)_n-PMe₂), TiI₃:(EtMeP-(CH₂)_n-PMeEt), TiI₃:(Et₂P-(CH₂)_n-PEt₂), TiI₃:(iPr₂P-(CH₂)_n-PiPr₂), TiI₃:(HiPrP-(CH₂)_n-PHiPr), TiI₃:(tBu₂P-(CH₂)_n-PtBu₂), TiI₃:(tBuHP-(CH₂)_n-PHtBu), TiI₃:(tAmHP-(CH₂)_n-PHtAm), TiI₃:(Me₂P-(CH₂)₂-PMe₂), TiI₃:(EtMeP-(CH₂)₂-PMeEt), TiI₃:(Et₂P-(CH₂)₂-PEt₂), TiI₃:(iPr₂P-(CH₂)₂-PiPr₂), TiI₃:(HiPrP-(CH₂)₂-PHiPr), TiI₃:(tBu₂P-(CH₂)₂-PtBu₂), TiI₃:(tBuHP-(CH₂)₂-PHtBu), or TiI₃:(tAmHP-(CH₂)₂-PHtAm).

Exemplary Ti halide-containing precursors having the formula TiX₄:A_c, with c=1 and X = Br or I; include TiX₄:(R(=O)Cl), with R being a C2-C6 hydrocarbon. Exemplary TiX₄:(R(=O)Cl) precursors include TiBr₄:(Me-C(=O)Cl), TiBr₄:(Ph-C(=O)Cl), or TiI₄:(Me-C(=O)Cl). These precursors may be prepared by direct reaction of the Ti halide with an excess of the ligand without solvent or in CCl₄, benzene, toluene. See e.g. Emeléus et

al., Complexes of Titanium and Zirconium Halides with Organic Ligands, J. Chemical Society (Resumed), 1958, pp.4245-50.

Exemplary Ti halide-containing precursors having the formula $TiX_4:A_c$, with $c=1$ and $X = Br$ or I ; include $TiX_4:(RNO_2)$, with R being a C1-C10 hydrocarbon. Exemplary $TiX_4:(RNO_2)$ precursors include $TiBr_4:(MeNO_2)$, $TiI_4:(MeNO_2)$, $TiBr_4:(EtNO_2)$, $TiBr_4:(PrNO_2)$, or $TiBr_4:(PhNO_2)$. These precursors may be prepared by direct reaction of the Ti halide with an excess of the ligand without solvent or in CCl_4 , benzene, toluene. See e.g. Emeléus et al., Complexes of Titanium and Zirconium Halides with Organic Ligands, J. Chemical Society (Resumed), 1958, pp.4245-50.

Exemplary Ti halide-containing precursors having the formula $TiX_4:A_c$, with $c=2$ and $X = Br$ or I ; include $TiX_4:(R\equiv N)_2$, with R being a C2-C10 hydrocarbon. Exemplary $TiX_4:(R\equiv N)_c$ precursors include $TiBr_4:(Me-C\equiv N)_2$, $TiBr_4:(Et-C\equiv N)_2$, $TiBr_4:(Pr-C\equiv N)_2$, $TiBr_4:(Bu-C\equiv N)_2$, or $TiBr_4:(Ph-C\equiv N)_2$. These precursors may be prepared by direct reaction of the Ti halide with an excess of the ligand without solvent or in CCl_4 , benzene, toluene. See e.g. Emeléus et al., Complexes of Titanium and Zirconium Halides with Organic Ligands, J. Chemical Society (Resumed), 1958, pp.4245-50.

Exemplary Ti halide-containing precursors having the formula $TiX_4:A_c$, with $c=1$ or 2 and $X = Br$ or I ; include $TiX_4:(pyridine)_c$. Exemplary $TiX_4:(pyridine)_c$ precursors include $TiBr_4:pyridine$. These precursors may be prepared by direct reaction of the Ti halide with an excess of the ligand without solvent or in CCl_4 , benzene, toluene. See e.g. Emeléus et al., Complexes of Titanium and Zirconium Halides with Organic Ligands, J. Chemical Society (Resumed), 1958, pp.4245-50.

Exemplary Ti halide-containing precursors having the formula $TiX_4:A_c$, with $c=1$ or 2 and $X = Br$ or I ; include $TiX_4:(piperidine)_c$. Exemplary $TiX_4:(piperidine)_c$ precursors include $TiBr_4:piperidine$ or $TiBr_4:2,2,6,6\text{-tetramethylpiperidine}$. These precursors may be synthesized by direct reaction of the Ti halide with an excess of the ligand in benzene or toluene. See e.g. Dermer et al. in Zeitschrift fuer Anorganische und Allgemeine Chemie (1934) 221 pp. 83-96.

Exemplary Ti halide-containing precursors having the formula $Ti(NR_2)_y(X)_z$, with $y=1-3$, $z=1-3$, $y+z=4$, $X = Br$ or I , and each R independently H, a C1-C10 hydrocarbon, or SiR'_3 , with each R' independently being H or a C1-C10 hydrocarbon include $TiX_3(NR_2)$, $TiX_2(NR_2)_2$, or $TiX(NR_2)_3$. The two R groups may be linked to form a cyclic structure.

Exemplary $TiX_3(NR_2)$ precursors include $TiBr_3(NR_2)$ and $TiI_3(NR_2)$, such as $TiBr_3(NEt_2)$, $TiBr_3(pyrrolidine)$, $TiBr_3(pyridine)$, or $TiBr_3(piperidine)$. These precursors

may be synthesized by reaction of TiX_4 with $Me_3Si(NR_2)$ as described by Buerger et al., *Zeitschrift fuer Anorganische und Allgemeine Chemie*, 370 (5-6), 1969, pp. 275-282.

Exemplary $TiX_2(NR_2)_2$ precursors include $TiBr_2(NR_2)_2$ and $TiI_2(NR_2)_2$, such as $TiBr_2(NMe_2)_2$. These precursors may be synthesized by metathesis of TiX_4 with $Ti(NR_2)_4$ as described by Buerger et al., *Zeitschrift fuer Anorganische und Allgemeine Chemie*, 370 (5-6), 1969, pp. 275-282.

Exemplary $TiX(NR_2)_3$ precursors include $TiBr(NR_2)_3$ and $TiI(NR_2)_3$. These precursors may be synthesized by reaction of TiX_4 with $Ti(NR_2)_4$ as described by Buerger et al., *Zeitschrift fuer Anorganische und Allgemeine Chemie*, 370 (5-6), 1969, pp. 275-282.

Exemplary Ti halide-containing precursors having the formula $Ti(-N-R''-N-)_y(X)_z$, with $y=1-3$, $z=1-3$, $y+z=4$, $X = Br$ or I , and R'' a C1-C10 hydrocarbon, include $TiBr_3(N^{iPr}-fmd)$, $TiBr_3(N^{iPr}-Me-amd)$, or $TiBr_2(-N(R)-C_2H_4-N(R)-)_2$. These precursors may be synthesized by reaction of $TiBr_4$ or TiI_4 and trimethylsilyl derivative of amidinate ligand (e.g. $TiBr_4$ and $TMS-N^{iPr}-Me-amd$). Exemplary synthesis methods are described for titanium chloride complexes in D. Fenske et al. *Z. Naturforsch.* 43b, 1611-1615 (1988); D. Liguori et al., *Macromolecules* 2003, 36, 5451-5458.

One of ordinary skill in the art will recognize the sources for the equipment used to practice the disclosed synthesis methods. Some level of customization of the components may be required based upon the desired temperature range, pressure range, local regulations, etc. Exemplary equipment suppliers include Buchi Glass Uster AG, Shandong ChemSta Machinery Manufacturing Co. Ltd., Jiangsu Shajiang Chemical Equipment Co. Ltd, etc.

To ensure process reliability, the Ti-containing film forming compositions may be purified by continuous or fractional batch distillation or sublimation prior to use to a purity ranging from approximately 93% w/w to approximately 100% w/w, preferably ranging from approximately 99% w/w to approximately 100% w/w. The Ti-containing film forming compositions may contain any of the following impurities: undesired congeneric species; excess adduct; hydrogen halides (HX); solvents; halogenated metal compounds (TiX); or other reaction products. In one alternative, the total quantity of these impurities is below 0.1% w/w.

High purity product may be obtained by using high purity reactants. For example, the SR_2 adduct may contain traces of SR'_2 , wherein $R \neq R'$. Preferably, the Ti-containing film forming composition comprises between approximately 0 % w/w and 0.2% w/w of $TiX_b:(SR'_2)_c$, wherein $R' \neq R$. The SR'_2 levels may be analyzed in either the starting material or finished product using GC and/or NMR.

The Ti-containing film forming compositions should contain no water because the molecules will hydrolyze (e.g., between approximately 0 % w/w and 5 ppm of H₂O). Any water present in the Ti-containing film forming compositions may result in formation of undesired oxyhalides (TiBr₂(=O) or TiI₂(=O)), hydroxyhalides (TiBr₃(OH) or TiI₃(OH)), and oxides (TiO₂). The total amount of the combination of these three impurities in the Ti-containing film forming composition should be less than 0.2% w/w, and preferably less than 0.1% w/w. These impurities may be detected using NMR, FTIR, TGA, or combinations thereof.

The amount of hydrogen halide (i.e., HBr or HI) reaction by-product should also be minimized because it may react with components in the delivery lines and deposition chamber. HX may also be detrimental to the underlying substrate. The Ti-containing film forming compositions should contain less than 0.1% w/w and preferably less than 0.01% w/w of any HX by-products. These impurities may be detected using FTIR and/or GC.

The concentration of each of hexane, pentane, dimethyl ether, or anisole in the purified Ti-containing film forming compositions may range from approximately 0% w/w to approximately 5% w/w, preferably from approximately 0% w/w to approximately 0.1% w/w. Solvents may be used in the composition's synthesis. Separation of the solvents from the precursor may be difficult if both have similar boiling points. Cooling the mixture may produce solid precursor in liquid solvent, which may be separated by filtration. Vacuum distillation may also be used, provided the precursor reaction product is not heated above approximately its decomposition point.

In one alternative, the disclosed Ti-containing film forming compositions contain less than 5% v/v, preferably less than 1% v/v, more preferably less than 0.1% v/v, and even more preferably less than 0.01% v/v of any of its undesired congeneric species, reactants, or other reaction products. This alternative may provide better process repeatability. This alternative may be produced by distillation of the Ti-containing precursors.

In another alternative, the disclosed Ti-containing film forming compositions may contain between 5% v/v and 50% v/v of one or more congeneric Ti halide-containing precursors, reactants, or other reaction products, particularly when the mixture provides improved process parameters or isolation of the target compound is too difficult or expensive. For example, a mixture of two Ti halide-containing precursors, such as TiBr₄:(iPr₂P-(CH₂)-PiPr₂) and TiBr₃:(iPr₂P-(CH₂)-PiPr₂), may produce a stable, liquid mixture suitable for vapor deposition.

The concentration of trace metals and metalloids in the purified Ti-containing film forming compositions may each range from approximately 0 ppm to approximately 5 ppm, preferably from approximately 0 ppm to approximately 1 ppm, and more preferably from approximately 0 ppb to approximately 500 ppb. These metal impurities include, but are not limited to, Aluminum (Al), Silver (Ag), Arsenic (As), Barium (Ba), Beryllium (Be), Bismuth (Bi), Cadmium (Cd), Calcium (Ca), Chromium (Cr), Cobalt (Co), Copper (Cu), Gallium (Ga), Germanium (Ge), Hafnium (Hf), Indium (In), Iron (Fe), Lead (Pb), Lithium (Li), Magnesium (Mg), Manganese (Mn), Tungsten (W), Nickel (Ni), Potassium (K), Sodium (Na), Strontium (Sr), Thorium (Th), Tin (Sn), Uranium (U), Vanadium (V), Zinc (Zn), and Zirconium (Zr).

The benefit of the disclosed precursors is a reduced melting point when compared to their TiX_4 analogs. For titanium iodide-containing precursors, the Ti halide-containing precursor may have a melting point between approximately $-50^{\circ}C$ and approximately $150^{\circ}C$ at standard temperature and pressure, preferably between approximately $-50^{\circ}C$ and approximately $30^{\circ}C$ at standard temperature pressure. For titanium bromide-containing precursors, the Ti halide-containing precursor may have a melting point between approximately $-50^{\circ}C$ and approximately $39^{\circ}C$ at standard temperature and pressure. Preferably, the Ti halide-containing precursor is a liquid at standard temperature and pressure because the reproducible and stable production of vapor from solid precursors is challenging at best. Solid precursors may be dissolved in a solvent and the solution vaporized, but that may introduce impermissible contamination issues from the solvent into the resulting film. Alternatively, a sublimator may be used to produce vapors from solid materials directly, but the grain size, solid distribution in the sublimator, and vapor pressure of the solid itself make it very difficult to provide a consistent and reproducible concentration of the vapor to the semiconductor process.

Applicants also expect that the Ti-adduct bonds will break at the deposition temperature. As a result, no film contamination is expected from inclusion of the adduct in the Ti halide-containing precursor. As such, these precursors should behave as $TiBr_4$ and TiI_4 , but be easier to handle and use owing to their lower melting point. The disclosed Ti halide-containing precursor are also better than $TiCl_4$ due to a lower deposition temperature and the absence of highly corrosive Cl.

Finally, Applicants believe that the disclosed Ti-containing film forming compositions may be more stable and less hydrolysable than the analogous chloride containing compositions. The disclosed Ti-containing film forming compositions may also exhibit less etching damage to the substrate and reactor than the analogous chloride

containing compositions. Testing was performed using the $\text{TiBr}_4\text{-S(nPr)}_2$ molecules and no substrate damage was evident on Al_2O_3 , HfO_2 , Nb_2O_5 , SiO_2 , or ZrO_2 films at 300°C, 350°C, 400°C, or 450°C. This is somewhat surprising because HBr is more acidic than HCl (pKa HCl = -7, pKa HBr = -9, and pKa HI = -10).

5 The Ti-containing film forming compositions may exhibit (i) sufficient volatility to provide a rapid and reproducible delivery into the reaction chamber from the vessel in which they are stored, (ii) high thermal stability to avoid decomposition during the storage in the canister and to enable self-limiting growth in ALD mode at high temperature, typically >150°C for dielectric films and > 275°C for conductive films, (iii) appropriate
10 reactivity toward the substrate terminal functions and with the reacting gas to an easy conversion into the desired film, and (iv) high purity to obtain a film with low impurities.

 Also disclosed are methods for forming Ti-containing layers on a substrate using a vapor deposition process. The method may be useful in the manufacture of semiconductor, photovoltaic, LCD-TFT, or flat panel type devices. The disclosed Ti-
15 containing film forming compositions may be used to deposit thin Ti-containing films using any deposition methods known to those of skill in the art. Examples of suitable vapor deposition methods include chemical vapor deposition (CVD) or atomic layer deposition (ALD). Exemplary CVD methods include thermal CVD, plasma enhanced CVD (PECVD), pulsed CVD (PCVD), low pressure CVD (LPCVD), sub-atmospheric CVD
20 (SACVD) or atmospheric pressure CVD (APCVD), hot-wire CVD (HWCVD, also known as cat-CVD, in which a hot wire serves as an energy source for the deposition process), radicals incorporated CVD, and combinations thereof. Exemplary ALD methods include thermal ALD, plasma enhanced ALD (PEALD), spatial isolation ALD, hot-wire ALD (HWALD), radicals incorporated ALD, and combinations thereof. Super critical fluid
25 deposition may also be used. The deposition method is preferably ALD, spatial ALD, or PE-ALD to provide suitable step coverage and film thickness control. The disclosed Ti-containing film forming compositions are particularly suitable for ALD processes because their thermal stability enables perfect self-limited growth.

 The disclosed Ti-containing film forming composition may be supplied either neat
30 or may further comprise a suitable solvent, such as C1-C16 hydrocarbons, C1-C16 halogenated hydrocarbons, ketones, ethers, glymes, esters, tetrahydrofurans, dimethyl oxalate (DMO), and combinations thereof. The C1-C16 hydrocarbons and the C1-C16 halogenated hydrocarbons may be saturated or unsaturated. Exemplary solvents include but are not limited to tetrahydrofuran, DMO, ethyl benzene, xylene, mesitylene,
35 decane, and/or dodecane. The adduct may also be used as a solvent when the Ti-

containing film forming composition is introduced into the reactor via direct liquid injection. One of ordinary skill in the art will recognize that the adduct is not a suitable solvent for bubblers because it will evaporate prior to vaporization of the Ti halide-containing precursor (i.e., there will be no vapor of the Ti halide-containing precursor in the vapor of the adduct solvent when introduced into the reactor via bubbler due to the differences in vapor pressure between the two). The disclosed Ti halide-containing precursors may be present in varying concentrations in the solvent. The difference between the boiling point of the Ti-halide containing precursor and that of the solvent should range from approximately 0°C to approximately 80°C.

While the precursors are ideally liquids and vaporized in bubblers or direct liquid injection systems, the use of solid precursors for ALD and CVD precursor vaporization is also possible using sublimators such as ones disclosed in PCT Publication WO2009/087609 to Xu et al. Alternatively, solid precursors may be mixed or dissolved in a solvent to reach a usable melting point and viscosity for usage by Direct Liquid Injection systems.

The neat or blended Ti-containing film forming compositions are introduced into a reactor in vapor form by conventional means, such as tubing and/or flow meters. The vapor form may be produced by vaporizing the neat or blended composition through a conventional vaporization step such as direct vaporization, distillation, or by bubbling, or by using a sublimator such as the one disclosed in PCT Publication WO2009/087609 to Xu et al. The composition may be fed in a liquid state to a vaporizer where it is vaporized before it is introduced into the reactor. Alternatively, the composition may be vaporized by passing a carrier gas into a container containing the compound or by bubbling the carrier gas into the compound. The carrier gas may include, but is not limited to, Ar, He, N₂, and mixtures thereof. Bubbling with a carrier gas may also remove any dissolved oxygen present in the neat or blended compound solution. The carrier gas and vapor form of the composition are then introduced into the reactor as a vapor.

If necessary, the container may be heated to a temperature that permits the composition to be in its liquid phase and to have a sufficient vapor pressure. The container may be maintained at temperatures in the range of, for example, approximately 50°C to approximately 180°C. Those skilled in the art recognize that the temperature of the container may be adjusted in a known manner to control the amount of composition vaporized. Preferably, the container is maintained at a temperature that results in the Ti-containing film forming composition having a viscosity ranging from approximately 1 to approximately 50 cps, preferably between approximately 1 to approximately 20 cps.

Such viscosities make the Ti-containing film forming compositions suitable for introduction into the reactor using direct liquid injection.

The Ti-containing film forming compositions may be delivered to a semiconductor processing tool by the disclosed Ti-containing film forming composition delivery devices.

5 **FIGS. 1 and 2** show two embodiments of the disclosed delivery devices **1**.

FIG. 1 is a side view of one embodiment of the Ti-containing film forming composition delivery device **1**. In **FIG. 1**, the disclosed Ti-containing film forming composition **11** is contained within a container **2** having at least two conduits, an inlet conduit **3** and an outlet conduit **4**. One of ordinary skill in the precursor art will recognize
10 that the container **2**, inlet conduit **3**, and outlet conduit **4** are manufactured to prevent the escape of the gaseous form of the Ti-containing film forming composition **11**, even at elevated temperature and pressure.

Suitable valves include spring-loaded or tied diaphragm valves. The valve may further comprise a restrictive flow orifice (RFO). The delivery device **1** should be
15 connected to a gas manifold and in an enclosure. The gas manifold should permit the safe evacuation and purging of the piping that may be exposed to air when the delivery device **1** is replaced so that any residual amount of the material does not react.

The delivery device **1** must be leak tight and be equipped with valves that do not permit escape of even minute amounts of the material when closed. The delivery device
20 **1** fluidly connects to other components of the semiconductor processing tool, such as the gas cabinet disclosed above, via valves **6** and **7**. Preferably, the container **2**, inlet conduit **3**, valve **6**, outlet conduit **4**, and valve **7** are typically made of 316L EP stainless steel.

In **FIG. 1**, the end **8** of inlet conduit **3** is located above the surface of the Ti-containing film forming composition **11**, whereas the end **9** of the outlet conduit **4** is
25 located below the surface of the Ti-containing film forming composition **11**. In this embodiment, the Ti-containing film forming composition **11** is preferably in liquid form. An inert gas, including but not limited to nitrogen, argon, helium, and mixtures thereof, may be introduced into the inlet conduit **3**. The inert gas pressurizes the container **2** so
30 that the liquid Ti-containing film forming composition **11** is forced through the outlet conduit **4** and to components in the semiconductor processing tool (not shown). The semiconductor processing tool may include a vaporizer which transforms the liquid Ti-containing film forming composition **11** into a vapor, with or without the use of a carrier gas such as helium, argon, nitrogen or mixtures thereof, in order to deliver the vapor to
35 a chamber where a wafer to be repaired is located and treatment occurs in the vapor

phase. Alternatively, the liquid Ti-containing film forming composition **11** may be delivered directly to the wafer surface as a jet or aerosol.

FIG. 2 is a side view of a second embodiment of the Ti-containing film forming composition delivery device **1**. In **FIG. 2**, the end **8** of inlet conduit **3** is located below the surface of the Ti-containing film forming composition **11**, whereas the end **9** of the outlet conduit **4** is located above the surface of the Ti-containing film forming composition **11**. **FIG. 2** also includes an optional heating element **14**, which may increase the temperature of the Ti-containing film forming composition **11**. The Ti-containing film forming composition **11** may be in solid or liquid form. An inert gas, including but not limited to nitrogen, argon, helium, and mixtures thereof, is introduced into the inlet conduit **3**. The inert gas flows through the Ti-containing film forming composition **11** and carries a mixture of the inert gas and vaporized Ti-containing film forming composition **11** to the outlet conduit **4** and to the components in the semiconductor processing tool.

Both **FIGS 1 and 2** include valves **6** and **7**. One of ordinary skill in the art will recognize that valves **6** and **7** may be placed in an open or closed position to allow flow through conduits **3** and **4**, respectively. In another alternative, the inlet conduit **3** and outlet conduit **4** may both be located above the surface of the Ti-containing film forming composition **11** without departing from the disclosure herein. Furthermore, inlet conduit **3** may be a filling port.

In another alternative, either delivery device **1** in **FIGS. 1 or 2**, or a simpler delivery device having a single conduit terminating above the surface of any solid or liquid present, may be used if the Ti-containing film forming composition **11** is in vapor form or if sufficient vapor pressure is present above the solid/liquid phase. In this case, the Ti-containing film forming composition **11** is delivered in vapor form through the conduit **3** or **4** simply by opening the valve **6** in **FIG. 1** or **7** in **FIG. 2**, respectively. The delivery device **1** may be maintained at a suitable temperature to provide sufficient vapor pressure for the Ti-containing film forming composition **11** to be delivered in vapor form, for example by the use of an optional heating element **14**.

When the Ti-containing film forming compositions are solids, their vapors may be delivered to the reactor using a sublimator. **FIG 3** shows one embodiment of a suitable sublimator **100**. The sublimator **100** comprises a container **33**. Container **33** may be a cylindrical container, or alternatively, may be any shape, without limitation. The container **33** is constructed of materials such as stainless steel, nickel and its alloys, quartz, glass, and other chemically compatible materials, without limitation. In certain instances, the container **33** is constructed of another metal or metal alloy, without limitation. In certain

instances, the container **33** has an internal diameter from about 8 centimeters to about 55 centimeters and, alternatively, an internal diameter from about 8 centimeters to about 30 centimeters. As understood by one skilled in the art, alternate configurations may have different dimensions.

5 Container **33** comprises a sealable top **15**, sealing member **18**, and gasket **20**. Sealable top **15** is configured to seal container **33** from the outer environment. Sealable top **15** is configured to allow access to the container **33**. Additionally, sealable top **15** is configured for passage of conduits into container **33**. Alternatively, sealable top **15** is configured to permit fluid flow into container **33**. Sealable top **15** is configured to receive
10 and pass through a conduit comprising a dip tube **92** to remain in fluid contact with container **33**. Dip tube **92** having a control valve **90** and a fitting **95** is configured for flowing carrier gas into container **33**. In certain instances, dip tube **92** extends down the center axis of container **33**. Further, sealable top **15** is configured to receive and pass through a conduit comprising outlet tube **12**. The carrier gas and vapor of the Ti-
15 containing film forming composition is removed from container **33** through the outlet tube **12**. Outlet tube **12** comprises a control valve **10** and fitting **5**. In certain instances, outlet tube **12** is fluidly coupled to a gas delivery manifold, for conducting carrier gas from the sublimator **100** to a film deposition chamber.

Container **33** and sealable top **15** are sealed by at least two sealing members **18**;
20 alternatively, by at least about four sealing members. In certain instance, sealable top **15** is sealed to container **33** by at least about eight sealing members **18**. As understood by one skilled in the art, sealing member **18** releasably couples sealable top **15** to container **33**, and forms a gas resistant seal with gasket **20**. Sealing member **18** may comprise any suitable means known to one skilled in the art for sealing container **33**. In
25 certain instances, sealing member **18** comprises a thumbscrew.

As illustrated in **FIG 3**, container **33** further comprises at least one disk disposed therein. The disk comprises a shelf, or horizontal support, for solid material. In certain embodiments, an interior disk **30** is disposed annularly within the container **33**, such that the disk **30** includes an outer diameter or circumference that is less than the inner
30 diameter or circumference of the container **33**, forming an opening **31**. An exterior disk **86** is disposed circumferentially within the container **33**, such that the disk **86** comprises an outer diameter or circumference that is the same, about the same, or generally coincides with the inner diameter of the container **33**. Exterior disk **86** forms an opening **87** disposed at the center of the disk. A plurality of disks is disposed within container **33**.
35 The disks are stacked in an alternating fashion, wherein interior disks **30**, **34**, **36**, **44** are

vertically stacked within the container with alternating exterior disks **62, 78, 82, 86**. In embodiments, interior disks **30, 34, 36, 44** extend annularly outward, and exterior disks **62, 78, 82, 86** extend annularly toward the center of container **33**. As illustrated in the embodiment of **FIG 3**, interior disks **30, 34, 36, 44** are not in physical contact with exterior disks **62, 78, 82, 86**.

The assembled sublimator **100** comprises interior disks **30, 34, 36, 44** comprising aligned and coupled support legs **50**, interior passage **51**, concentric walls **40, 41, 42**, and concentric slots **47, 48, 49**. The interior disks **30, 34, 36, 44** are vertically stacked, and annularly oriented about the dip tube **92**. Additionally, the sublimator comprises exterior disks **62, 78, 82, 86**. As illustrated in **FIG 3**, the exterior disks **62, 78, 82, 86** should be tightly fit into the container **33** for a good contact for conducting heat from the container **33** to the disks **62, 78, 82, 86**. Preferably, the exterior disks **62, 78, 82, 86** are coupled to, or in physical contact with, the inner wall of the container **33**.

As illustrated, exterior disks **62, 78, 82, 86** and interior disks **30, 34, 36, 44** are stacked inside the container **33**. When assembled in container **33** to form sublimator **100**, the interior disks **30, 34, 36, 44** form outer gas passages **31, 35, 37, 45** between the assembled exterior disks **62, 78, 82, 86**. Further, exterior disks **62, 78, 82, 86** form inner gas passages **56, 79, 83, 87** with the support legs of the interior disks **30, 34, 36, 44**. The walls **40, 41, 42** of interior disks **30, 34, 36, 44** form the grooved slots for holding solid precursors. Exterior disks **62, 78, 82, 86** comprise walls **68, 69, 70** for holding solid precursors. During assembly, the solid precursors are loaded into the annular slots **47, 48, 49** of interior disks **30, 34, 36, 44** and annular slots **64, 65, 66** of exterior disks **62, 78, 82, 86**.

While **FIG 3** discloses one embodiment of a sublimator capable of delivering the vapor of any solid Ti-containing film forming composition to the reactor, one of ordinary skill in the art will recognize that other sublimator designs may also be suitable, without departing from the teachings herein. Finally, one of ordinary skill in the art will recognize that the disclosed Ti-containing film forming composition **11** may be delivered to semiconductor processing tools using other delivery devices, such as the ampoules disclosed in WO 2006/059187 to Jurcik *et al.*, without departing from the teachings herein.

The reaction chamber may be any enclosure or chamber of a device in which deposition methods take place, such as, without limitation, a parallel-plate type reactor, a cold-wall type reactor, a hot-wall type reactor, a single-wafer reactor, a multi-wafer reactor, or other such types of deposition systems. All of these exemplary reaction

chambers are capable of serving as an ALD reaction chamber. The reaction chamber may be maintained at a pressure ranging from about 0.5 mTorr to about 20 Torr, preferably between about 0.1 Torr and about 5 Torr. In addition, the temperature within the reaction chamber may range from about 50°C to about 600°C. One of ordinary skill in the art will recognize that the optimal deposition temperature range for each Ti halide-containing precursors may be determined experimentally to achieve the desired result.

The reactor contains one or more substrates onto which the thin films will be deposited. A substrate is generally defined as the material on which a process is conducted. The substrates may be any suitable substrate used in semiconductor, photovoltaic, flat panel, or LCD-TFT device manufacturing. Examples of suitable substrates include wafers, such as silicon, SiGe, silica, glass, or Ge. Plastic substrates, such as poly(3,4-ethylenedioxythiophene)poly (styrenesulfonate) [PEDOT:PSS], may also be used. The substrate may also have one or more layers of differing materials already deposited upon it from a previous manufacturing step. For example, the wafers may include silicon layers (crystalline, amorphous, porous, etc.), silicon oxide layers, silicon nitride layers, silicon oxy nitride layers, carbon doped silicon oxide (SiCOH) layers, or combinations thereof. Additionally, the wafers may include copper, cobalt, ruthenium, tungsten and/or other metal layers (e.g. platinum, palladium, nickel, ruthenium, or gold). The wafers may include barrier layers or electrodes, such as tantalum, tantalum nitride, etc. Plastic layers, such as poly(3,4-ethylenedioxythiophene)poly (styrenesulfonate) [PEDOT:PSS] may also be used. The layers may be planar or patterned. The substrate may be an organic patterned photoresist film. The substrate may include layers of oxides which are used as dielectric materials in MIM, DRAM, or FeRam technologies (for example, ZrO₂ based materials, HfO₂ based materials, TiO₂ based materials, rare earth oxide based materials, ternary oxide based materials, etc.) or from nitride-based films (for example, TaN, TiN, NbN) that are used as electrodes. The disclosed processes may deposit the Ti-containing layer directly on the wafer or directly on one or more than one (when patterned layers form the substrate) of the layers on top of the wafer. Furthermore, one of ordinary skill in the art will recognize that the terms "film" or "layer" used herein refer to a thickness of some material laid on or spread over a surface and that the surface may be a trench or a line. Throughout the specification and claims, the wafer and any associated layers thereon are referred to as substrates. The actual substrate utilized may also depend upon the specific precursor embodiment utilized. In many instances though, the preferred substrate utilized will be those that suffer damage from the presence of chlorine in TiCl₄, such as titanium oxide, tungsten metal, or GeSbTe layers.

The disclosed processes may selectively deposit the Ti-containing film, particularly when the Ti-containing film forming composition is exposed to a substrate made of multiple different materials. For example, blocking agents such as self assembling monolayers (SAM) may prevent the adsorption of the Ti halide-containing precursor on a portion of the substrate. The SAMs prevent growth of the Ti-containing film on specific areas, or types, of substrate. Alternatively or in addition, a free inhibitor may be added during the deposition process to prevent adsorption of the Ti halide-containing precursor on a portion of the substrate. In some cases, the adduct liberated from the Ti-containing film forming composition may deposit on certain surfaces and inhibit growth of the Ti-containing film on such surfaces. For instance, S-containing adducts may bind to copper and prevent growth of the Ti-containing film on copper. In other cases, TiX_4 may etch certain metallic surfaces, such as Al. As a result, the Ti-containing film may not grow on these surfaces. A selective deposition process may also result from any combination of these physical phenomena. As a result, one of ordinary skill in the art will recognize that specific Ti-containing film forming compositions will have different reactivities with different substrates.

The temperature and the pressure within the reactor are held at conditions suitable for vapor depositions. In other words, after introduction of the vaporized composition into the chamber, conditions within the chamber are such that at least part of the vaporized Ti halide-containing precursor is deposited onto the substrate to form a Ti-containing film. For instance, the pressure in the reactor may be held between about 1 Pa and about 10^5 Pa, more preferably between about 25 Pa and about 10^3 Pa, as required per the deposition parameters. Likewise, the temperature in the reactor may be held between about 100°C and about 500°C, preferably between about 200°C and about 450°C. One of ordinary skill in the art will recognize that “at least part of the vaporized Ti halide-containing precursor is deposited” means that some or all of the precursor reacts with or adheres to the substrate.

The temperature of the reactor may be controlled by either controlling the temperature of the substrate holder or controlling the temperature of the reactor wall. Devices used to heat the substrate are known in the art. The reactor wall may be heated to a sufficient temperature to obtain the desired film at a sufficient growth rate and with desired physical state and composition. A non-limiting exemplary temperature range to which the reactor wall may be heated includes from approximately 100°C to approximately 500°C. When a plasma deposition process is utilized, the deposition temperature may range from approximately 50°C to approximately 400°C. Alternatively,

when a thermal process is performed, the deposition temperature may range from approximately 200°C to approximately 450°C.

In addition to the disclosed Ti-containing film forming composition, a reactant may also be introduced into the reactor. The reactant may be an oxygen-containing gas such as one of O₂, O₃, H₂O, H₂O₂, NO, N₂O, NO₂, an alcohol (such as ethanol or methanol), a diol (such as ethylene glycol or hydrated hexafluoroacetone), oxygen containing radicals such as O[•] or OH[•], NO, NO₂, carboxylic acids, formic acid, acetic acid, propionic acid, and mixtures thereof. Preferably, the oxidizing gas is selected from the group consisting of O₂, O₃, H₂O, H₂O₂, oxygen containing radicals thereof such as O[•] or OH[•], and mixtures thereof.

Alternatively, the reactant may be H₂, NH₃, hydrazines (such as N₂H₄, MeHNNH₂, Me₂NNH₂, MeHNNHMe, phenyl hydrazine), organic amines (such as NMeH₂, NEtH₂, NMe₂H, NEt₂H, NMe₃, NEt₃, (SiMe₃)₂NH, cyclic amines like pyrrolidine or pyrimidine), nitriles (such as acetonitrile), diamines (such as ethylene diamine, dimethylethylene diamine, tetramethylethylene diamine), aminoalcohols (such as ethanolamine [HO-CH₂-CH₂-NH₂], bis ethanolamine [HN(C₂H₅OH)₂] or tris ethanolamine[N(C₂H₅OH)₃]), pyrazoline, pyridine, radicals thereof, or mixtures thereof. Preferably the reactant is H₂, NH₃, radicals thereof, or mixtures thereof.

In another alternative, the reactant may be N(SiH₃)₃; N(SiH_xR_{3-x})₃, with each x independently 1-3 and each R independently alkyl or NR'₂, with each R' independently H or C1-C4 alkyl (such as (H₃Si)₂N(SiH₂NEt₂), (H₃Si)₂N(SiH₂NiPr₂), or (H₃Si)₂N(SiH₂iPr)); R₃Si-NH-SiR₃, with each R independently H, Cl, Br, I, or a C1-C4 alkyl group (such as H₃Si-NH-SiH₃, H₂Si-NH-SiH₃, or Me₃Si-NH-SiMe₃); hydridosilanes (such as SiH₄, Si₂H₆, Si₃H₈, Si₄H₁₀, Si₅H₁₀, Si₆H₁₂); chlorosilanes and chloropolysilanes (such as SiHCl₃, SiH₂Cl₂, SiH₃Cl, Si₂Cl₆, Si₂HCl₅, Si₃Cl₈); bromosilanes and bromopolysilanes (such as SiHBr₃, SiH₂Br₂, SiH₃Br, Si₂Br₆, Si₂HBr₅, Si₃Br₈); iodosilanes and iodopolysilanes (such as SiHI₃, SiH₂I₂, SiH₃I, Si₂I₆, Si₂HI₅, Si₃I₈); alkylsilanes (such as Me₂SiH₂, Et₂SiH₂, MeSiH₃, EtSiH₃); and aminosilanes (such as tris(dimethylamino)silane, bis(diethylamino)silane, di-isopropylaminosilane and other mono, bis or tris aminosilanes); radicals thereof; or mixtures thereof. Preferably, the reactant is (SiH₃)₃N or an aminosilane, such as bis(diethylamino)silane.

The reactant may be treated by a plasma, in order to decompose the reactant into its radical form. N₂ may also be utilized as a reducing gas when treated with plasma. For instance, the plasma may be generated with a power ranging from about 50 W to about 2500 W, preferably from about 100 W to about 400 W. The plasma may be

generated or present within the reactor itself. Alternatively, the plasma may generally be at a location removed from the reactor, for instance, in a remotely located plasma system. One of skill in the art will recognize methods and apparatus suitable for such plasma treatment.

5 For example, the reactant may be introduced into a direct plasma reactor, which generates plasma in the reaction chamber, to produce the plasma-treated reactant in the reaction chamber. Exemplary direct plasma reactors include the Titan™ PECVD System produced by Trion Technologies. The reactant may be introduced and held in the reaction chamber prior to plasma processing. Alternatively, the plasma processing may
10 occur simultaneously with the introduction of the reactant. In-situ plasma is typically a 13.56 MHz RF inductively coupled plasma that is generated between the showerhead and the substrate holder. The substrate or the showerhead may be the powered electrode depending on whether positive ion impact occurs. Typical applied powers in in-situ plasma generators are from approximately 30 W to approximately 1000
15 W. Preferably, powers from approximately 30 W to approximately 600 W are used in the disclosed methods. More preferably, the powers range from approximately 100 W to approximately 500 W. The disassociation of the reactant using in-situ plasma is typically less than achieved using a remote plasma source for the same power input and is therefore not as efficient in reactant disassociation as a remote plasma system, which
20 may be beneficial for the deposition of Ti-containing films on substrates easily damaged by plasma.

 Alternatively, the plasma-treated reactant may be produced outside of the reaction chamber. The MKS Instruments' ASTRONi® reactive gas generator may be used to treat the reactant prior to passage into the reaction chamber. Operated at 2.45
25 GHz, 7kW plasma power, and a pressure ranging from approximately 0.5 Torr to approximately 10 Torr, the reactant O₂ may be decomposed into two O· radicals. Preferably, the remote plasma may be generated with a power ranging from about 1 kW to about 10 kW, more preferably from about 2.5 kW to about 7.5 kW.

 The vapor deposition conditions within the chamber allow the disclosed Ti-
30 containing film forming composition and the reactant to react and form a Ti-containing film on the substrate. In some embodiments, Applicants believe that plasma-treating the reactant may provide the reactant with the energy needed to react with the disclosed composition.

 Depending on what type of film is desired to be deposited, an additional precursor
35 compound may be introduced into the reactor. The precursor may be used to provide

additional elements to the Ti-containing film. The additional elements may include lanthanides (e.g., Ytterbium, Erbium, Dysprosium, Gadolinium, Praseodymium, Cerium, Lanthanum, Yttrium), germanium, silicon, aluminum, boron, phosphorous, hafnium, zirconium, a Group 3 element (i.e., Sc, Y, La, or Ac), or a Group 5 element (i.e., V, Nb, or Ta), or mixtures of these. When an additional precursor compound is utilized, the resultant film deposited on the substrate contains Ti in combination with at least one additional element.

When the resulting film contains Al, suitable reactants include trialkylaluminum (e.g., AlMe_3 , AlEt_3 , etc.), dialkylaluminum halide (e.g., AlMe_2Br , AlEt_2Br , etc.), alkylaluminum dihalide (e.g., AlMeBr_2 , AlEtBr_2 , etc.), alkylamino or alkoxy derivatives of aluminum (e.g., $\text{Al}(\text{NEt}_2)_3$, $\text{Al}(\text{OtBu})_3$, etc.), alanes, amine-adducted alanes (e.g., $\text{Al}:\text{NEt}_3$), and mixtures thereof. The resulting amorphous TiAl film may be used for micromirror arrays in complementary metal oxide semiconductors (CMOS). Schmidt et al., J. of Micro/Nanolithography, MEMS, and MOEMS, 7(2) 2008. Vapor deposition of the amorphous TiAl film provides better conformality, surface smoothness, compositional uniformity, and in general fewer defects than those produced by sputtering.

The Ti-containing film forming compositions and reactants may be introduced into the reactor either simultaneously (chemical vapor deposition), sequentially (atomic layer deposition) or different combinations thereof. The reactor may be purged with an inert gas between the introduction of the composition and the introduction of the reactant. Alternatively, the reactant and the composition may be mixed together to form a reactant/compound mixture, and then introduced to the reactor in mixture form. Another example is to introduce the reactant continuously and to introduce the Ti-containing film forming composition by pulse (pulsed chemical vapor deposition).

The vaporized composition and the reactant may be pulsed sequentially or simultaneously (e.g. pulsed CVD) into the reactor. Each pulse of composition may last for a time period ranging from about 0.01 seconds to about 100 seconds, alternatively from about 0.3 seconds to about 30 seconds, alternatively from about 0.5 seconds to about 10 seconds. The reactant may also be pulsed into the reactor. In such embodiments, the pulse of each gas may last from about 0.01 seconds to about 100 seconds, alternatively from about 0.3 seconds to about 30 seconds, alternatively from about 0.5 seconds to about 10 seconds. In another alternative, the vaporized composition and one or more reactants may be simultaneously sprayed from a shower head under which a susceptor holding several wafers is spun (spatial ALD).

Depending on the particular process parameters, deposition may take place for a varying length of time. Generally, deposition may be allowed to continue as long as desired or necessary to produce a film with the necessary properties. Typical film thicknesses may vary from several angstroms to several hundreds of microns, depending on the specific deposition process. The deposition process may also be performed as many times as necessary to obtain the desired film.

In one non-limiting exemplary CVD type process, the vapor phase of the disclosed Ti-containing film forming composition and a reactant are simultaneously introduced into the reactor. The two react to form the resulting Ti-containing thin film. When the reactant in this exemplary CVD process is treated with a plasma, the exemplary CVD process becomes an exemplary PECVD process. The reactant may be treated with plasma prior or subsequent to introduction into the chamber.

In one non-limiting exemplary ALD type process, the vapor phase of the disclosed Ti-containing film forming composition is introduced into the reactor, where the Ti halide-containing precursor physisorbs or chemisorbs on the substrate. Excess composition may then be removed from the reactor by purging and/or evacuating the reactor. A desired gas (for example, O_3) is introduced into the reactor where it reacts with the physisorbed or chemisorbed precursor in a self-limiting manner. Any excess reducing gas is removed from the reactor by purging and/or evacuating the reactor. If the desired film is a Ti metal film, this two-step process may provide the desired film thickness or may be repeated until a film having the necessary thickness has been obtained.

Alternatively, if the desired film contains the Ti metal and a second element, the two-step process above may be followed by introduction of the vapor of an additional precursor compound into the reactor. The additional precursor compound will be selected based on the nature of the Ti metal film being deposited. After introduction into the reactor, the additional precursor compound is contacted with the substrate. Any excess precursor compound is removed from the reactor by purging and/or evacuating the reactor. Once again, a desired gas may be introduced into the reactor to react with the precursor compound. Excess gas is removed from the reactor by purging and/or evacuating the reactor. If a desired film thickness has been achieved, the process may be terminated. However, if a thicker film is desired, the entire four-step process may be repeated. By alternating the provision of the Ti-containing compound, additional precursor compound, and reactant, a film of desired composition and thickness can be deposited.

When the reactant in this exemplary ALD process is treated with a plasma, the exemplary ALD process becomes an exemplary PEALD process. The reactant may be treated with plasma prior or subsequent to introduction into the chamber.

In a second non-limiting exemplary ALD type process, the vapor phase of one of the disclosed Ti halide-containing precursors, for example $\text{TiBr}_4 \cdot \text{S}(\text{nPr})_2$, is introduced into the reactor, where it is contacted with a TiO substrate. Excess Ti halide-containing precursor may then be removed from the reactor by purging and/or evacuating the reactor. A desired gas (for example, NH_3) is introduced into the reactor where it reacts with the absorbed Ti halide-containing precursor in a self-limiting manner to form a TiN film. Any excess N-containing gas is removed from the reactor by purging and/or evacuating the reactor. These two steps may be repeated until the TiN film obtains a desired thickness.

The Ti-containing films resulting from the processes discussed above may include a titanium oxide (Ti_nO_m , wherein each n and m is an integer which inclusively ranges from 1 to 6), such as TiO_2 ; a titanium nitride, such as TiN or TiSiN ; a titanium oxide containing another element M (TiM_iO_x , wherein i ranges from 0.1 to 1; x ranges from 1 to 6; and M is selected from zirconium, hafnium, a Group 3 element, a Group 5 element, a lanthanide, Si, Al, B, P or Ge); or a titanium oxynitride ($\text{TiM}'_i\text{N}_y\text{O}_x$, wherein i ranges from 0 to 1; x and y range from 1 to 6; and M' is selected from hafnium, zirconium, a Group 3 element, a Group 5 element, a lanthanide, Si, Al, B, P or Ge). One of ordinary skill in the art will recognize that by judicial selection of the appropriate disclosed compound, optional precursor compounds, and reactant species, the desired film composition may be obtained.

The Ti-containing film forming composition may be used to deposit Ti on a silicon layer and annealed to form a TiSi_2 layer. Alternatively, the Ti-containing film forming composition and a Si-containing reactant, such as TSA, may be used to form a TiSi_2 layer. In either alternative, the TiSi_2 layer formed preferably exhibits C54 polymorphism and a resistivity between approximately $10 \mu\Omega\text{cm}$ and approximately $20 \mu\Omega\text{cm}$, preferably between approximately $13 \mu\Omega\text{cm}$ and approximately $16 \mu\Omega\text{cm}$. Alternatively, if a higher resistivity is desired, a C49 polymorphic TiSi_2 layer may be formed. The C49 polymorphic TiSi_2 layer has a resistivity between approximately $60 \mu\Omega\text{cm}$ and approximately $70 \mu\Omega\text{cm}$. The polymorphic phase may be determined using XRD.

The Ti-containing films resulting from the processes discussed above contain between approximately 0 atomic % to approximately 5 atomic % of C; between approximately 0 atomic % to approximately 40 atomic % of O; between approximately 0

atomic % to approximately 2 atomic % of S; between approximately 0 atomic % to approximately 2 atomic % of Se; between approximately 0 atomic % to approximately 2 atomic % of Te; or between approximately 0 atomic % to approximately 2 atomic % of P impurities (depending on the adduct composition).

5 Upon obtaining a desired film thickness, the film may be subject to further processing, such as thermal annealing, furnace-annealing, rapid thermal annealing, UV or e-beam curing, and/or plasma gas exposure. Those skilled in the art recognize the systems and methods utilized to perform these additional processing steps. For example, the Ti-containing film may be exposed to a temperature ranging from approximately
10 200°C and approximately 1000°C for a time ranging from approximately 0.1 second to approximately 7200 seconds under an inert atmosphere, a H-containing atmosphere, a N-containing atmosphere, an O-containing atmosphere, or combinations thereof. Most preferably, the temperature is 400°C for 3600 seconds under a H-containing atmosphere or an O-containing atmosphere. The resulting film may contain fewer impurities and
15 therefore may have an improved density resulting in improved leakage current. The annealing step may be performed in the same reaction chamber in which the deposition process is performed. Alternatively, the substrate may be removed from the reaction chamber, with the annealing/flash annealing process being performed in a separate apparatus. Any of the above post-treatment methods, but especially thermal annealing,
20 has been found effective to reduce carbon and nitrogen contamination of the Ti-containing film. This in turn tends to improve the resistivity of the film.

Examples

25 The following examples illustrate experiments performed in conjunction with the disclosure herein. The examples are not intended to be all inclusive and are not intended to limit the scope of disclosure described herein.

30 Due to its hygroscopic nature, the TiX_4 reactants and $TiX_n:L_y$ adducts were all handled in a glove box under dried inert atmosphere. The various Lewis base ligands were dried and stored under argon using standard drying techniques, such as molecular sieves or other desiccant treatment.

Example 1: Synthesis of $TiBr_4:S(nPr)_2$

35 0.5 g of solid $TiBr_4$ was reacted with 1 molar equivalent of $S(nPr)_2$ in a glove box. An exotherm and immediate color change to dark red was observed. Almost no solid particles remained. After 15 minutes, the mixture was filtered using a syringe plug filter

to produce a clear dark red liquid. According to Baker et al., the resulting product is monosubstituted and adopts a penta-coordinated trigonal bipyramidal geometry:

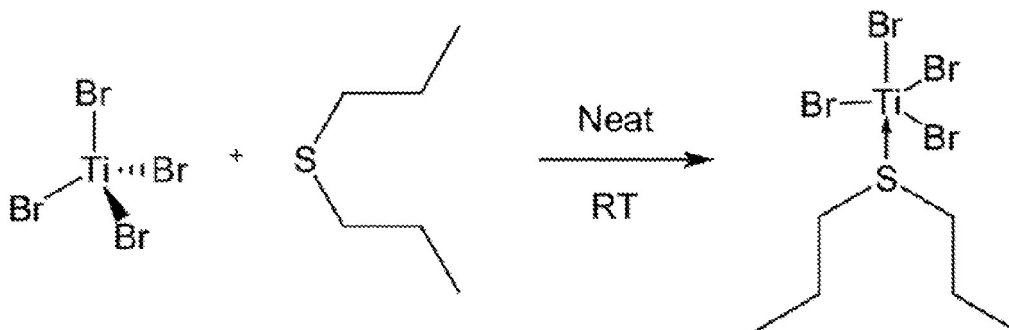


FIG 4 is a ^1H -NMR spectrum of the resulting product in C_6D_6 . The clean spectrum shows no impurities. The α -Ti ^1H splitting suggests magnetic inequivalence of the two propyl groups, which may be due to the restricted conformation of the ligand.

FIG 5 is a ThermoGravimetric Analysis/Differential Thermal Analysis (TGA/DTA) graph illustrating the percentage of weight loss (TGA) or the differential temperature (DTA) of $\text{TiBr}_4\cdot\text{S}(\text{nPr})_2$ in an Al_2O_3 pan upon temperature increase at 1 atmosphere. The TGA results demonstrate clean evaporation (<0.5% residue). No residue was obtained when the TGA analysis was performed at reduced pressure (~12 Torr).

Example 2: Synthesis of $\text{TiBr}_4\cdot\text{SEtPr}$

0.5 g of solid TiBr_4 were reacted with 1 molar equivalent of SEtPr in a glove box. An exothermic reaction and immediate color change from orange to dark red was observed. Almost no solid particles remained. After stirring for 15 minutes, the mixture was filtered using a syringe plug filter to produce a clear dark red liquid.

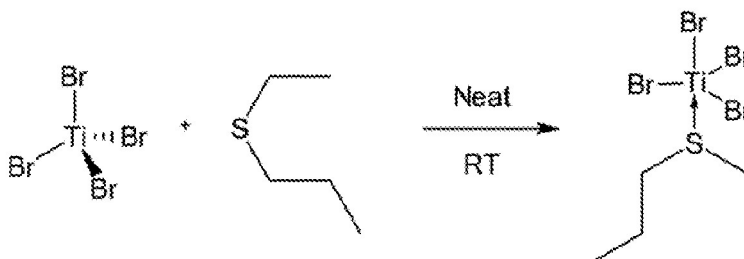


FIG 6 is a ^1H -NMR spectrum of the resulting product in C_6D_6 . The clean spectrum shows no impurities.

FIG 7 is a TGA/DTA graph illustrating the percentage of weight loss (TGA) or the differential temperature (DTA) of $\text{TiBr}_4\cdot\text{S}(\text{nPr})_2$ in an Al_2O_3 pan upon temperature increase at 1 atmosphere. The TGA results demonstrate clean evaporation (<0.5%

residue). No residue was obtained when the TGA analysis was performed at reduced pressure (~12 Torr).

Example 3: Atomic layer deposition (ALD) of $\text{TiBr}_4\text{:S(nPr)}_2$

5 ALD of TiN was performed using the liquid $\text{TiBr}_4\text{:S(nPr)}_2$ prepared in Example 1. **FIG 8** is a flow chart showing the ALD process. In Step 1, a 3 second pulse of NH_3 is introduced into a reaction chamber (not shown) containing a SiO_2 substrate and reacts with the substrate to produce the NH_2 -terminated substrate of **FIG 9**. The reactor was maintained at 200°C, 300°C, and 400°C at 1 Torr. The 3 second NH_3 pulse is followed
10 by a 10 second Ar purge pulse to remove any excess NH_3 or reaction by-products.

In Step 2 of **FIG 8**, a 6 second pulse of the vapor form of the $\text{TiBr}_4\text{:S(nPr)}_2$ precursor is introduced into a reaction chamber. The liquid $\text{TiBr}_4\text{:S(nPr)}_2$ precursor of Example 1 was placed in a vessel heated and maintained at 72°C to produce the vapor form. The vessel utilized a cross flow configuration, in which the ends of the inlet conduit
15 and outlet conduit were both located above the surface of the Ti-containing film forming composition. **FIG 10** is a schematic side view of the substrate at the start of Step 2. **FIG 11** is a schematic side view of the reaction between the $\text{TiBr}_4\text{:S(nPr)}_2$ precursor with the substrate as well as the reaction by-products, such as HBr and S(nPr)_2 . The S(nPr)_2 reaction by-product is produced by cleavage of the S(nPr)_2 adduct from the $\text{TiBr}_4\text{:S(nPr)}_2$ precursor. The HBr reaction by-product is produced by the reaction between the $-\text{NH}_2$
20 substrate surface and one Br of the $\text{TiBr}_4\text{:S(nPr)}_2$ precursor.

In Step 3 of **FIG 8**, a ten second argon pulse purges any excess $\text{TiBr}_4\text{:S(nPr)}_2$ precursor and reaction by-products from the reaction chamber to produce the substrate of **FIG 12**.

25 In Step 4 of **FIG 8**, the process may be repeated if the desired film thickness has not been obtained by introducing the 3 second NH_3 pulse of Step 1. **FIG 13** is a schematic side view of the reaction between the substrate of **FIG 12** with the NH_3 reactant of Step 1 of **FIG 8**, as well as the reaction by-products, such as HBr. The HBr reaction by-product is produced by reaction of one Br of the TiBr_3 substrate with one H of the NH_3 reactant. The 3 second NH_3 pulse is followed by a 10 second Ar purge pulse
30 to remove any excess NH_3 or reaction by-products.

ALD saturation behavior was observed at 400°C with a growth rate of 0.57 Å/cycle on silicon dioxide substrate (SiO_2). 74% step coverage was obtained after 300 cycles on a feature having a 1:20 aspect ratio.

FIG 14 is a graph demonstrating (a) the growth rate and (b) film thickness of TiN thin films using $\text{TiBr}_4:\text{S}(\text{nPr})_2/\text{NH}_3$ as a function of the substrate temperature between 200 and 400 °C. Linear growth was observed.

The stoichiometry of some TiN films was analysed by XPS (X ray Photoelectron Spectroscopy). However, the films contained a large amount of oxygen. The oxygen may have been the result of handling the films under atmosphere after completion of the deposition process. Nonetheless, the Ti:N ratio of the films was approximately 1:1.

Comparative Example

Comparative ALD of TiN was performed using solid TiBr_4 . TiBr_4 was placed in a vessel heated and maintained at 55°C. The reactor was maintained at 200°C, 300°C, and 500°C at 0.5 Torr. Length of TiBr_4 introduction, argon purge, NH_3 introduction, and argon purge was 3 seconds, 10 seconds, 2 seconds, and 10 seconds, respectively. ALD saturation behavior was observed at 300°C and 500°C with a growth rate of 0.57 and 056 Å/cycle, respectively, on silicon wafer (Si). 74.5% step coverage was obtained after 200 cycles on a feature having a 1:20 aspect ratio.

As can be seen, the ALD results using the liquid $\text{TiBr}_4:\text{S}(\text{nPr})_2$ precursor were similar to those obtained using the solid TiBr_4 precursor. However, the liquid $\text{TiBr}_4:\text{S}(\text{nPr})_2$ precursor is much easier to handle than the solid TiBr_4 precursor.

It will be understood that many additional changes in the details, materials, steps, and arrangement of parts, which have been herein described and illustrated in order to explain the nature of the invention, may be made by those skilled in the art within the principle and scope of the invention as expressed in the appended claims. Thus, the present invention is not intended to be limited to the specific embodiments in the examples given above and/or the attached drawings.

We claim:

1. A titanium-containing film forming composition comprising a titanium bromide - containing precursor having one of the following formula:



with $b=3$ or 4 ; $c=1-3$; $X = \text{Br}$; $A = \text{SR}_2, \text{SeR}_2, \text{TeR}_2$ or PR_3 , and each R is independently H or a $\text{C}_1\text{-C}_5$ hydrocarbon, wherein the Ti bromide-containing precursor is a liquid at standard temperature and pressure.

10 2. The titanium-containing film forming composition of claim 1, further comprising a mixture of $\text{TiBr}_2(=\text{O})$, $\text{TiBr}_3(\text{OH})$, and TiO_2 .

3. The titanium-containing film forming composition of claim 2, further comprising hydrogen bromide.

15 4. The titanium-containing film forming composition of claim 1, further comprising a mixture of $\text{TiI}_2(=\text{O})$, $\text{TiI}_3(\text{OH})$, and TiO_2 .

20 5. The titanium-containing film forming composition of claim 1, further comprising hydrogen iodide.

6. The titanium-containing film forming composition of claim 1, wherein A is SR_2 .

25 7. The titanium - containing film forming composition of claim 6, wherein each R is independently a $\text{C}_1 - \text{C}_2$ hydrocarbon when $c = 2$.

8. The titanium-containing film forming composition of claim 6, wherein the Ti bromide-containing precursor is $\text{TiBr}_4\text{:S}(\text{nPr})_2$.

30 9. The titanium-containing film forming composition of claim 6, further comprising $\text{TiX}_4\text{:SR}'_2$, wherein each R' is independently H or a $\text{C}_1 - \text{C}_5$ hydrocarbon and $R' \neq R$.

10. The titanium-containing film forming composition of claim 1, wherein A is SeR_2 .

35 11. The titanium-containing film forming composition of claim 1, wherein A is TeR_2 .

12. The titanium - containing film forming composition of claim 1, wherein A is PR_3 .
13. The titanium-containing film forming composition of claim 1, further comprising a hydrocarbon solvent or of free adduct.
14. The titanium-containing film forming composition of claim 1, further comprising H_2O .
15. A method of depositing a Ti-containing film on a substrate, the method comprising introducing the Ti-containing film forming composition of claim 1 into a reactor containing the substrate and depositing at least part of the Ti bromide-containing precursor onto the substrate to form the Ti-containing film.
16. The method of claim 15, further comprising introducing a reactant into the reactor.
17. The method of claim 15, wherein the Ti-containing film is selectively deposited onto the substrate.