

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020888 A3

(51) International Patent Classification⁷: **H01B 7/29**, 7/00

(21) International Application Number:

PCT/US2003/026953

(22) International Filing Date: 28 August 2003 (28.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/406,607 28 August 2002 (28.08.2002) US

60/476,939 9 June 2003 (09.06.2003) US

(71) Applicant (for all designated States except US): **FEDERAL-MOGUL POWERTRAIN, INC.** [US/US]; 26555 Northwestern Highway, Southfield, MI 48034 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GLADFELTER, Harry, F.** [US/US]; 103 Brian Way, Kimberton, PA 19442 (US). **MATTE, Paul, J.** [US/US]; 24 Oneida Court, Chester Springs, PA 19425 (US). **PENDERGAST, Patrick, M.** [US/US]; 122 Three Ponds lane, Malvern, PA 19355 (US). **ROSS, Dawn, D.** [US/US]; 1003 Highspire Drive, West Chester, PA 19382 (US).

(74) Agents: **CHIONCHIO, John, A.** et al.; Synnestvedt & Lechner LLP, 2600 Aramark Tower, 1101 Market Street, Philadelphia, PA 19107-2950 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: CABLE GUIDE SLEEVING STRUCTURE

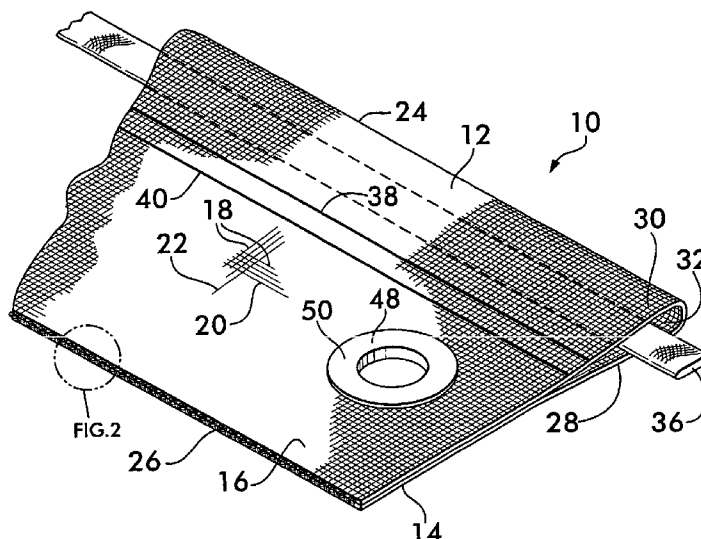

(57) Abstract: An elongated sleeve structure (10) for insertion and protection of elongated items (46) within a duct (31) is disclosed. The sleeve structure (10) is formed from a flexible sleeve woven from warp yarns (20) and fill yarns (22) to produce opposed layers (14 & 16) in closely spaced relation. The layers (14 & 16) have a common seamless edge and are joined along a second edge by knit stitch formed by interlooping of successive traverses of the fill yarn (22) which is common to both layers (14 & 16). The layers (14 & 16) are of equal width and are resiliently separable into a spaced apart relationship defining a central space which accommodates the elongated items (36). A pull tape (36) is positioned between the opposed layers from drawing the elongated is positioned within the duct (31). Multiple sleeve structures (10) may be joined together in an assembly using an attachment piece allowing a plurality of sleeve structures (10) to be pulled simultaneously.



(88) Date of publication of the international search report:

17 June 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.