

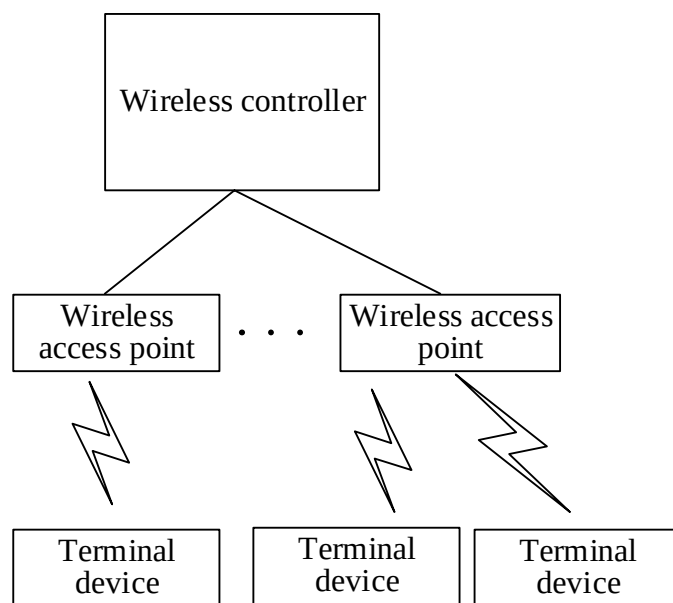


FIG. 1

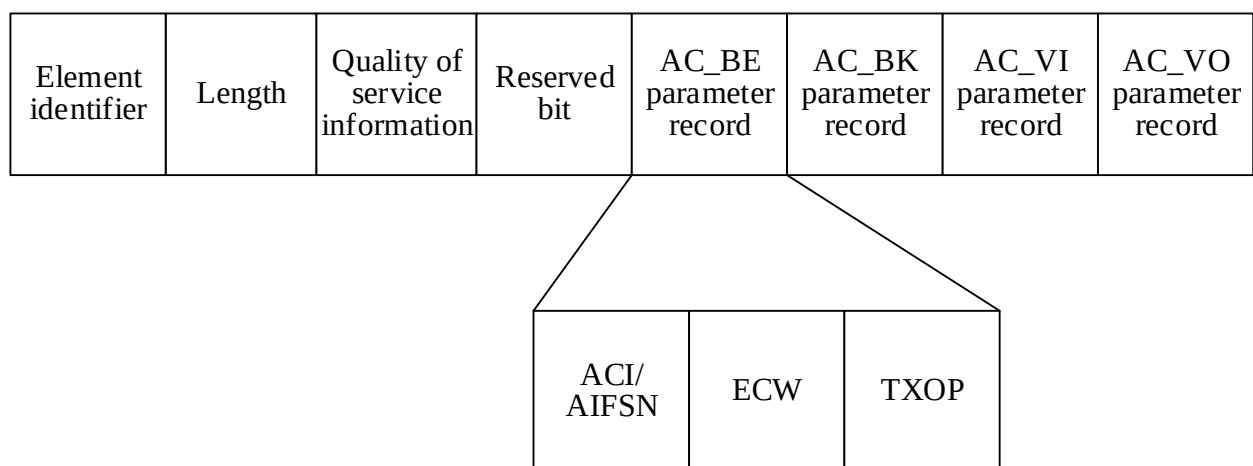


FIG. 2

AC	CWmin	CWmax	AIFSN	TXOP limit
AC_BK	31	1023	7	0
AC_BE	31	1023	3	0
AC_VI	15	31	2	3.008 ms
AC_VO	7	15	2	1.504 ms
legacy	15	1023	2	0

FIG. 3

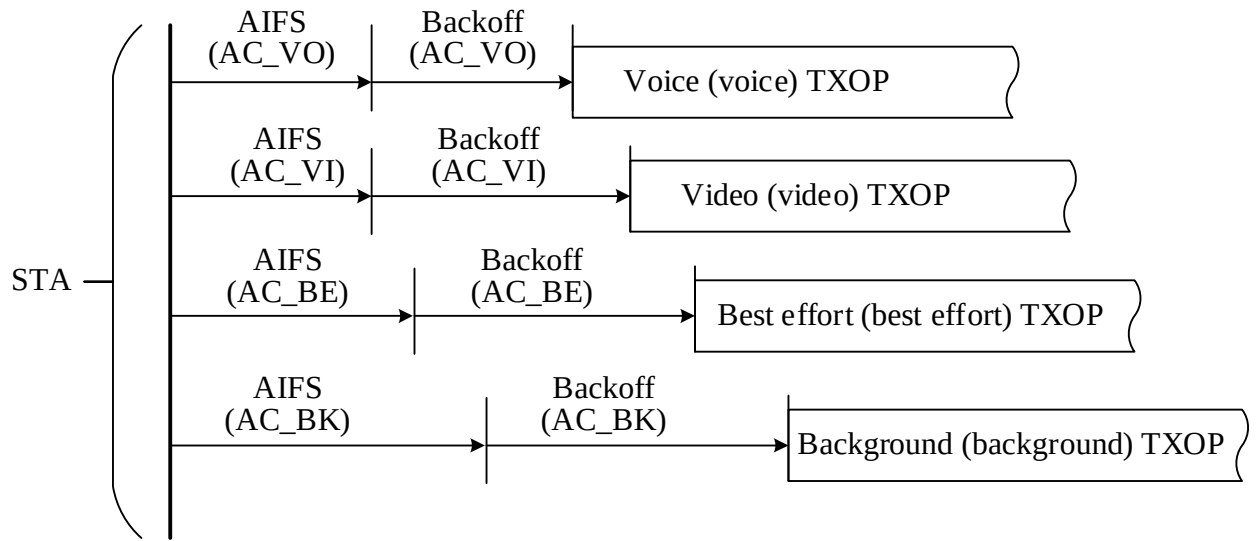


FIG. 4

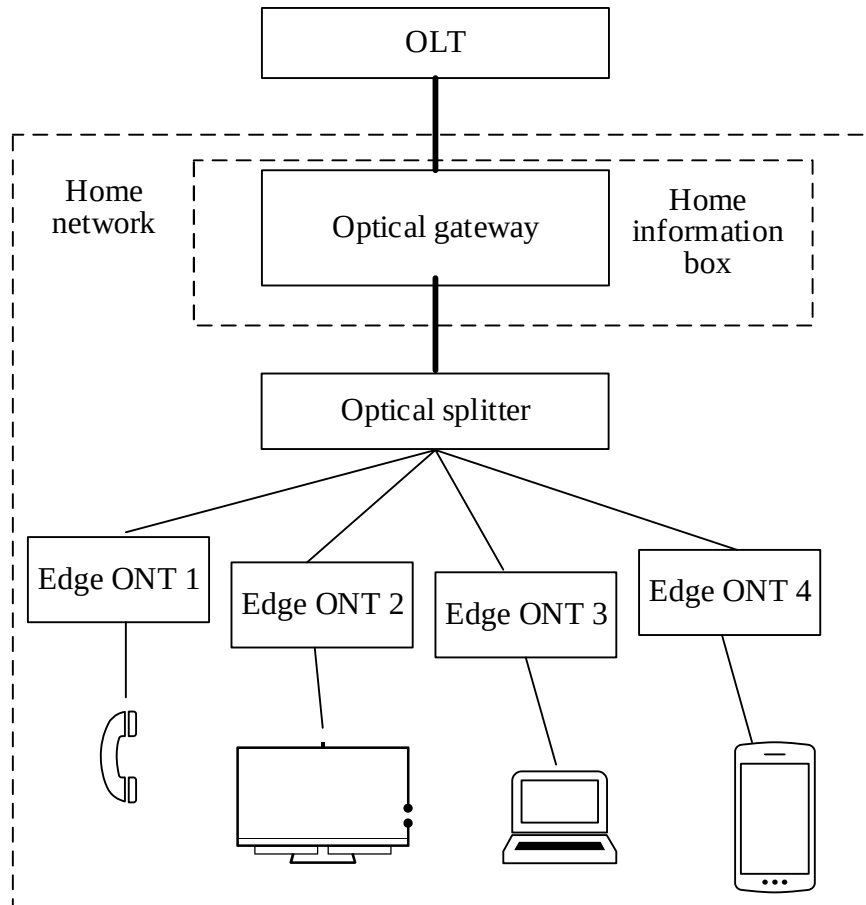


FIG. 5A

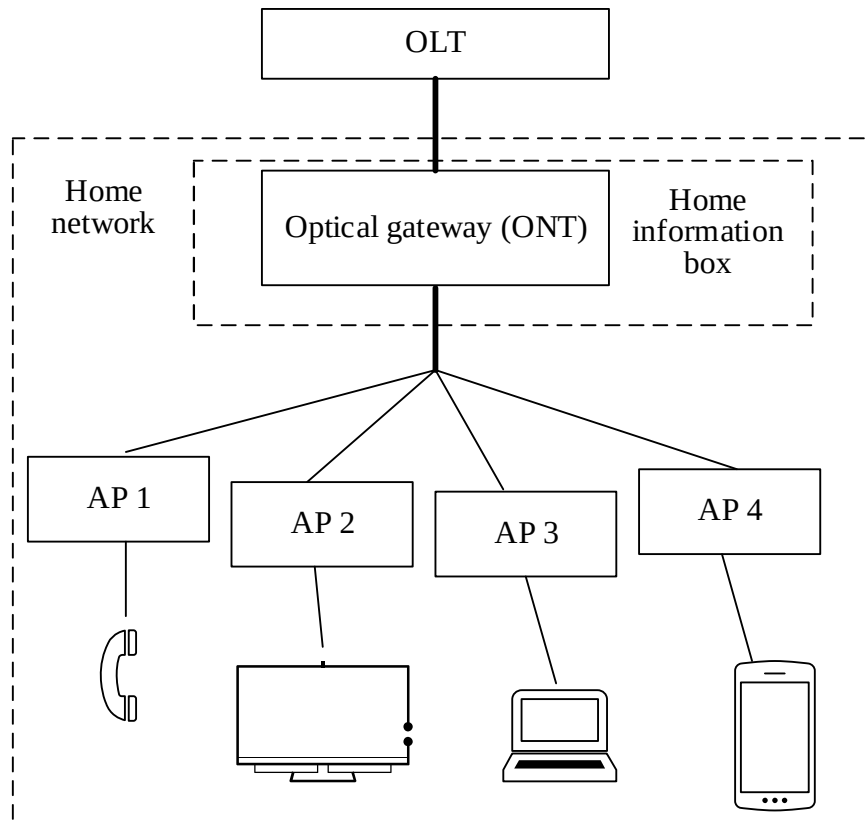


FIG. 5B

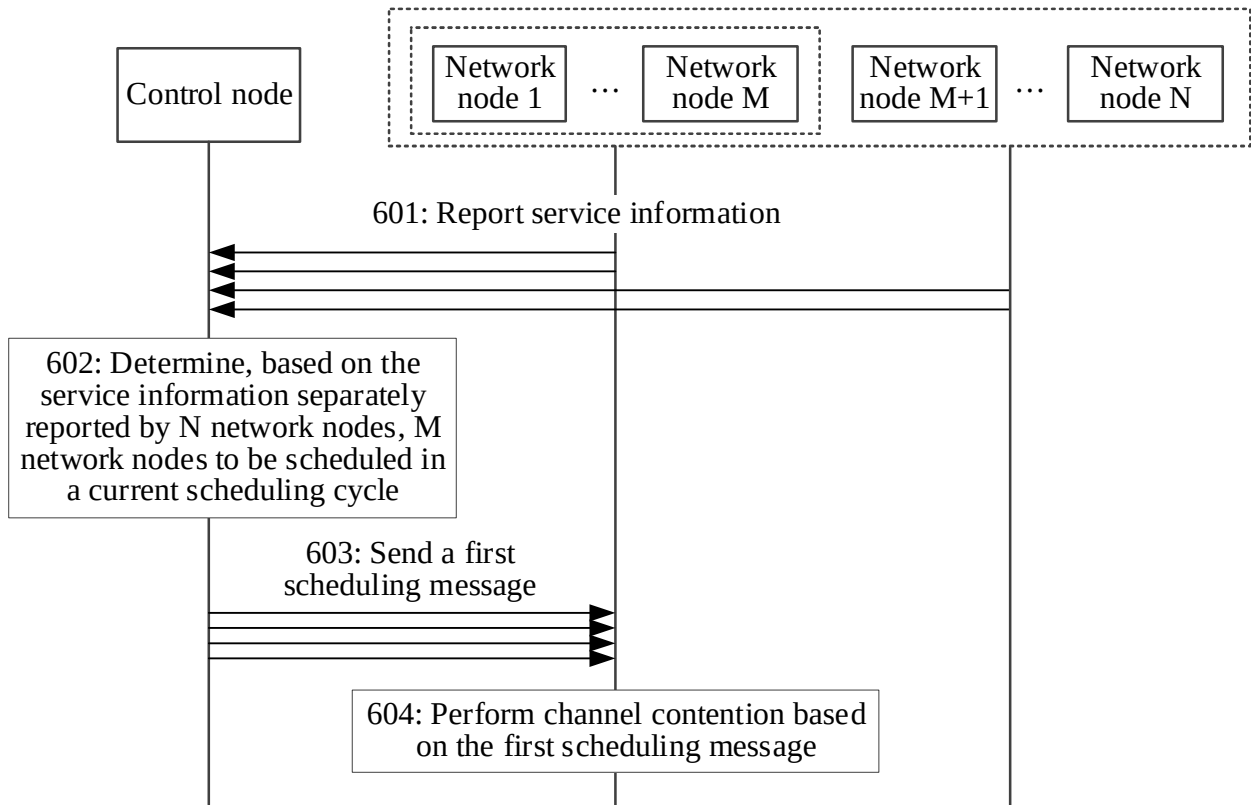


FIG. 6

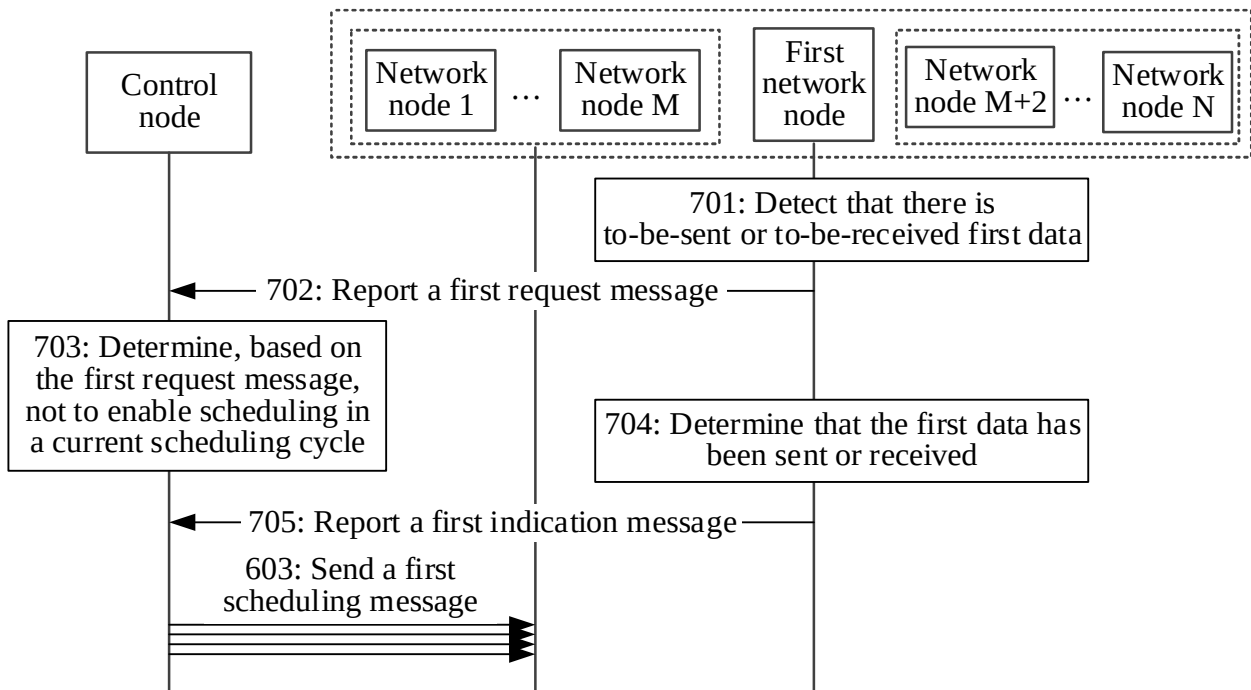


FIG. 7A

Message type	Network node identifier	Priority request	Reserved bit
--------------	-------------------------	------------------	--------------

FIG. 7B

Message type	Network node identifier	Information indicating that first data has been transmitted	Reserved bit
--------------	-------------------------	---	--------------

FIG. 7C

Message type	Network node identifier	Scheduling enabling information	Air interface rate	Aggregation quantity	Transmit power	Reserved bit
--------------	-------------------------	---------------------------------	--------------------	----------------------	----------------	--------------

FIG. 8

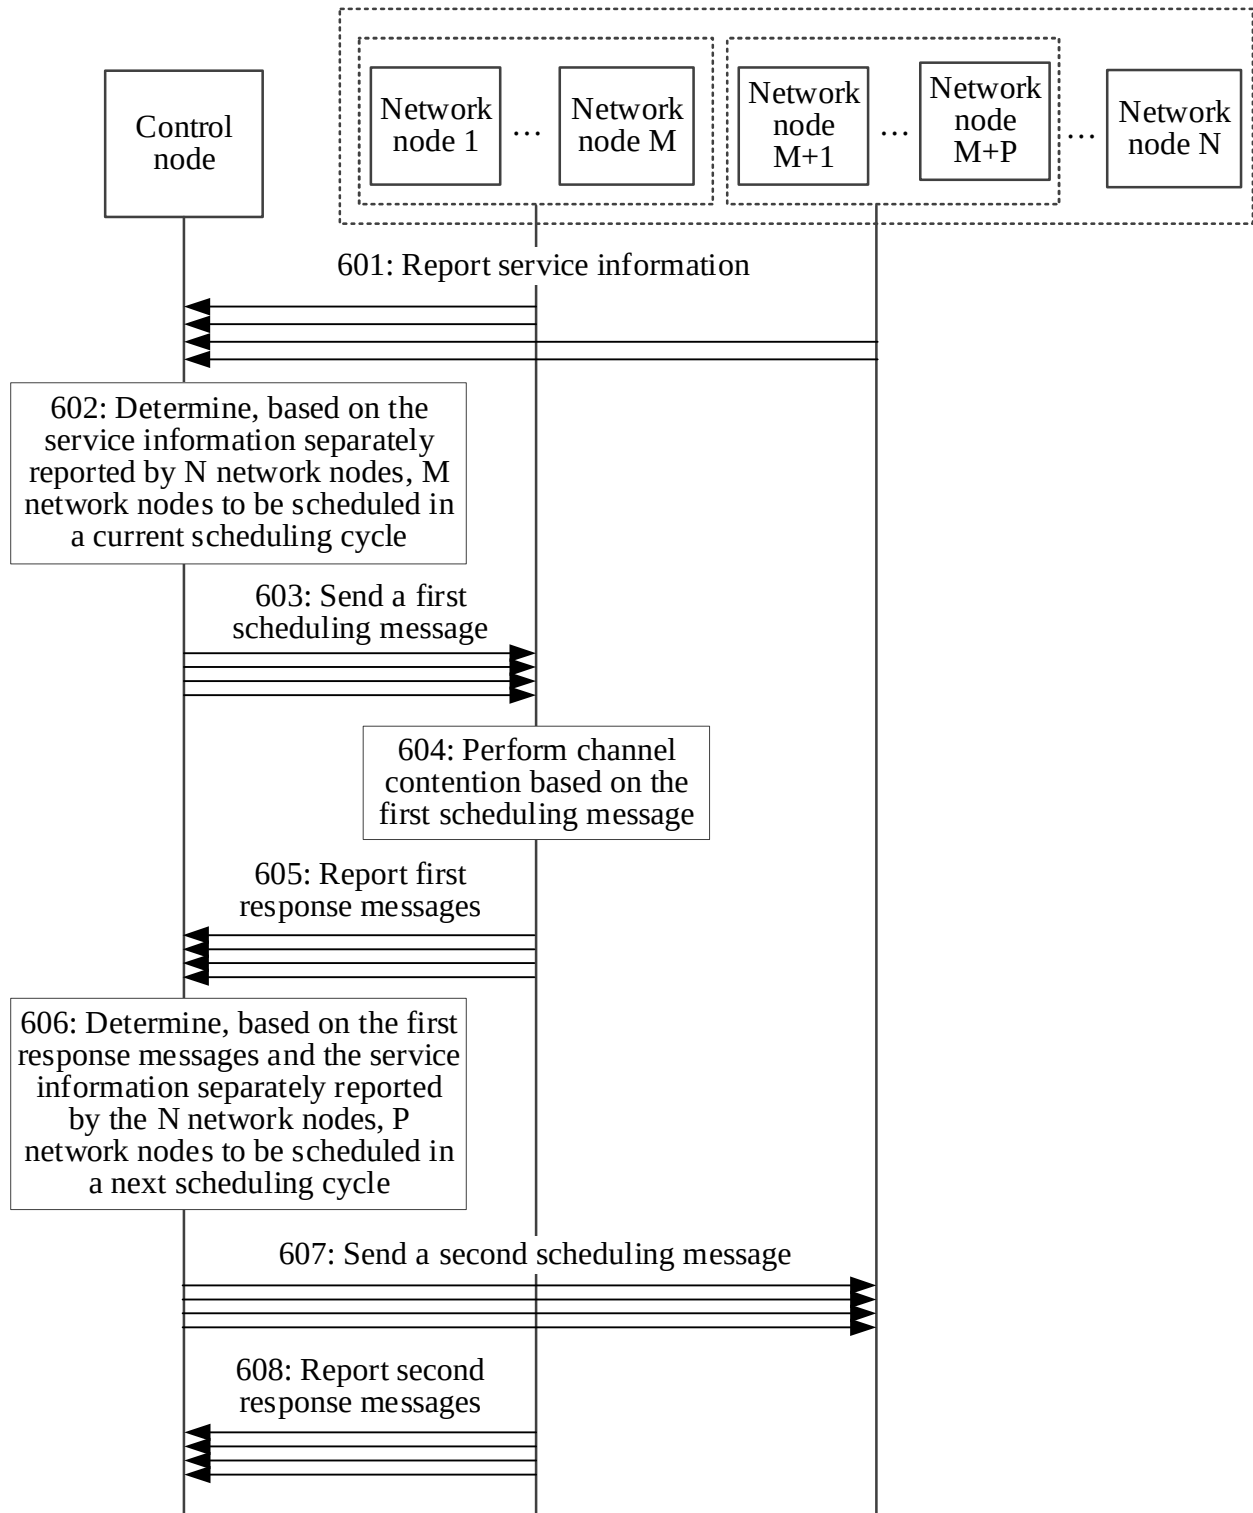


FIG. 9

Message type	Network node identifier	Information indicating that a channel is won through contention	Reserved bit
--------------	-------------------------	---	--------------

FIG. 10

Message type	Network node identifier	Sending complete information	Service traffic	Service delay	Service type	Service priority	Reserved bit
--------------	-------------------------	------------------------------	-----------------	---------------	--------------	------------------	--------------

FIG. 11

Destination address	Source address	Length	Type	Message type	Network node identifier	Priority request	Reserved bit
---------------------	----------------	--------	------	--------------	-------------------------	------------------	--------------

FIG. 12A

Destination address	Source address	Length	Type	Message type	Network node identifier	Information indicating that first data has been transmitted	Reserved bit
---------------------	----------------	--------	------	--------------	-------------------------	---	--------------

FIG. 12B

Destination address	Source address	Length	Type	Message type	Network node identifier	Scheduling enabling information	Air interface rate	Aggregation quantity	Transmit power	Reserved bit
------------------------	-------------------	--------	------	--------------	----------------------------	---------------------------------------	--------------------------	-------------------------	-------------------	-----------------

FIG. 12C

Destination address	Source address	Length	Type	Message type	Network node identifier	Information indicating that a channel is won through contention	Reserved bit
---------------------	----------------	--------	------	--------------	-------------------------	---	--------------

FIG. 12D

Destination address	Source address	Length	Type	Message type	Network node identifier	Sending complete information	Service traffic	Service delay	Service type	Service priority	Reserved bit
------------------------	-------------------	--------	------	-----------------	-------------------------------	------------------------------------	--------------------	------------------	-----------------	---------------------	-----------------

FIG. 12E

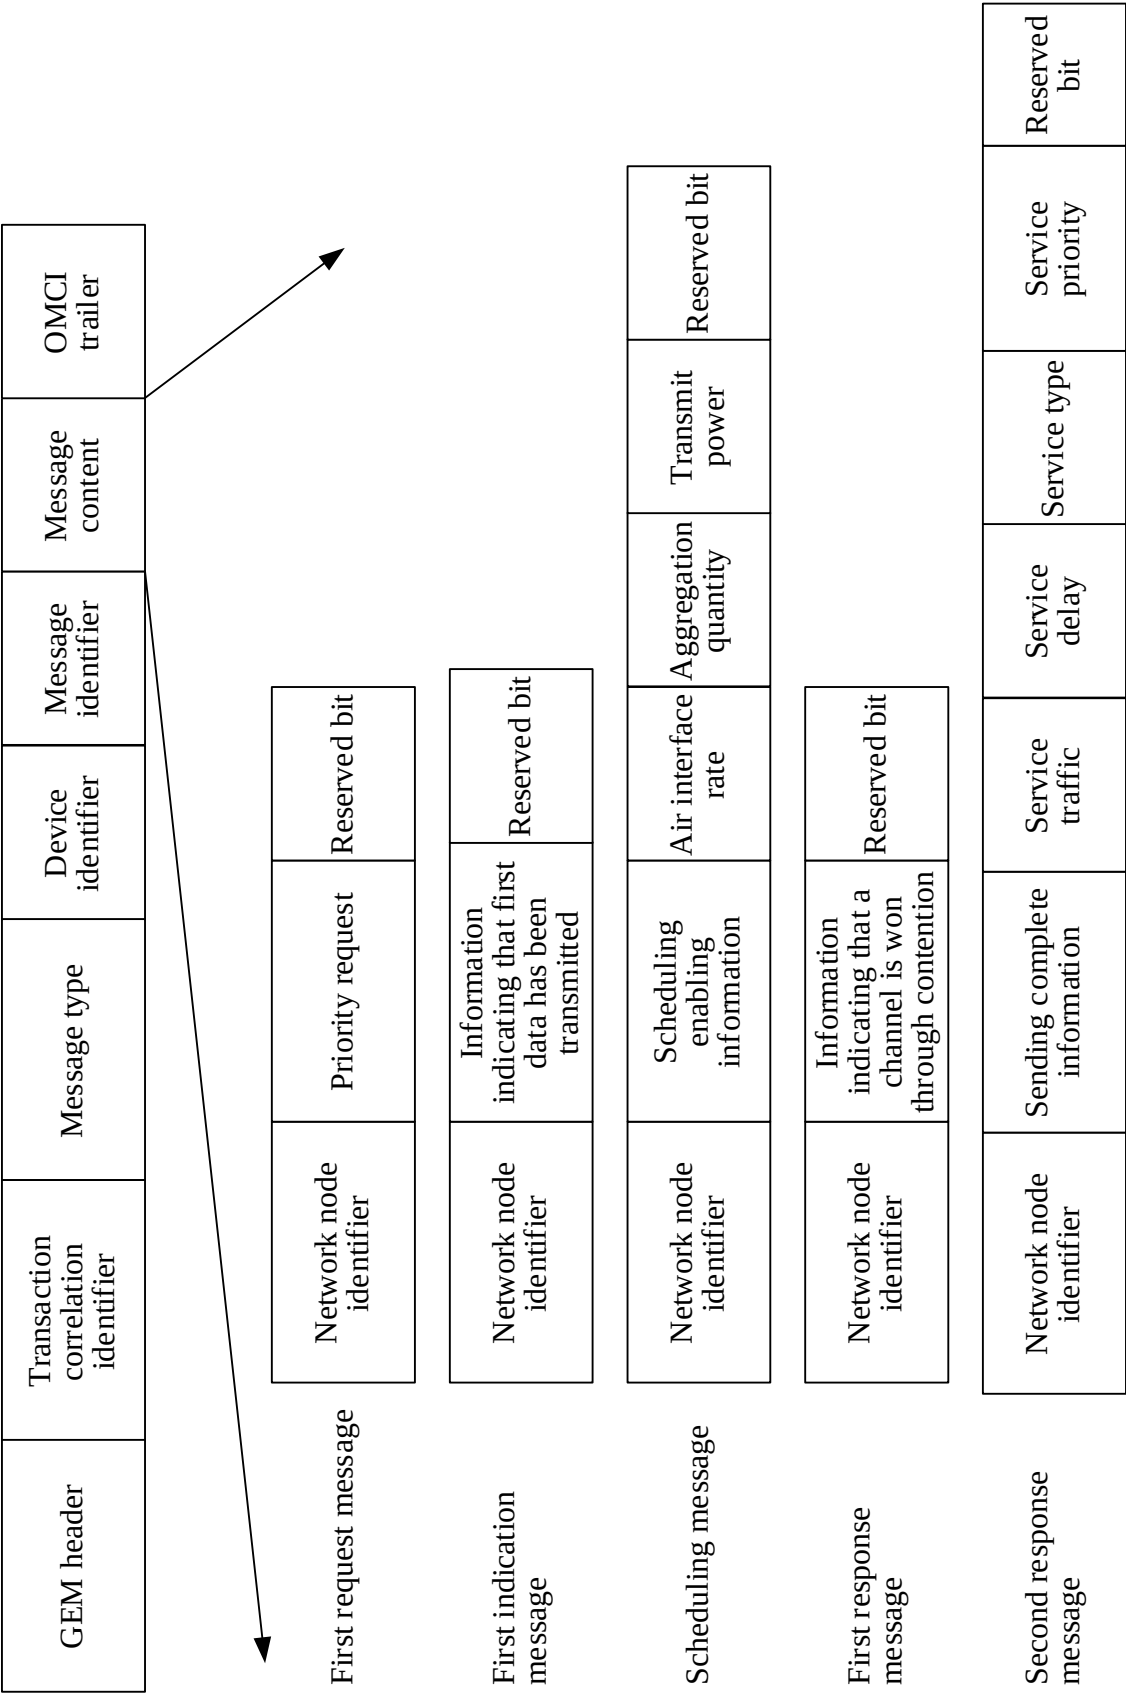


FIG. 13

Scheduling apparatus 1400

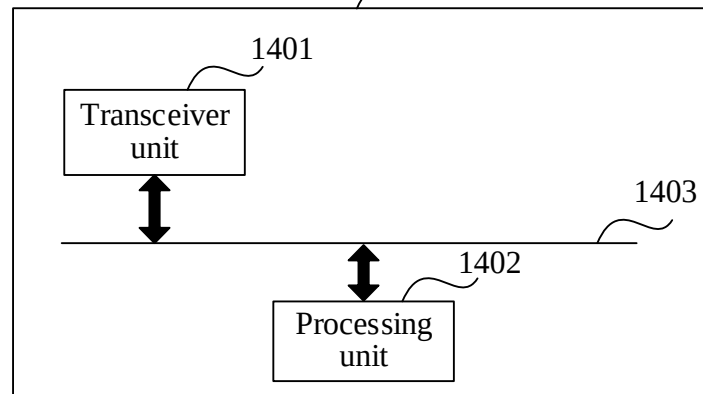


FIG. 14

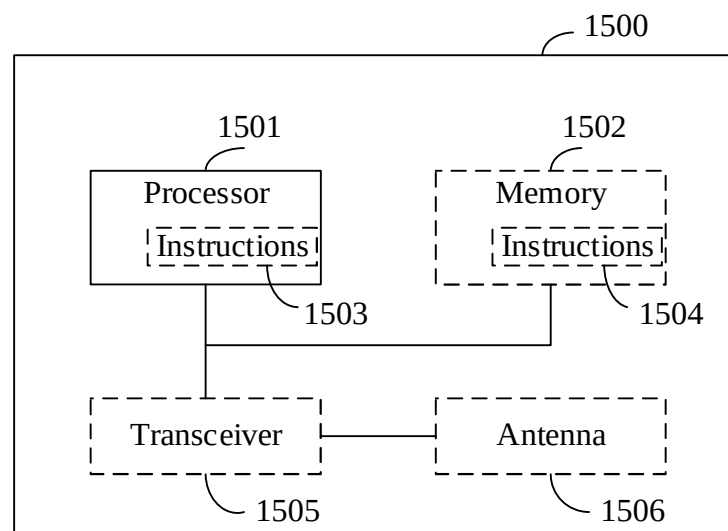


FIG. 15

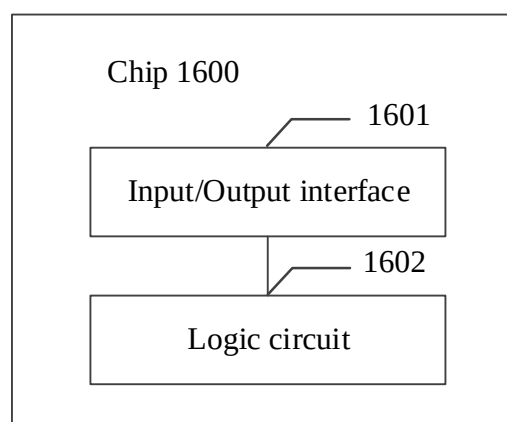


FIG. 16