

REPLACED SHEETS		SG
☒	Description : paged ..1..... to paged ..26.....	
☒	Claim(s) : paged ..27..... to paged ..30.....	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged ..31..... to paged	
DATE OF RECEIPT		

This Sheet Has Been Replaced



01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34

BACKGROUND OF THE INVENTION

This invention relates to improved lubricating oils, especially internal combustion engine lubricating oils, and additives and additives mixtures employable for the preparation of such lubricating oils.

Automobile spark ignition and diesel engines have valve train systems, including valves, cams and rocker arms which present special lubrication concerns. It is extremely important that the lubricant, i.e. the engine oil, protects these parts from wear. Further, it is important for engine oils to suppress the production of deposits in the engines. Such deposits are produced from non-combustibles and incomplete combustibles of hydrocarbon fuels (e.g., gasoline, diesel fuel oil) and by the deterioration of the engine oil employed.

Engine oils use a mineral oil or a synthetic oil as a base oil. However, simple base oils alone do not provide the necessary properties to provide the necessary wear protection, deposit control, etc. required to protect internal combustion engines. Thus, base oils are formulated with various additives, for imparting auxiliary functions, such as ashless dispersants, metallic detergents (i.e., metal-containing detergents), antiwear agents, antioxidants (i.e., oxidation inhibitors), viscosity index improvers and the like to give a compounded oil (i.e., a lubricating oil composition).

A number of such engine oil additives are known and employed in practice. Zinc dialkyldithiophosphates are, for example, because of their favorable characteristics as an antiwear agent and performance as an oxidation inhibitor, contained

01 in most all of the commercially available internal
02 composition engine oils, especially those used for
03 automobiles.
04

05 However, a problem has arisen with respect to the use of
06 zinc dialkyldithiophosphate, because phosphorous derivatives
07 poison catalyst components of catalytic converters. This is
08 a major concern, because effective catalytic converters are
09 needed to reduce pollution and to meet governmental
10 regulation designed to reduce toxic gases, such as
11 hydrocarbons, carbon monoxide, and nitrogen oxides, in
12 internal combustion engine exhaust emission. Such catalytic
13 converters generally use a combination of catalytic metals,
14 such as platinum or variations, and metal oxides and are
15 installed in the exhaust streams, e.g., the exhaust pipes of
16 automobiles, to convert the toxic gases to nontoxic gases.
17 As before mentioned these catalyst components are poisoned
18 by the phosphorous component, or the phosphorous
19 decomposition products of the zinc dialkyldithiophosphate;
20 and accordingly, the use of engine oils containing
21 phosphorous additives may substantially reduce the life and
22 effectiveness of catalytic converters. Therefore, it would
23 be desirable to reduce the phosphorous content in the engine
24 oils so as to maintain the activity and extend the life of
25 the catalytic converter.
26

27 There is also governmental and automotive industry pressure
28 towards reducing phosphorous content; for example, United
29 States Military Standards MIL-L-46152E and the ILSAC
30 Standards defined by the Japanese and United States
31 Automobile Industry Association require engine oils to have
32 phosphorous content below 0.12 wt. %. The phosphorous
33 content in most high grade engine oils containing zinc
34 dialkyldithiophosphate is approximately 0.1 wt. %, and thus

01 meet the 0.12 wt% requirement. Nevertheless, it would be
02 desirable to decrease the amount of zinc
03 dialkyldithiophosphate in lubricating oils still further,
04 thus reducing catalyst deactivation and hence increasing the
05 life and effectiveness of catalytic converters. However,
06 simply decreasing the amount of zinc dialkyldithiophosphate
07 presents problems because this necessarily lowers the
08 antiwear properties and oxidation inhibition properties of
09 the lubricating oil. Therefore, it is necessary to find a
10 way to reduce phosphorous content while still retaining the
11 antiwear and oxidation or corrosion inhibiting properties of
12 the higher phosphorous content engine oils.

13
14 In order to compensate for lowering the amount of zinc
15 dialkyldithiosphate, the use of other oxidation inhibitors
16 such as phenol derivatives and amine derivatives have been
17 studied. However, the use of such known oxidation
18 inhibitors in place of zinc dialkyldithiophosphate at best
19 only marginally satisfies the required levels of antiwear
20 and oxidation inhibition. The use of magnesium sulfonate
21 detergents which are also effective to enhance the antiwear
22 properties in valve train systems has also been studied and,
23 in fact, some commercially available engine oils use a
24 magnesium sulfonate detergent. However, engine oils
25 containing a magnesium sulfonate detergent have drawbacks in
26 that crystalline precipitates are sometimes produced when
27 these engine oils are stored under humid or variable
28 temperature conditions for a long period of time. Such
29 precipitates may cause plugging of the filter which is
30 installed in the engine oil circulating system. Such
31 plugging is more likely to occur when a large amount of the
32 magnesium sulfonate detergent is used so as to enhance the
33 desired antiwear properties. Thus, the use of magnesium
34 sulfonate detergents is not a satisfactory solution.

01 At the present time, demand for further decrease of
02 phosphorous content is very high from the viewpoint of the
03 aforementioned problems. For instance, it is sometimes
04 desired to decrease the phosphorous content to levels below
05 the regulated upper limit and the 0.1 wt. % phosphorous
06 level of today's better engine oil. This reduction cannot
07 be satisfied by the present measures in practice and still
08 meet the severe antiwear and corrosion inhibiting properties
09 required of today's engine oils.

10

11 Thus, it would be desirable to develop lubricating oils, and
12 additives and additive packages therefore, having low levels
13 of phosphorous but which still provide the needed wear
14 protection and corrosion protection now provided by
15 lubricating oils having higher levels of zinc
16 dialkyldithiophosphate, but which do not suffer from the
17 disadvantages of the low phosphorous level lubricants
18 discussed above.

19

20 U.S. Patent No. 3,876,550 (issued 1975) discloses
21 lubricating compositions containing an alkylene
22 bis(dithiocarbamate), as an antioxidant, and a substituted
23 succinic acid as a rust inhibitor. The alkylene
24 dithiocarbamate is represented in the patent by the formula
25 $R^1R^2N-C(S)-S-alkylene-S-C(S)-NR^3R^4$. Example 5 of the patent
26 describes a crankcase lubricant containing a VI improver, an
27 ashless dispersant and methylene bis(dibutyldithiocarbamate).
28 The patent further teaches that the composition may also
29 contain various other additives, for example, detergents,
30 dispersants, VI improvers, extreme pressure agents, antiwear
31 additives, etc., as well as other oxidation inhibitors and
32 corrosion inhibitors (Col. 7, lines 35-55) and cites an
33 extensive list of extreme pressure agents, corrosion
34

01 inhibitors and antioxidants, including zinc salts of
02 phosphorodithoic acid (Col. 8, lines 1-22).

03

04 The use of methylene bis(dibutyldithiocarbamate) as an
05 oxidation inhibitor in lubricating oils, in combination with
06 other ingredients, is also disclosed in U.S. Patent
07 Nos. 4,125,479 (1978) and 4,880,551 (1989).

08

09 U.S. Patent No. 4,879,054 (1989) is directed to cold
10 temperature greases and teaches using dithiocarbamates such
11 as Vanlube 7723, i.e., 4,4'-methylene bis(dithiocarbamate),
12 in such greases to provide extreme pressure antiwear
13 properties (Col. 6, lines 18-28). Examples 13-18 (Col. 14,
14 lines 26-32) describe using Vanlube 7723 and
15 triarylphosphate as replacements for lead naphthenate and
16 zinc dithiophosphate. The use of dithiocarbamates as
17 extreme pressure antiwear additives is also taught by U.S.
18 Patent No. 4,859,352, and U.S. Patent No. 4,648,985 teaches
19 that the combination of dithiocarbamates with zinc
20 dithiophosphate and copper salts of carboxylic acid provide
21 lubricants with extreme pressure properties.


22

23 SUMMARY OF THE INVENTION

24

25 The present invention provides lubricating oil compositions
26 which provide high antiwear protection and oxidation-
27 corrosion protection, but which have only low levels of
28 phosphorous, less than 0.1 wt. % and preferably not more
29 than 0.08 wt %. Thus, the present lubricating compositions
30 are much more environmentally desirable than the higher
31 phosphorous lubricating compositions generally used in
32 internal combustion engines because they facilitate longer
33 catalytic converter life and activity and yet provide the
34 desired high wear protection and corrosion inhibition.

The present lubricating composition comprises a base oil of lubricating viscosity and a wear inhibiting, corrosion inhibiting effective amount of a thiocarbamate compound, or mixture of compounds, having the formula:

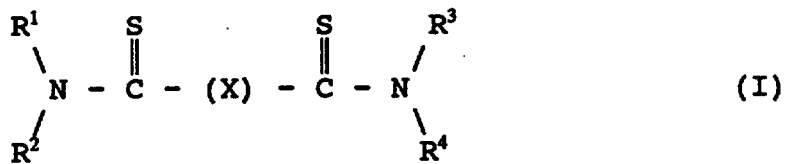

wherein each of R^1 , R^2 , R^3 and R^4 , independent of each other, represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S- CH_2 -S, S- CH_2CH_2 -S, S- $\text{CH}_2\text{CH}_2\text{CH}_2$ -S, or S- $\text{CH}_2\text{CH}(\text{CH}_3)$ -S,


and an amount of zinc dialkyldithiophosphate which provides a phosphorous content, based on the total weight of the lubricating composition, less than 0.1 and preferably not exceeding 0.08 wt. %, and more preferably not exceeding 0.06 wt. %.

In another aspect the invention provides an additive package composition or concentrate comprising one or more compounds of formula (I) in an organic diluent liquid, for example, base oil and preferably containing various other additives desired in lubricating oil compositions such as, for example, metal-containing detergents and ashless dispersants.

FURTHER DESCRIPTION OF THE INVENTION AND EMBODIMENTS

It has been found that the incorporation of the compound of formula (I) or mixtures thereof into synthetic or mineral base oils provides lubricating oils which provide excellent

01 wear protection and corrosion inhibition in internal
02 combustion engines, especially if incorporated with low
03 levels of zinc dialkyldithiophosphates. The compounds of
04 formula (I) (hereafter referred to as thiocarbamates) i.e.

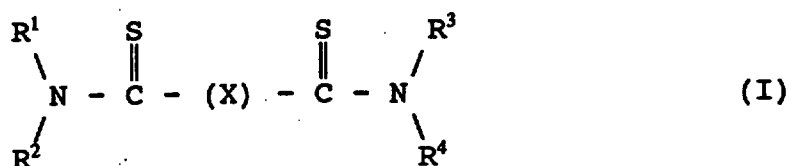

05
06
07
08
09
10
11 wherein R¹, R², R³ and R⁴ and (X) are as defined herein-
12 above,

13
14 are known compounds and can be prepared by known procedures,
15 and in some cases have been employed as vulcanizing
16 accelerators and as additives for gear oils and turbine oils
17 and hence readily commercially available. Referring to the
18 R¹, R², R³ and R⁴ groups, the alkyl group may be linear
19 (straight chain) or branched chain and preferably have 1
20 through 10 carbon atoms, more preferably 1 through 6 carbon
21 atoms. Typical alkyl groups include, for example, methyl,
22 ethyl, propyl, n-butyl, isobutyl, pentyl, isopentyl, heptyl,
23 octyl, 2-ethylhexyl, nonyl, decyl, and dodecyl. Typical
24 examples of the thiocarbamate compounds of the formula (I)
25 are methylene bis(dibutyldithiocarbamate),
26 bis(dimethylthiocarbamoyl)monosulfide,
27 bis(dimethylthiocarbamoyl)disulfide,
28 bis(dibutylthiocarbamoyl)disulfide,
29 bis(diamylthiocarbamoyl)disulfide, and
30 bis(dioctylthiocarbamoyl)disulfide. These compounds can be
31 used singly or in combination of two or more compounds in
32 combination with low levels of zinc dialkyldithiophosphates
33 and afford good wear and corrosion protection and also have
34 good oil solubility. The thiocarbamate compound is


01 generally incorporated into base oils to give a compounded
02 engine oil containing 0.05-8 wt. %, preferably 0.1-4 wt. %
03 more preferably 0.5 - 2 wt. % of the thiocarbamate compound.
04 In general, by increasing the amount of zinc
05 dialkyldithiophosphate, lower amounts of thiocarbamate,
06 within the above described ranges, can be use.

07

08 We have found that excellent results are obtained in terms
09 of both engine protection and environmental low phosphorous
10 consideration by using the thiocarbamate in combination with
11 very low levels of zinc dialkyldithiophosphate. It is
12 advantageous to use the thiocarbamate and zinc
13 dialkyldithiophosphate in combination at appropriate ratios
14 such that the phosphorous content of the compounded engine
15 oil is less than 0.1 wt. %, preferably no higher than 0.08
16 wt. %, and more preferably not higher than 0.06 wt. %, and
17 yet provides the desired levels of antiwear properties and
18 oxidation inhibition. On the other hand, in order to
19 ensure the high wear protection and corrosion inhibition
20 required by both today's and future engines, we have found
21 that the amount of zinc dialkyldithiophosphate expressed in
22 terms of phosphorous content should provide a phosphorous
23 content of about from 0.03 to 0.09 wt. %, preferably 0.04 to
24 0.08 wt. % based on the total weight of the lubricating oil
25 composition. We have discovered that the weight ratio of
26 the thiocarbamate compound to the zinc
27 dialkyldithiophosphate should preferably be in the range of
28 1:01 to 1:20 and more preferably in the range of from 1:0.2
29 to 1:10. Best results, in terms of the aforementioned
30 considerations, are obtained when the lubricating
31 composition has a phosphorous content, furnished by the zinc
32 dialkyldithiophosphate, of from 0.05 to 0.07 wt. % and the
33 weight ratio of the thiocarbamate compound of formula (I) to
34 the zinc dialkyldithiophosphate is in the range of about

from 1:0.2 to 1:10. (It should perhaps be noted that because of the phosphorus catalyst poisoning problem, that with the exception of zinc dialkyldithiophosphate, that phosphorus containing compounds are avoided in such engine oils, particularly those intended for use in automotive engines. Thus, in the case of the present invention, phosphorus content is calculated based on the zinc dialkyldithiophosphate and its molecular phosphorus content, and directly equates to zinc dialkyldithiophosphate content.)

Zinc dialkyldithiophosphates are, of course, known wear inhibiting agents and can be obtained from commercial sources or, if desired, prepared by known procedures. As is well known, zinc dialkyldithiophosphates refer to a class of compounds generally having the formula

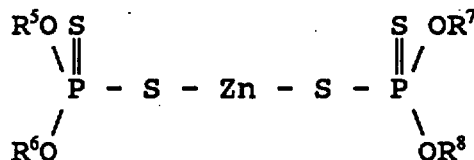

wherein R⁵, R⁶, R⁷ and R⁸ are independently alkyl or alkylphenyl.

Typically the alkyl group has about from 1 to 20 carbon atoms, preferably 3 to 10 carbon atoms, and can be straight chained or branched. In the present invention we have found that very good results are obtained using zinc dialkyldithiophosphates wherein the R groups are branched alkyl having about 3 to 6 carbon atoms. A variety of zinc dialkyldithiophosphates are, for example, described in an article by M. Born et al. entitled "Relationship between Chemical Structure and Effectiveness of Some Metallic

01 Dialkyl- and Diaryl-dithiophosphates in different Lubricated
02 Mechanisms", appearing in Lubrication Science 4-2 January
03 1992, see for example pages 97-100.

04

05 The base oil may be a mineral oil or synthetic oil or a
06 blend of mineral oils and/or synthetic oils blended to give
07 a base oil of the desired internal combustion engine oil
08 viscosity. Typically, individually the oils used as its
09 base oil will have a viscosity range of about from 10 to 120
10 cST at 40°C and will be selected or blended depending on the
11 desired end use and the additives in the finished oil to
12 give the desired grade of engine oil.

13

14 Preferably, as well as the thiocarbamate compound and zinc
15 dialkyldithiophosphate and base oil, the lubricating oil
16 composition will also contain various additives for
17 imparting auxiliary functions, for example, metal-containing
18 detergents, ashless dispersants, viscosity index improvers
19 and the like, to give a finished lubricating oil in which
20 these additives are dissolved or dispersed. A variety of
21 metal-containing detergents, ashless dispersants, and
22 viscosity index improvers are known and commercially
23 available. These additives, or their analogous compounds,
24 can be employed for the preparation of the engine oils of
25 the invention by the usual blending procedures.

26

27 As the metal-containing detergent, a metal phenate or a
28 metal sulfonate is generally employed. Preferably, the
29 metal phenate is an alkaline earth metal salt of sulfide of
30 alkylphenol having an alkyl group of approximately 8-30
31 carbon atoms. Generally employed alkaline earth metals are
32 calcium, magnesium and barium. Preferably the metal
33 sulfonate is an alkaline earth metal salt of a sulfonated
34 aromatic compound or a sulfonated mineral oil having a

01 molecular weight of approximately 400-600. Generally
02 employed alkaline earth metals are also calcium, magnesium
03 and barium. The metal phenate and metal sulfonate can be
04 used singly or in combination. Also employed are other
05 metal-containing detergents such as salicylates,
06 phosphorates and naphthenates of alkaline earth metals.
07 These detergents can be employed singly or in combination.
08 The aforementioned phenate and sulfonate can be employed in
09 combination with these other metal-containing detergents.
10 The metal-containing detergents can be of a neutral type or
11 of an over-based better type having an alkalinity value of
12 150 to 300 or more. The metal-containing detergent is
13 generally incorporated into an engine oil in an amount of
14 0.5-20 wt. % based on total weight of the engine oil (i.e.,
15 compounded oil). Although magnesium salts of phenate and
16 sulfonate may, in some cases, enhance antiwear properties,
17 they, as noted above, have a storage stability problem. In
18 consideration of this problem, it is generally preferred to
19 use calcium salts (e.g., phenates, sulfonates, etc.) in
20 combination with the thiocarbamate compounds used in the
21 present invention.

22
23 Examples of the ashless dispersants which may be used in the
24 present engine oil are alkyl or alkenyl substituted
25 succinimides, succinic esters and benzylamines, in which the
26 alkyl or alkenyl group has a molecular weight of
27 approximately 700-3,000. The derivatives of these
28 dispersants, e.g., borated dispersants, may also be used.
29 The ashless dispersant is generally incorporated into an
30 engine oil in an amount of 0.5-15 wt. % per total amount of
31 the engine oil.

32
33 Examples of the viscosity index improvers are poly-(alkyl
34 methacrylate), ethylene-propylene copolymer, polyisoprene,

01 and styrene-butadiene copolymer. Viscosity index improvers
02 of dispersant type (having increased dispersancy) or
03 multifunctional type are also employed. These viscosity
04 index improvers can be used singly or in combination. The
05 amount of viscosity index improver to be incorporated into
06 the engine oil varies with viscosity requirements of the
07 engine oil, but generally in the range of about 0.5 to 20%
08 by weight of the total weight of the engine oil lubricating
09 composition.

10

11 As well as the above additives, the lubricating oil
12 composition may contain various other additives such as, for
13 example, extreme pressure agents, corrosion inhibitors, rust
14 inhibitors, friction modifiers, anti-foaming agents, and
15 pour point depressants. Other oxidation inhibitors such as
16 hindered phenols and other antiwear agents can be used in
17 combination with the thiocarbamate compound of formula (I).

18

19 In another embodiment of the invention, the thiocarbamate of
20 formula (I) and zinc dialkyldithiophosphate may be provided
21 as an additive package or concentrate which will be
22 incorporated into a base oil at a different site or time.
23 The package will contain the two aforementioned components
24 in the weight ratio previously specified for incorporation
25 into the base oil and generally will also contain a
26 compatible diluent or carrier liquid, e.g., base oil.
27 Typically a neutral oil having a viscosity of about
28 4-8.5 cST at 100°C preferably 4-6 cST at 100°C will be used
29 as the diluent, though synthetic oils, as well as other
30 organic liquids which are compatible with the additives and
31 finished lubricating oil can also be used. The additive
32 package will also typically contain one or more of the
33 various other additives, referred to above, in the desired
34

01 amounts and ratios to facilitate direct combination with the
02 requisite amount of base oil.

03

04 Preferably, the additive concentrate comprises a
05 metal-containing detergent, an ashless dispersant and an
06 alkylthiocarbamate compound of the formula (I), zinc
07 dialkyldithiophosphate and optional components dissolved or
08 dispersed in an organic liquid diluent, at a high
09 concentration. The additive concentrate is preferably
10 prepared by mixing 100 weight parts of a metal-containing
11 detergent, 10-700 weight parts of an ashless dispersant, and
12 2-200 weight parts of the thiocarbamate compound of the
13 formula (I) plus a proportional amount of zinc
14 dialkyldithiophosphate. In some cases it may be desirable
15 to omit the viscosity index improver, depending on the
16 particular type, because of compatibility problems which may
17 occur at the high additive concentration used in the
18 additive package.

19

20 A further understanding of the invention can be had from the
21 following non-limiting examples.

22

23

EXAMPLES

24

25 At present, the performances of engine oils are evaluated by
26 various bench scale tests and engine tests. Typical
27 standard engine tests are conducted according to
28 requirements of API service classifications. The maximum
29 class for engine oils of motor cars for service stations is
30 named API-SG. In order to pass the requirements defined in
31 API-SG, evaluations using engines fixed on beds, which are
32 named SEQ. (sequence) IID, SEQ IIIE, SEQ VE, CAT 1H₂ and CRC
33 L-38 are generally conducted. In some instances a CAT 1H₂
34

01 (fixed bed test for eval
02 conducted.

03

04 The commercially avail
05 API-SG oil contain zir
06 corresponding to the
07 0.1 wt. %. It has b
08 dialkydithiophosphat
09 phosphorous content
10 results in the eva
11 defined in the SEQ
12 give poor results
13 defined in the SF
14 oil fails to pas

15

16

17

18 The most sever
19 test and, acc
20 example were
21 commercial s
22 Formulation
23 the SEQ II?

24

25 The SEQ I
26 General N
27 for 64 h
28 conduct
29 at an e
30 of val
31 increa
32 avera
33 lift

34

01 The CAT 1H₂ test is performed
02 diesel engine of Caterpillar
03 480 hours using gas oil conta
04 test is conducted for examini
05 temperature. This test measur
06 fill), WTD (weighted total dem
07 operation and 480 hours operati

08
09 The SEQ VE test is performed in
10 Motor Co. (L-4, OHC) using lead-1
11 operated cyclicly for 288 hours.
12 examining detergency for engines s
13 produce sludge in the operations a
14 temperatures as well as examining w
15 system. If the wear of the valve tr
16 large amount of iron in the form of
17 produced through the wear of the valv
18 dispersed in the engine oil employed
19 production of sludge. This test measu
20 rocker cover sludge, engine varnish, p
21 cam wear (average) and cam wear (maximum

22
23 The engine oil formulations and the resu
24 are set forth in Table 1. Also presented
25 pass limits for the respective engine test
26 grading points (in terms of merit) or meas

27
28 Details of the additives used are described
29 oil was a paraffinic mineral oil having a vi
30 value (VI value) of 100. The engine oil was
31 give viscosity conditions of SAE 10W30 define
32 Service Classification. Supplemental additive
33 anti-foaming agents were added if required.
34

The CAT 1H₂ test is performed in 2.2 liter monocylinder diesel engine of Caterpillar Inc. which is operated for 480 hours using gas oil containing 0.4% of sulfur. This test is conducted for examining detergency at an elevated temperature. This test measures TGF (top groove carbon fill), WTD (weighted total demerit), each for 240 hours operation and 480 hours operation.

The SEQ VE test is performed in a 2.3 liter engine of Ford Motor Co. (L-4, OHC) using lead-free gasoline, which is operated cyclicly for 288 hours. This test is made for examining detergency for engines such as a tendency to produce sludge in the operations at low and middle temperatures as well as examining wear of the valve train system. If the wear of the valve train system is high, a large amount of iron in the form of microparticles which are produced through the wear of the valve train system are dispersed in the engine oil employed so as to accelerate production of sludge. This test measures engine sludge, oil cover sludge, engine varnish, piston skirt varnish, wear (average) and cam wear (maximum).

Engine oil formulations and the results of the testing set forth in Table 1. Also presented in Table 1 are the limits for the respective engine tests in the form of rating points (in terms of merit) or measured value.

Some of the additives used are described below. The base oil is a paraffinic mineral oil having a viscosity index (VI value) of 100. The engine oil was formulated to viscosity conditions of SAE 10W30 defined in the API Classification. Supplemental additives such as cleaning agents were added if required.

e

).

ate)

alkyl

or
amine).

ie

sant type

ype.

		Table 1 (Formulations)					
	Engine Oil Tested	API-SG Commercial Products	Formulated Engine Oils				
			No. 1	No. 2	No. 3	No. 4	No. 5 No. 6
01							
02							
03							
04							
05							
06							
07	Viscosity Grade		----- SAE 10W30 -----				
08	Phosphorous Content (wt. %)	0.1	----- 0.056 -----				
09							
10							
11	Additives (wt. %)						
12	Metallic detergent	2.5	2.5	2.5	2.5	2.5	2.5
13	Ashless dispersant	5.8	5.8	6.8	5.8	5.8	5.8
14		---	---	---	---	1.0	0.3
15	Thiocarbamate	1.3	0.7	0.7	0.7	0.7	0.7
16	ZnDTP	1.0	1.3	1.3	1.6	1.3	0.7
17	Oxidation inhibitor	---	---	---	1.0	0.3	---
18		6.3	6.3	6.3	6.3	6.3	6.3
19	EP agent	0.4	0.4	0.4	0.4	0.4	0.4
20	VI improver						
21	Pour point depressant						
22							
23							
24							

Table 1 (Test Results)

	Engine Oil Tested	API-SG Commercial Product	Formulated Engine Oils						
			No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	
02	<u>SEQ VE (Pass limit)</u>								
03									
04									
05									
06									
07									
08	Sludge Average (≥ 9.0)	9.4	6.9	6.8	7.2	9.0	9.2	7.4	
09	Rocker Cover (≥ 7.0)	8.9	5.6	5.5	4.4	8.0	8.1	6.6	
10	Varnish (≥ 5.0)	6.4	6.3	5.5	7.5	6.8	6.6	6.5	
11	Average								
12	Piston Skirt (≥ 6.5)	7.1	7.4	7.3	7.2	6.8	7.5	6.5	
13	Cam Wear (≤ 5)	1	14	16	11	5	=	10	
14	Average								
15	Maximum (≤ 15)	1	20	20	16	11	1	14	
16									

Table 1 (Test Results Cont'd)

Engine Oil Tested	API-SG Commercial Products					No. 1	No. 2	No. 3	No. 4	No. 5
<u>SEO IIIIE (Pass limit)</u>										
Viscosity Increase (≤ 375)	330	542	---	---	---				---	223
Land Deposit (≥ 3.5)	4.4	6.0	---	---	---				---	6.8
Varnish (≥ 8.9)	9.0	9.0	---	---	---				---	9.0
Average Sludge (≥ 9.2)	9.5	9.4	---	---	---				---	9.5
Cam Lifter Wear Average (≤ 30)	13	21	---	---	---				---	7
Maximum (≤ 64)	16	27	---	---	---				---	17

Table 1 (Test Results Cont'd)

	API-SG Commercial Product	Formulated Engine Oils				
	Engine Oil Tested	No. 1	No. 2	No. 3	No. 4	No. 5
06	<u>CAT 1H₂ (Pass limit)</u>					
07	240 hours	2	---	---	---	9
08	TGF					
09	WTD	81	91	---	---	51
10	480 hours					
11	TGF (≤ 45)	8	3	---	---	16
12	WTD (≤ 140)	151	182	---	---	140

01 As can be seen from Table 1 seven formulated engine oils
02 were tested i.e., one a commercial engine oil meeting API-SG
03 requirements but having a phosphorous content of 0.1 wt. %
04 due to 1.3 wt. % zinc dialkyldithiophosphate and six test
05 formulations in which the zinc dialkyldithiophosphate
06 content was reduced to 0.7 wt. % thus reducing the
07 phosphorous content to 0.056 wt. %. Formulation Nos. 4 and
08 5 represent compositions according to the present invention.
09 Formulation Nos. 1-3 represent comparative formulations
10 which do not contain a compound of formula (I). Formulation
11 No. 6 represents a formulation containing the same
12 thiocarbamate as Formulation Nos. 4 and 5, but in a
13 substantially reduced amount. The only formulations which
14 passed all of the tests of the SEQ VE were the commercial
15 lubricating oil having a phosphorous content of 0.1 wt. %
16 and Formulation Nos. 4 and 5 of the present invention.
17 Formulation No. 3 was identical to Formulation No. 4 with
18 the exception that Formulation No. 4 contained 1 wt. % of
19 the thiocarbamate in accordance with the present invention,
20 whereas Formulation No. 3 had higher levels of an oxidation
21 inhibitor and an extreme pressure agent (1 wt. % versus
22 0.3 wt. % for Formulation No. 4), yet Formulation No. 3
23 failed four of the six tests. Formulation No. 5 was
24 identical to Comparative Formulation Nos. 1 and 2 with the
25 exception that Formulation No. 5 contained 0.7 wt. % of the
26 thiocarbamate, in accordance with the present invention,
27 whereas Formulation Nos. 1 and 2 contained higher levels of
28 the oxidation inhibitor and Formulation No. 2 also contained
29 more ashless dispersant. Again, Formulation Nos. 1 and 2
30 failed four of the six tests whereas Formulation No. 5
31 passed each test. Formulation No. 6 did not contain
32 sufficient thiocarbamate to provide the desired wear and
33 corrosion protection because of the very low amount of zinc
34

01 dialkyldithiophosphate (i.e., measured as phosphorus 0.056
02 wt. %).

03

04 Based on the test data set forth in Table 1, engine oil
05 No. 4 and No. 5 of the present invention satisfy the SEQ VE
06 requirements of API-SG (top grade for commercially available
07 engine oils), even though the phosphorous contents of these
08 engine oils are extremely low i.e., 0.056 wt. %. In
09 contrast, the engine oils No. 1, No. 2 and No. 3 containing
10 no thiocarbamate compound could not pass the pass limits set
11 for the API-SG classification. Particularly, the latter
12 engine oils showed apparently poorer performances in cam
13 wear and prevention of sludge, as compared with the
14 commercially available API-SG engine oil and the engine oil
15 according to the present invention. The engine oils of the
16 invention showed excellent performances in the anti-wear and
17 oxidation inhibition characteristics even at a phosphorous
18 content reduced to about half of the generally adopted
19 content. The observed performances were almost the same as
20 those of a representative commercially available top-grade
21 engine oil.

22

23 Example 2

24

25 In this example a higher phosphorous level engine oil,
26 according to the invention, but containing only 0.2 wt. % of
27 the same thiocarbamate used in Example 1, was tested using
28 the SEQ VE test described in Example 1. A comparison
29 formulation was also tested. The two formulations were both
30 0.09 wt. % phosphorous, provided by zinc
31 dialkyldithiophosphate, SAE 5W30 oils and were identical
32 except that Formulation 7 contained 0.2 wt. % thiocarbamate
33 and 0.3 wt. % oxidation inhibitor whereas Formulation 8
34 contained no thiocarbamate and 0.8 wt. % oxidation

01 inhibitor. The engine oil formulations and the results of
02 the testing are set forth in Table 2.

03

04 Details of the additives used are described below. The base
05 oil was a paraffinic mineral oil having a viscosity index
06 value of 100. The engine oil's viscosity grade was SAE
07 5W30. Supplemental additives such as anti-foaming agents
08 were added.

09

10 Additives:

11

12 Metallic detergent - Mixture of overbased calcium phenate,
13 overbased calcium sulfonate and neutral calcium sulfonate.

14

15 Ashless dispersant - Boric acid-modified succinimide but
16 different from one in Example 1.

17

18 Thiocarbamate - Same as in Example 1.

19

20 ZnDTP - Zinc dialkyldithiophosphate of secondary alkyl type
21 (alkyl carbon atom number: 4 to 6).

22

23 Oxidation inhibitor - Mixture of dialkyldiphenylamine and
24 molybdenum inhibitor.

25

26 VI improver - Dispersant polymethacrylate type.

27

28

29

30

31

32

33

34

Table 2 (Formulations)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
Viscosity Grade	-----SAE 5W30-----	
Phosphorous (wt. %)	-----0.09-----	
Additives (wt. %)		
Metallic Detergent	2.7	2.7
Ashless Dispersant	5.4	5.4
Thiocarbamate	0.2	---
ZnDTP	1.3	1.3
Oxidation Inhibitor	0.3	0.8
VI improver	5.6	5.6

Table 2 (Test Results)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
<u>SEO VE (Pass limit)</u>		
Sludge Average (≥ 9.0)	9.4	7.1
Rocker Cover (≥ 7.0)	9.1	6.7
Varnish Average (≥ 5.0)	6.2	5.8
Piston Skirt (≥ 6.5)	7.4	7.5
Cam Wear Average (≤ 5)	2	9
Maximum (≤ 15)	7	18

01 As can be seen from the results shown in Table 2, at the
02 0.09 wt. % phosphorous level 0.2 wt. % thiocarbamate was
03 effective, in combination with the zinc
04 dialkyldithiophosphate, to pass the SEQ VE requirements,
05 whereas the identical composition containing the same amount
06 of zinc dialkyldithiophosphate but without the thiocarbamate
07 failed four of the six tests in the SEQ VE and particularly
08 so with respect to cam wear.

09

10 Obviously, many modifications and variations of the
11 invention described hereinabove or below can be made without
12 departing from the essence and scope thereof.

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34




01 WHAT IS CLAIMED IS:

02

- 03 1. A low phosphorous lubricating oil composition for
04 internal combustion engines, which comprises a major
05 amount of a base oil of lubricating viscosity, a wear
06 inhibiting and corrosion inhibiting effective amount of
07 a zinc dialkyldithiophosphate wear inhibitor and a
08 thiocarbamate antiwear agent selected from the group of
09 compounds having the formula:

10

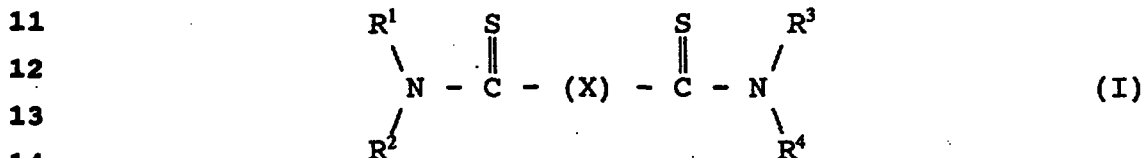

15 wherein each of R^1 , R^2 , R^3 and R^4 independently
16 represents an alkyl group of 1-18 carbon atoms, and (X)
17 represents S, S-S, S-CH₂-S, S-CH₂CH₂S,
18 S-CH₂CH₂CH₂-S, or S-CH₂-CH(CH₃)-S; and mixtures thereof,

19

20 and wherein the weight ratio of said thiocarbamate
21 antiwear agent to said zinc dialkyldithiophosphate wear
22 inhibitor is in the range of about from 1:0.2 to 1:10
23 and wherein said composition has a phosphorous content
24 of about from 0.03 to 0.09 wt. %, and wherein said
25 phosphorous content is attributable to the phosphorous
26 content of said zinc dialkyldithiophosphate.

27

- 28 2. The low phosphorous lubricating oil composition of
29 Claim 1 wherein said composition comprises an ashless
30 dispersant, a metal-containing detergent, and a
31 viscosity index improver.


32

- 33 3. The low phosphorous lubricating oil composition of


34



- 01 Claim 2 wherein R¹, R², R³ and R⁴ are independently
02 selected from alkyl groups having 1 to 6 carbon atoms.
03
- 04 4. The low phosphorous oil composition of Claim 1 wherein
05 said thiocarbamate antiwear agent is methylene
06 bis(dibutyldithiocarbamate) and the zinc
07 dialkyldithiophosphate is a secondary alkyl type.
08
- 09 5. The low phosphorous oil composition of Claim 3 wherein
10 said thiocarbamate antiwear agent is methylene
11 bis(dibutyldithiocarbamate) and the zinc
12 dialkyldithiophosphate is a secondary alkyl type.
13
- 14 6. The low phosphorous oil composition of Claim 1 wherein
15 the ratio of said thiocarbamate antiwear agent to said
16 zinc dialkyldithiophosphate is in the range of 1:0.3 to
17 1:7.
18
- 19 7. The low phosphorous oil composition of Claim 5 wherein
20 the ratio of said thiocarbamate antiwear agent to said
21 zinc dialkyldithiophosphate is in the range of 1:0.3 to
22 1:7.
23
- 24 8. The low phosphorous lubricating oil composition of
25 Claim 1 wherein said composition contains 0.05 -
26 8 wt. % of said thiocarbamate antiwear agent.
27
- 28 9. The low phosphorous lubricating oil composition of
29 Claim 1 wherein said composition contains 0.1 - 4 wt. %
30 of said thiocarbamate antiwear agent.
31
- 32 10. The low phosphorous lubricating oil composition of
33 Claim 1 wherein said composition contains 0.2 - 2 wt. %
34 of said thiocarbamate antiwear agent.



- 01 11. An additive concentrate for use in internal combustion
02 engine oils comprising a zinc dialkyldithiophosphate
03 wear inhibitor and a thiocarbamate antiwear agent
04 selected from the group of compounds having the
05 formula:

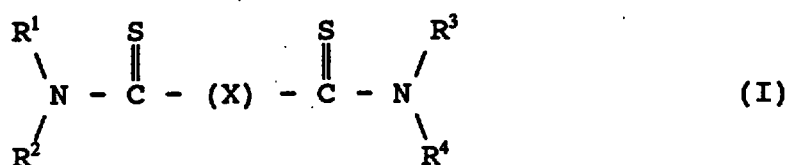

11
12 wherein each of R^1 , R^2 , R^3 and R^4 independently
13 represents an alkyl group of 1-18 carbon atoms, and (X)
14 represents S, S-S, S-CH₂-S, S-CH₂-CH₂-S, S-CH₂-CH₂-CH₂-S,
15 or S-CH₂-CH(CH₃)-S; and mixtures thereof,

16
17 and a minor amount of a compatible liquid diluent and
18 wherein the weight ratio of said thiocarbamate antiwear
19 agent to said zinc dialkyldithiophosphate wear
20 inhibitor is in the range of about from 1:0.2 to 1:10.


- 21
22 12. The concentrate of Claim 11 wherein said concentrate
23 comprises a metal-containing detergent and an ashless
24 dispersant.
25
26 13. The concentrate of Claim 11 wherein said thiocarbamate
27 antiwear agent is methylene
28 bis(dibutyldithiocarbamate).
29
30 14. The concentrate of Claim 11 wherein the ratio of said
31 thiocarbamate antiwear agent to said zinc
32 dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.
33
34

01 15. The concentrate of Claim 12 wherein the ratio of said
02 thiocarbamate antiwear agent to said zinc
03 dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34



ABSTRACT OF THE DISCLOSURE

A low phosphorous lubricating oil composition for internal combustion engines comprising an alkylthiocarbamate compound of the formula:

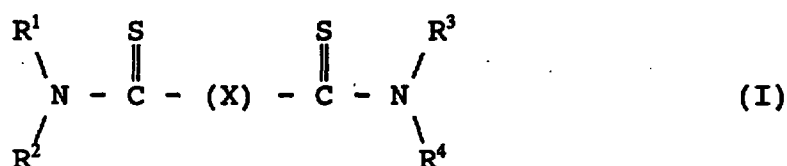

wherein each of R^1 , R^2 , R^3 , and R^4 independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S- CH_2 -S, S- CH_2CH_2 -S, S- $\text{CH}_2\text{CH}_2\text{CH}_2$ -S, or S- $\text{CH}_2\text{CH}(\text{CH}_3)$ -S,

and additive compositions and additive packages utilizing the above compound.

REPLACED SHEETS		SG
☒	Description	: paged 1 to paged 24
☒	Claim(s)	: paged 27 to paged 30
☐	Drawing(s)	: paged to paged
☐	Abstract	: paged to paged
DATE OF RECEIPT		

-1-

REPLACEMENT SHEETS		SG
☒	Description	: paged 1 to paged 24
☒	Claim(s)	: paged 27 to paged 30
☐	Drawing(s)	: paged to paged
☒	Abstract	: paged to paged
DATE OF RECEIPT 13/12/96		

LOW PHOSPHOROUS ENGINE OIL COMPOSITION
AND ADDITIVE COMPOSITIONS

BACKGROUND OF INVENTION

This invention relates to improved lubricating oils, especially internal combustion engine lubricating oils, and additives and additives mixtures employable for the preparation of such lubricating oils.

Automobile spark ignition and diesel engines have valve train systems, including valves, cams and rocker arms which present special lubrication concerns. It is extremely important that the lubricant, i.e. the engine oil, protects these parts from wear. Further, it is important for engine oils to suppress the production of deposits in the engines. Such deposits are produced from non-combustibles and incomplete combustibles of hydrocarbon fuels (e.g., gasoline, diesel fuel oil) and by the deterioration of the engine oil employed.

Engine oils use a mineral oil or a synthetic oil as a base oil. However, simple base oils alone do not provide the necessary properties to provide the necessary wear protection, deposit control, etc. required to protect internal combustion engines. Thus, base oils are formulated with various additives, for imparting auxiliary functions, such as ashless dispersants, metallic detergents (i.e., metal-containing detergents), antiwear agents, antioxidants (i.e., oxidation inhibitors), viscosity index improvers and the like to give a compounded oil (i.e., a lubricating oil composition).

A number of such engine oil additives are known and employed in practice. Zinc dialkyldithiophosphates are, for example, because of their favorable characteristics as an antiwear agent and performance as an oxidation inhibitor, contained

This Sheet Has Been Replaced



REPLACEMENT SHEET
13 DEC 1996

13 DEC 1996

in most all of the commercially available internal-composition engine oils, especially those used for automobiles.

However, a problem has arisen with respect to the use of zinc dialkyldithiophosphate, because phosphorous derivatives poison catalyst components of catalytic converters. This is a major concern, because effective catalytic converters are needed to reduce pollution and to meet governmental regulation designed to reduce toxic gases, such as hydrocarbons, carbon monoxide, and nitrogen oxides, in internal combustion engine exhaust emission. Such catalytic converters generally use a combination of catalytic metals, such as platinum or variations, and metal oxides and are installed in the exhaust streams, e.g., the exhaust pipes of automobiles, to convert the toxic gases to nontoxic gases. As before mentioned these catalyst components are poisoned by the phosphorous component, or the phosphorous decomposition products of the zinc dialkyldithiophosphate; and accordingly, the use of engine oils containing phosphorous additives may substantially reduce the life and effectiveness of catalytic converters. Therefore, it would be desirable to reduce the phosphorous content in the engine oils so as to maintain the activity and extend the life of the catalytic converter.

There is also governmental and automotive industry pressure towards reducing phosphorous content; for example, United States Military Standards MIL-L-46152E and the ILSAC Standards defined by the Japanese and United States Automobile Industry Association require engine oils to have phosphorous content below 0.12 wt. %. The phosphorous content in most high grade engine oils containing zinc dialkyldithiophosphate is approximately 0.1 wt. %, and thus

This Sheet Has Been Replaced




13 DEC 1996

meet the 0.12 wt% requirement. Nevertheless, it would be desirable to decrease the amount of zinc dialkyldithiophosphate in lubricating oils still further, thus reducing catalyst deactivation and hence increasing the life and effectiveness of catalytic converters. However, simply decreasing the amount of zinc dialkyldithiophosphate presents problems because this necessarily lowers the antiwear properties and oxidation inhibition properties of the lubricating oil. Therefore, it is necessary to find a way to reduce phosphorous content while still retaining the antiwear and oxidation or corrosion inhibiting properties of the higher phosphorous content engine oils.

In order to compensate for lowering the amount of zinc dialkyldithiophosphate, the use of other oxidation inhibitors such as phenol derivatives and amine derivatives have been studied. However, the use of such known oxidation inhibitors in place of zinc dialkyldithiophosphate at best only marginally satisfies the required levels of antiwear and oxidation inhibition. The use of magnesium sulfonate detergents which are also effective to enhance the antiwear properties in valve train systems has also been studied and, in fact, some commercially available engine oils use a magnesium sulfonate detergent. However, engine oils containing a magnesium sulfonate detergent have drawbacks in that crystalline precipitates are sometimes produced when these engine oils are stored under humid or variable temperature conditions for a long period of time. Such precipitates may cause plugging of the filter which is installed in the engine oil circulating system. Such plugging is more likely to occur when a large amount of the magnesium sulfonate detergent is used so as to enhance the desired antiwear properties. Thus, the use of magnesium sulfonate detergents is not a satisfactory solution.

This Sheet Has Been Replaced



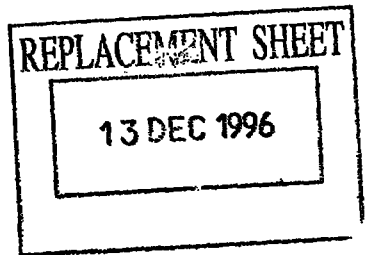


At the present time, demand for further decrease of phosphorous content is very high from the viewpoint of the aforementioned problems. For instance, it is sometimes desired to decrease the phosphorous content to levels below the regulated upper limit and the 0.1 wt. % phosphorous level of today's better engine oil. This reduction cannot be satisfied by the present measures in practice and still meet the severe antiwear and corrosion inhibiting properties required of today's engine oils.

Thus, it would be desirable to develop lubricating oils, and additives and additive packages therefore, having low levels of phosphorous but which still provide the needed wear protection and corrosion protection now provided by lubricating oils having higher levels of zinc dialkyldithiophosphate, but which do not suffer from the disadvantages of the low phosphorous level lubricants discussed above.

U.S. Patent No. 3,876,550 (issued 1975) discloses lubricating compositions containing an alkylene bis(dithiocarbamate), as an antioxidant, and a substituted succinic acid as a rust inhibitor. The alkylene dithiocarbamate is represented in the patent by the formula $R^1R^2N-C(S)-S-alkylene-S-C(S)-NR^3R^4$. Example 5 of the patent describes a crankcase lubricant containing a VI improver, an ashless dispersant and methylene bis(dibutyldithiocarbamate). The patent further teaches that the composition may also contain various other additives, for example, detergents, dispersants, VI improvers, extreme pressure agents, antiwear additives, etc., as well as other oxidation inhibitors and corrosion inhibitors (Col. 7, lines 35-55) and cites an extensive list of extreme pressure agents, corrosion





inhibitors and antioxidants, including zinc salts of phosphorodithioic acid (Col. 8, lines 1-22).

The use of methylene bis(dibutyldithiocarbamate) as an oxidation inhibitor in lubricating oils, in combination with other ingredients, is also disclosed in U.S. Patent Nos. 4,125,479 (1978) and 4,880,551 (1989).

U.S. Patent No. 4,879,054 (1989) is directed to cold temperature greases and teaches using dithiocarbamates such as Vanlube 7723, i.e., 4,4'-methylene bis(dithiocarbamate), in such greases to provide extreme pressure antiwear properties (Col. 6, lines 18-28). Examples 13-18 (Col. 14, lines 26-32) describe using Vanlube 7723 and triarylphosphate as replacements for lead naphthenate and zinc dithiophosphate. The use of dithiocarbamates as extreme pressure antiwear additives is also taught by U.S. Patent No. 4,859,352, and U.S. Patent No. 4,648,985 teaches that the combination of dithiocarbamates with zinc dithiophosphate and copper salts of carboxylic acid provide lubricants with extreme pressure properties.

SUMMARY OF THE INVENTION


The present invention provides lubricating oil compositions which provide high antiwear protection and oxidation-corrosion protection, but which have only low levels of phosphorous, less than 0.1 wt. % and preferably not more than 0.08 wt %. Thus, the present lubricating compositions are much more environmentally desirable than the higher phosphorous lubricating compositions generally used in internal combustion engines because they facilitate longer catalytic converter life and activity and yet provide the desired high wear protection and corrosion inhibition.

This Sheet Has Been Replaced



13 DEC 1996

The present lubricating composition comprises a base oil of lubricating viscosity and a wear inhibiting, corrosion inhibiting effective amount of a thiocarbamate compound, or mixture of compounds, having the formula:

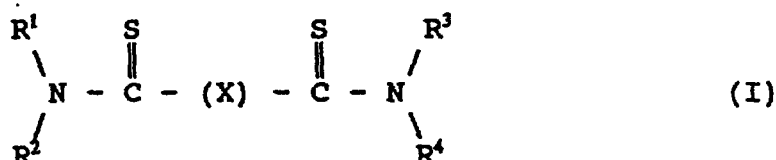

wherein each of R^1 , R^2 , R^3 and R^4 , independent of each other, represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S- CH_2 -S, S- CH_2CH_2 -S, S- $\text{CH}_2\text{CH}_2\text{CH}_2$ -S, or S- $\text{CH}_2\text{CH}(\text{CH}_3)$ -S,


and an amount of zinc dialkyldithiophosphate which provides a phosphorous content, based on the total weight of the lubricating composition, less than 0.1 and preferably not exceeding 0.08 wt. %, and more preferably not exceeding 0.06 wt. %.

In another aspect the invention provides an additive package composition or concentrate comprising one or more compounds of formula (I) in an organic diluent liquid, for example, base oil and preferably containing various other additives desired in lubricating oil compositions such as, for example, metal-containing detergents and ashless dispersants.

FURTHER DESCRIPTION OF THE INVENTION AND EMBODIMENTS

It has been found that the incorporation of the compound of formula (I) or mixtures thereof into synthetic or mineral base oils provides lubricating oils which provide excellent


This Sheet Has Been Replaced



13 DEC 1996

-7-

wear protection and corrosion inhibition in internal combustion engines, especially if incorporated with low levels of zinc dialkyldithiophosphates. The compounds of formula (I) (hereafter referred to as thiocarbamates) i.e.

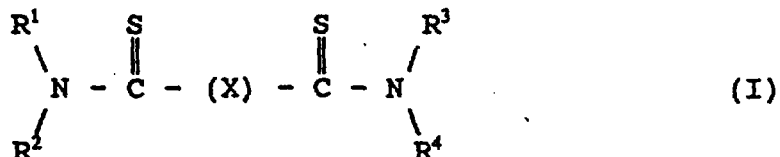


wherein R^1 , R^2 , R^3 and R^4 and (X) are as defined herein-above,

are known compounds and can be prepared by known procedures, and in some cases have been employed as vulcanizing accelerators and as additives for gear oils and turbine oils and hence readily commercially available. Referring to the R^1 , R^2 , R^3 and R^4 groups, the alkyl group may be linear (straight chain) or branched chain and preferably have 1 through 10 carbon atoms, more preferably 1 through 6 carbon atoms. Typical alkyl groups include, for example, methyl, ethyl, propyl, n-butyl, isobutyl, pentyl, isopentyl, heptyl, octyl, 2-ethylhexyl, nonyl, decyl, and dodecyl. Typical examples of the thiocarbamate compounds of the formula (I) are methylene bis(dibutyldithiocarbamate), bis(dimethylthiocarbamoyl)monosulfide, bis(dimethylthiocarbamoyl)disulfide, bis(dibutylthiocarbamoyl)disulfide, bis(diamylthiocarbamoyl)disulfide, and bis(dioctylthiocarbamoyl)disulfide. These compounds can be used singly or in combination of two or more compounds in combination with low levels of zinc dialkyldithiophosphates and afford good wear and corrosion protection and also have good oil solubility. The thiocarbamate compound is

This Sheet Has Been Replaced






generally incorporated into base oils to give a compounded engine oil containing 0.05-8 wt. %, preferably 0.1-4 wt. % more preferably 0.5 - 2 wt. % of the thiocarbamate compound. In general, by increasing the amount of zinc dialkyldithiophosphate, lower amounts of thiocarbamate, within the above described ranges, can be use.

We have found that excellent results are obtained in terms of both engine protection and environmental low phosphorous consideration by using the thiocarbamate in combination with very low levels of zinc dialkyldithiophosphate. It is advantageous to use the thiocarbamate and zinc dialkyldithiophosphate in combination at appropriate ratios such that the phosphorous content of the compounded engine oil is less than 0.1 wt. %, preferably no higher than 0.08 wt. %, and more preferably not higher than 0.06 wt. %, and yet provides the desired levels of antiwear properties and oxidation inhibition. On the other hand, in order to ensure the high wear protection and corrosion inhibition required by both today's and future engines, we have found that the amount of zinc dialkyldithiophosphate expressed in terms of phosphorous content should provide a phosphorous content of about from 0.03 to 0.09 wt. %, preferably 0.04 to 0.08 wt. % based on the total weight of the lubricating oil composition. We have discovered that the weight ratio of the thiocarbamate compound to the zinc dialkyldithiophosphate should preferably be in the range of 1:01 to 1:20 and more preferably in the range of from 1:0.2 to 1:10. Best results, in terms of the aforementioned considerations, are obtained when the lubricating composition has a phosphorous content, furnished by the zinc dialkyldithiophosphate, of from 0.05 to 0.07 wt. % and the weight ratio of the thiocarbamate compound of formula (I) to the zinc dialkyldithiophosphate is in the range of about


This Sheet Has Been Replaced





from 1:0.2 to 1:10. (It should perhaps be noted that because of the phosphorus catalyst poisoning problem, that with the exception of zinc dialkyldithiophosphate, that phosphorus containing compounds are avoided in such engine oils, particularly those intended for use in automotive engines. Thus, in the case of the present invention, phosphorus content is calculated based on the zinc dialkyldithiophosphate and its molecular phosphorus content, and directly equates to zinc dialkyldithiophosphate content.)

Zinc dialkyldithiophosphates are, of course, known wear inhibiting agents and can be obtained from commercial sources or, if desired, prepared by known procedures. As is well known, zinc dialkyldithiophosphates refer to a class of compounds generally having the formula

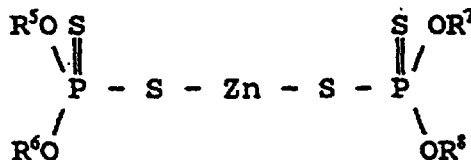


wherein R⁵, R⁶, R⁷ and R⁸ are independently alkyl or alkylphenyl.

Typically the alkyl group has about from 1 to 20 carbon atoms, preferably 3 to 10 carbon atoms, and can be straight chained or branched. In the present invention we have found that very good results are obtained using zinc dialkyldithiophosphates wherein the R groups are branched alkyl having about 3 to 6 carbon atoms. A variety of zinc dialkyldithiophosphates are, for example, described in an article by M. Born et al. entitled "Relationship between Chemical Structure and Effectiveness of Some Metallic

This Sheet Has Been Replaced



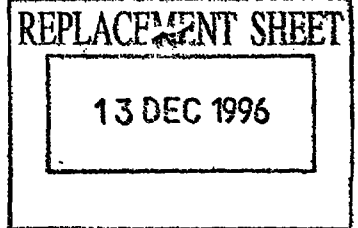

Dialkyl- and Diaryl-dithiophosphates in different Lubricated Mechanisms", appearing in Lubrication Science 4-2 January 1992, see for example pages 97-100.


The base oil may be a mineral oil or synthetic oil or a blend of mineral oils and/or synthetic oils blended to give a base oil of the desired internal combustion engine oil viscosity. Typically, individually the oils used as its base oil will have a viscosity range of about from 10 to 120 cST at 40°C and will be selected or blended depending on the desired end use and the additives in the finished oil to give the desired grade of engine oil.

Preferably, as well as the thiocarbamate compound and zinc dialkyldithiophosphate and base oil, the lubricating oil composition will also contain various additives for imparting auxiliary functions, for example, metal-containing detergents, ashless dispersants, viscosity index improvers and the like, to give a finished lubricating oil in which these additives are dissolved or dispersed. A variety of metal-containing detergents, ashless dispersants, and viscosity index improvers are known and commercially available. These additives, or their analogous compounds, can be employed for the preparation of the engine oils of the invention by the usual blending procedures.

As the metal-containing detergent, a metal phenate or a metal sulfonate is generally employed. Preferably, the metal phenate is an alkaline earth metal salt of sulfide of alkylphenol having an alkyl group of approximately 8-30 carbon atoms. Generally employed alkaline earth metals are calcium, magnesium and barium. Preferably the metal sulfonate is an alkaline earth metal salt of a sulfonated aromatic compound or a sulfonated mineral oil having a

This Sheet Has Been Replaced



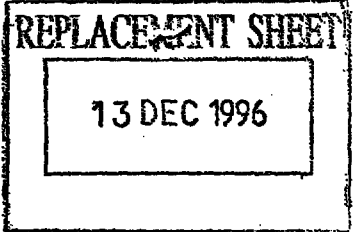

-11-


molecular weight of approximately 400-600. Generally employed alkaline earth metals are also calcium, magnesium and barium. The metal phenate and metal sulfonate can be used singly or in combination. Also employed are other metal-containing detergents such as salicylates, phosphorates and naphthenates of alkaline earth metals. These detergents can be employed singly or in combination. The aforementioned phenate and sulfonate can be employed in combination with these other metal-containing detergents. The metal-containing detergents can be of a neutral type or of an over-based better type having an alkalinity value of 150 to 300 or more. The metal-containing detergent is generally incorporated into an engine oil in an amount of 0.5-20 wt. % based on total weight of the engine oil (i.e., compounded oil). Although magnesium salts of phenate and sulfonate may, in some cases, enhance antiwear properties, they, as noted above, have a storage stability problem. In consideration of this problem, it is generally preferred to use calcium salts (e.g., phenates, sulfonates, etc.) in combination with the thiocarbamate compounds used in the present invention.

Examples of the ashless dispersants which may be used in the present engine oil are alkyl or alkenyl substituted succinimides, succinic esters and benzylamines, in which the alkyl or alkenyl group has a molecular weight of approximately 700-3,000. The derivatives of these dispersants, e.g., borated dispersants, may also be used. The ashless dispersant is generally incorporated into an engine oil in an amount of 0.5-15 wt. % per total amount of the engine oil.

Examples of the viscosity index improvers are poly-(alkyl methacrylate), ethylene-propylene copolymer, polyisoprene,

This Sheet Has Been Replaced



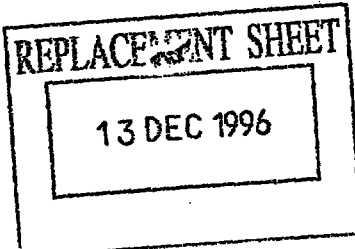

and styrene-butadiene copolymer. Viscosity index improvers of dispersant type (having increased dispersancy) or multifunctional type are also employed. These viscosity index improvers can be used singly or in combination. The amount of viscosity index improver to be incorporated into the engine oil varies with viscosity requirements of the engine oil, but generally in the range of about 0.5 to 20% by weight of the total weight of the engine oil lubricating composition.

As well as the above additives, the lubricating oil composition may contain various other additives such as, for example, extreme pressure agents, corrosion inhibitors, rust inhibitors, friction modifiers, anti-foaming agents, and pour point depressants. Other oxidation inhibitors such as hindered phenols and other antiwear agents can be used in combination with the thiocarbamate compound of formula (I).

In another embodiment of the invention, the thiocarbamate of formula (I) and zinc dialkyldithiophosphate may be provided as an additive package or concentrate which will be incorporated into a base oil at a different site or time. The package will contain the two aforementioned components in the weight ratio previously specified for incorporation into the base oil and generally will also contain a compatible diluent or carrier liquid, e.g., base oil. Typically a neutral oil having a viscosity of about 4-8.5 cST at 100°C preferably 4-6 cST at 100°C will be used as the diluent, though synthetic oils, as well as other organic liquids which are compatible with the additives and finished lubricating oil can also be used. The additive package will also typically contain one or more of the various other additives, referred to above, in the desired

This Sheet Has Been Replaced



13 DEC 1996

-13-

amounts and ratios to facilitate direct combination with the requisite amount of base oil.

Preferably, the additive concentrate comprises a metal-containing detergent, an ashless dispersant and an alkylthiocarbamate compound of the formula (I), zinc dialkyldithiophosphate and optional components dissolved or dispersed in an organic liquid diluent, at a high concentration. The additive concentrate is preferably prepared by mixing 100 weight parts of a metal-containing detergent, 10-700 weight parts of an ashless dispersant, and 2-200 weight parts of the thiocarbamate compound of the formula (I) plus a proportional amount of zinc dialkyldithiophosphate. In some cases it may be desirable to omit the viscosity index improver, depending on the particular type, because of compatibility problems which may occur at the high additive concentration used in the additive package.

A further understanding of the invention can be had from the following non-limiting examples.

EXAMPLES

At present, the performances of engine oils are evaluated by various bench scale tests and engine tests. Typical standard engine tests are conducted according to requirements of API service classifications. The maximum class for engine oils of motor cars for service stations is named API-SG. In order to pass the requirements defined in API-SG, evaluations using engines fixed on beds, which are named SEQ (sequence) IID, SEQ IIIE, SEQ VE, CAT 1H₂ and CRC L-38 are generally conducted. In some instances a CAT 1H₂

This Sheet Has Been Replaced



13 DEC 1996

(fixed bed test for evaluating diesel oils) is also conducted.


The commercially available engine oils classified into API-SG oil contain zinc dialkyldithiophosphate in an amount corresponding to the phosphorous content of approximately 0.1 wt. %. It has been observed that if the amount of zinc dialkyldithiophosphate is reduced so as to decrease the phosphorous content, the resulting engine oils show poor results in the evaluation of wear of valve train systems defined in the SEQ IIIE test and the SEQ VE test, and also give poor results in the observation of viscosity increase defined in the SEQ IIIE test. This means that such engine oil fails to pass the level defined for the API-SG class.


Example 1

The most severe of the above mentioned tests is the SEQ VE test and, accordingly, all of the formulated oils in this example were tested using the SEQ VE test. In addition, the commercial standard, comparative Formula No. 1 and Formulation 5 of the present invention were also tested by the SEQ IIIE test and CAT 1H₂ test.

The SEQ IIIE test is performed in a 3.6 liter, V-6 engine of General Motors which is operated at 149°C (oil temperature) for 64 hours using lead-containing gasoline. This test is conducted for examining oxidation stability of engine oils at an elevated temperature and property of preventing wear of valve train systems. This test measures viscosity increase (%), oil ring land deposit, piston skirt varnish, average sludge, cam plus lifter wear (average) and cam plus lifter wear (maximum).

This Sheet Has Been Replaced



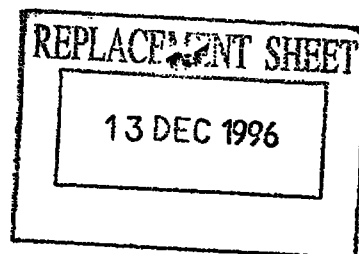

-15-


The CAT 1H₂ test is performed in 2.2 liter monocylinder diesel engine of Caterpillar Inc. which is operated for 480 hours using gas oil containing 0.4% of sulfur. This test is conducted for examining detergency at an elevated temperature. This test measures TGF (top groove carbon fill), WTD (weighted total demerit), each for 240 hours operation and 480 hours operation.

The SEQ VE test is performed in a 2.3 liter engine of Ford Motor Co. (L-4, OHC) using lead-free gasoline, which is operated cyclicly for 288 hours. This test is made for examining detergency for engines such as a tendency to produce sludge in the operations at low and middle temperatures as well as examining wear of the valve train system. If the wear of the valve train system is high, a large amount of iron in the form of microparticles which are produced through the wear of the valve train system are dispersed in the engine oil employed so as to accelerate production of sludge. This test measures engine sludge, rocker cover sludge, engine varnish, piston skirt varnish, cam wear (average) and cam wear (maximum).

The engine oil formulations and the results of the testing are set forth in Table 1. Also presented in Table 1 are the pass limits for the respective engine tests in the form of grading points (in terms of merit) or measured value.

Details of the additives used are described below. The base oil was a paraffinic mineral oil having a viscosity index value (VI value) of 100. The engine oil was formulated to give viscosity conditions of SAE 10W30 defined in the API Service Classification. Supplemental additives such as anti-foaming agents were added if required.

This Sheet Has Been Replaced

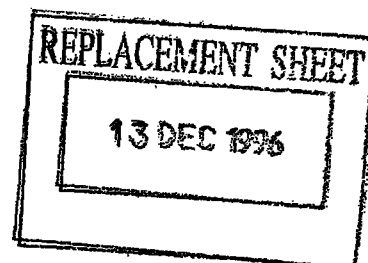Additives:

Metallic detergent - Metal-containing detergent
(mixture of overbased calcium sulfonate and neutral
calcium sulfonate).

Ashless dispersant - Boric acid-modified succinimide
(for the formulated engine oil No. 2 only,
polyisobutenyl succinic ester of 1 wt. % was added).

Thiocarbamate - Methylene bis(dibutyldithiocarbamate)
of the invention.

ZnDTP - Zinc dialkyldithiophosphate of secondary alkyl
type (alkyl carbon atom number: 3 to 6).

Oxidation inhibitor - Organic oxidation inhibitor
(mixture of hindered phenol and dialkyldiphenylamine).

EP agent - Extreme pressure agent of sulfur type
(diparaffin sulfide).

VI improver - Viscosity index improver (dispersant type
ethylene-propylene copolymer).

Pour point depressant - of polymethacrylate type.

This Sheet Has Been Replaced




Table 1 (Formulations)

Engine Oil Tested	API-SG Commercial Products	Formulated Engine Oils				
		No. 1	No. 2	No. 3	No. 4	No. 5 No. 6
Viscosity Grade						
Phosphorous Content (wt. %)	0.1					
----- SAE 10W30 -----						
----- 0.056 -----						

Additives (wt. %)						
Metallic detergent	2.5	2.5	2.5	2.5	2.5	2.5
Ashless dispersant	5.8	5.8	6.8	5.8	5.8	5.8
Thiocarbamate	---	---	---	---	1.0	0.3
ZnDTP	1.3	0.7	0.7	0.7	0.7	0.7
Oxidation inhibitor	1.0	1.3	1.3	1.6	1.3	0.7
EP agent	---	---	---	1.0	0.3	---
VI improver	6.3	6.3	6.3	6.3	6.3	6.3
Pour point depressant	0.4	0.4	0.4	0.4	0.4	0.4

-17-

REPLACEMENT SHEET

13 DEC 1996

This Sheet Has Been Replaced





Table 1 (Test Results)

Engine Oil Tested	API-SG Commercial Product	Formulated Engine Oils					
		No. 1	No. 2	No. 3	No. 4	No. 5	No. 6
<u>SEO VE (Pass limit)</u>							
Sludge Average (≥ 9.0)	9.4	6.9	6.8	7.2	9.0	9.2	7.4
Rocker Cover (≥ 7.0)	8.9	5.6	5.5	4.4	8.0	8.1	6.6
Varnish Average (≥ 5.0)	6.4	6.3	5.5	7.5	6.8	6.6	6.5
Piston Skirt (≥ 6.5)	7.1	7.4	7.3	7.2	6.8	7.5	6.5
Cam Wear Average (≤ 5)	1	14	16	11	5	1	10
Maximum (≤ 15)	1	20	20	16	11	1	14

-18-

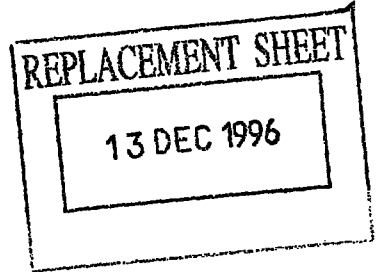

This Sheet Has Been Replaced





Table 1 (Test Results Cont'd)

API-SG Commercial Products		No. 1	No. 2	No. 3	No. 4	No. 5
Engine Oil Tested						
<u>SEO IIIIE (Pass limit):</u>						
Viscosity Increase (≤ 375)	330	542	---	---	---	223
Land Deposit (≥ 3.5)	4.4	6.0	---	---	---	6.8
Varnish (≥ 8.9)	9.0	9.0	---	---	---	9.0
Average Sludge (≥ 9.2)	9.5	9.4	---	---	---	9.5
Cam Lifter Wear Average (≤ 30)	13	21	---	---	---	7
Maximum (≤ 64)	16	27	---	---	---	17

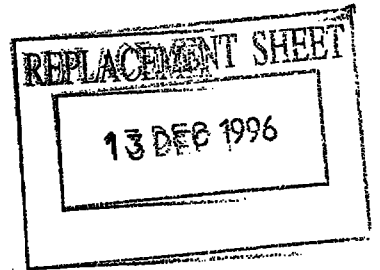

This Sheet Has Been Replaced






Table 1 (Test Results Cont'd)

API-SG		Formulated Engine Oils				
Engine Oil Tested	Commercial Product	No. 1	No. 2	No. 3	No. 4	No. 5
<u>CAT 1H₂ (Pass limit)</u>						
240 hours TGF	2	2	---	---	---	9
WTD	81	91	---	---	---	51
480 hours TGF (≤ 45)	8	3	---	---	---	16
WTD (≤ 140)	151	182	---	---	---	140



This Sheet Has Been Replaced

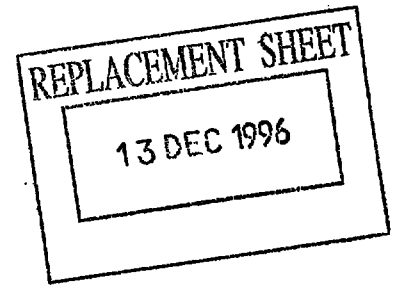




As can be seen from Table 1 seven formulated engine oils were tested i.e., one a commercial engine oil meeting API-SG requirements but having a phosphorous content of 0.1 wt. % due to 1.3 wt. % zinc dialkyldithiophosphate and six test formulations in which the zinc dialkyldithiophosphate content was reduced to 0.7 wt. % thus reducing the phosphorous content to 0.056 wt. %. Formulation Nos. 4 and 5 represent compositions according to the present invention. Formulation Nos. 1-3 represent comparative formulations which do not contain a compound of formula (I). Formulation No. 6 represents a formulation containing the same thiocarbamate as Formulation Nos. 4 and 5, but in a substantially reduced amount. The only formulations which passed all of the tests of the SEQ VE were the commercial lubricating oil having a phosphorous content of 0.1 wt. % and Formulation Nos. 4 and 5 of the present invention. Formulation No. 3 was identical to Formulation No. 4 with the exception that Formulation No. 4 contained 1 wt. % of the thiocarbamate in accordance with the present invention, whereas Formulation No. 3 had higher levels of an oxidation inhibitor and an extreme pressure agent (1 wt. % versus 0.3 wt. % for Formulation No. 4), yet Formulation No. 3 failed four of the six tests. Formulation No. 5 was identical to Comparative Formulation Nos. 1 and 2 with the exception that Formulation No. 5 contained 0.7 wt. % of the thiocarbamate, in accordance with the present invention, whereas Formulation Nos. 1 and 2 contained higher levels of the oxidation inhibitor and Formulation No. 2 also contained more ashless dispersant. Again, Formulation Nos. 1 and 2 failed four of the six tests whereas Formulation No. 5 passed each test. Formulation No. 6 did not contain sufficient thiocarbamate to provide the desired wear and corrosion protection because of the very low amount of zinc

This Sheet Has Been Replaced






dialkyldithiophosphate (i.e., measured as phosphorus 0.056 wt. %).

Based on the test data set forth in Table 1, engine oil No. 4 and No. 5 of the present invention satisfy the SEQ VE requirements of API-SG (top grade for commercially available engine oils), even though the phosphorous contents of these engine oils are extremely low i.e., 0.056 wt. %. In contrast, the engine oils No. 1, No. 2 and No. 3 containing no thiocarbamate compound could not pass the pass limits set for the API-SG classification. Particularly, the latter engine oils showed apparently poorer performances in cam wear and prevention of sludge, as compared with the commercially available API-SG engine oil and the engine oil according to the present invention. The engine oils of the invention showed excellent performances in the anti-wear and oxidation inhibition characteristics even at a phosphorous content reduced to about half of the generally adopted content. The observed performances were almost the same as those of a representative commercially available top-grade engine oil.

Example 2

In this example a higher phosphorous level engine oil, according to the invention, but containing only 0.2 wt. % of the same thiocarbamate used in Example 1, was tested using the SEQ VE test described in Example 1. A comparison formulation was also tested. The two formulations were both 0.09 wt. % phosphorous, provided by zinc dialkyldithiophosphate, SAE 5W30 oils and were identical except that Formulation 7 contained 0.2 wt. % thiocarbamate and 0.3 wt. % oxidation inhibitor whereas Formulation 8 contained no thiocarbamate and 0.8 wt. % oxidation





inhibitor. The engine oil formulations and the results of the testing are set forth in Table 2.

Details of the additives used are described below. The base oil was a paraffinic mineral oil having a viscosity index value of 100. The engine oil's viscosity grade was SAE 5W30. Supplemental additives such as anti-foaming agents were added.

Additives:

Metallic detergent - Mixture of overbased calcium phenate, overbased calcium sulfonate and neutral calcium sulfonate.

Ashless dispersant - Boric acid-modified succinimide but different from one in Example 1.

Thiocarbamate - Same as in Example 1.

ZnDTP - Zinc dialkyldithiophosphate of secondary alkyl type (alkyl carbon atom number: 4 to 6).

Oxidation inhibitor - Mixture of dialkyldiphenylamine and molybdenum inhibitor.

VI improver - Dispersant polymethacrylate type.

This Sheet Has Been Replaced
A standard 1D barcode with vertical black bars of varying widths on a white background.

REPLACEMENT SHEET

13 DEC 1996

Table 2 (Formulations)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
Viscosity Grade	-----SAE 5W30-----	
Phosphorous (wt. %)	-----0.09-----	
Additives (wt. %)		
Metallic Detergent	2.7	2.7
Ashless Dispersant	5.4	5.4
Thiocarbamate	0.2	---
ZnDTP	1.3	1.3
Oxidation Inhibitor	0.3	0.8
VI improver	5.6	5.6

This Sheet Has Been Replaced



REPLACEMENT SHEET
13 DEC 1996

Table 2 (Test Results)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
<u>SEO VE (Pass limit)</u>		
Sludge Average (≥ 9.0)	9.4	7.1
Rocker Cover (≥ 7.0)	9.1	6.7
Varnish Average (≥ 5.0)	6.2	5.8
Piston Skirt (≥ 6.5)	7.4	7.5
Cam Wear Average (≤ 5)	2	9
Maximum (≤ 15)	7	18


This Sheet Has Been Replaced



As can be seen from the results shown in Table 2, at the 0.09 wt. % phosphorous level 0.2 wt. % thiocarbamate was effective, in combination with the zinc dialkyldithiophosphate, to pass the SEQ VE requirements, whereas the identical composition containing the same amount of zinc dialkyldithiophosphate but without the thiocarbamate failed four of the six tests in the SEQ VE and particularly so with respect to cam wear.


Obviously, many modifications and variations of the invention described hereinabove or below can be made without departing from the essence and scope thereof.

This Sheet Has Been Replaced

WHAT IS CLAIMED IS:

1. A low phosphorous lubricating oil composition for internal combustion engines, which comprises a major amount of a base oil of lubricating viscosity, a wear inhibiting and corrosion inhibiting effective amount of a zinc dialkyldithiophosphate wear inhibitor and a thiocarbamate antiwear agent selected from the group of compounds having the formula:

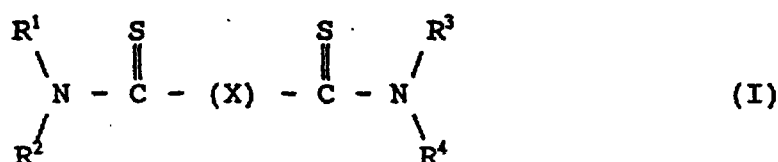

wherein each of R¹, R², R³ and R⁴ independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂CH₂S, S-CH₂CH₂CH₂-S, or S-CH₂-CH(CH₃)-S; and mixtures thereof,


and wherein the weight ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is in the range of about from 1:0.2 to 1:10 and wherein said composition has a phosphorous content of about from 0.03 to 0.09 wt. %, and wherein said phosphorous content is attributable to the phosphorous content of said zinc dialkyldithiophosphate.

2. The low phosphorous lubricating oil composition of Claim 1 wherein said composition comprises an ashless dispersant, a metal-containing detergent, and a viscosity index improver.
3. The low phosphorous lubricating oil composition of



This Sheet Has Been Replaced



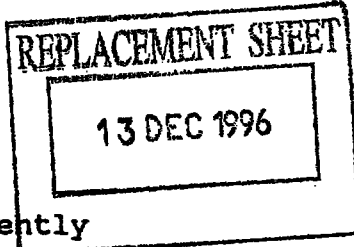



Claim 2 wherein R^1 , R^2 , R^3 and R^4 are independently selected from alkyl groups having 1 to 6 carbon atoms.

4. The low phosphorous oil composition of Claim 1 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate) and the zinc dialkyldithiophosphate is a secondary alkyl type.
5. The low phosphorous oil composition of Claim 3 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate) and the zinc dialkyldithiophosphate is a secondary alkyl type.
6. The low phosphorous oil composition of Claim 1 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate is in the range of 1:0.3 to 1:7.
7. The low phosphorous oil composition of Claim 5 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate is in the range of 1:0.3 to 1:7.
8. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.05 - 8 wt. % of said thiocarbamate antiwear agent.
9. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.1 - 4 wt. % of said thiocarbamate antiwear agent.
10. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.2 - 2 wt. % of said thiocarbamate antiwear agent.




This Sheet Has Been Replaced





11. An additive concentrate for use in internal combustion engine oils comprising a zinc dialkyldithiophosphate wear inhibitor and a thiocarbamate antiwear agent selected from the group of compounds having the formula:

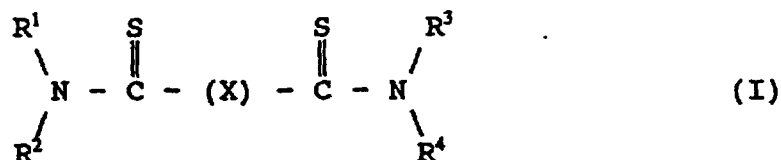

wherein each of R¹, R², R³ and R⁴ independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂-CH₂-S, S-CH₂-CH₂-CH₂-S, or S-CH₂-CH(CH₃)-S; and mixtures thereof,

and a minor amount of a compatible liquid diluent and wherein the weight ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is in the range of about from 1:0.2 to 1:10.


12. The concentrate of Claim 11 wherein said concentrate comprises a metal-containing detergent and an ashless dispersant.
13. The concentrate of Claim 11 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate).
14. The concentrate of Claim 11 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.




This Sheet Has Been Replaced

15. The concentrate of claim 12, wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.

16. The use of a thiocarbamate of the formula:

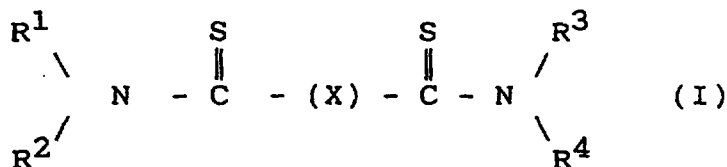


wherein each of R^1 , R^2 , R^3 and R^4 independently represents an alkyl group of from 1 to 18 carbon atoms and (X) represents, S, S-S, S-CH₂-S, S-CH₂CH₂-S, S-CH₂CH₂CH₂-S or S-CH₂-CH(CH₃)-S as an antiwear additive in a lubricant composition comprising a major portion of a lubricating oil.

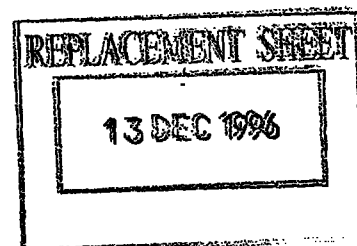

This Sheet Has Been Replaced



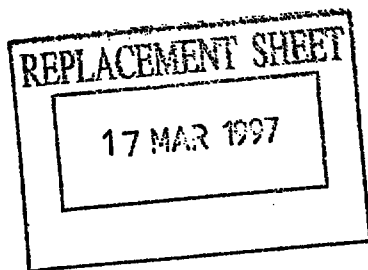

REPLACEMENT SHEETS		SC
☒	Description : paged 1... to paged 24.	
☒	Claim(s) : paged 27. to paged 30.	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged 31. to paged 32.	
DATE OF RECEIPT		17/3/97

-1-

LOW PHOSPHOROUS ENGINE OIL COMPOSITION AND ADDITIVE COMPOSITIONS


BACKGROUND OF THE INVENTION

This invention relates to improved lubricating oils, especially internal combustion engine lubricating oils, and additives and additives mixtures employable for the preparation of such lubricating oils.

Automobile spark ignition and diesel engines have valve train systems, including valves, cams and rocker arms which present special lubrication concerns. It is extremely important that the lubricant, i.e. the engine oil, protects these parts from wear. Further, it is important for engine oils to suppress the production of deposits in the engines. Such deposits are produced from non-combustibles and incomplete combustibles of hydrocarbon fuels (e.g., gasoline, diesel fuel oil) and by the deterioration of the engine oil employed.

Engine oils use a mineral oil or a synthetic oil as a base oil. However, simple base oils alone do not provide the necessary properties to provide the necessary wear protection, deposit control, etc. required to protect internal combustion engines. Thus, base oils are formulated with various additives, for imparting auxiliary functions, such as ashless dispersants, metallic detergents (i.e., metal-containing detergents), antiwear agents, antioxidants (i.e., oxidation inhibitors), viscosity index improvers and the like to give a compounded oil (i.e., a lubricating oil composition).


A number of such engine oil additives are known and employed in practice. Zinc dialkyldithiophosphates are, for example, because of their favorable characteristics as an antiwear agent and performance as an oxidation inhibitor, contained

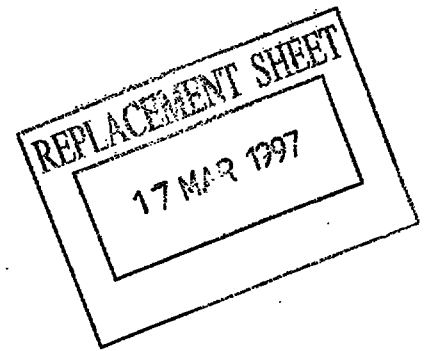

in most all of the commercially available internal composition engine oils, especially those used for automobiles.

However, a problem has arisen with respect to the use of zinc dialkyldithiophosphate, because phosphorous derivatives poison catalyst components of catalytic converters. This is a major concern, because effective catalytic converters are needed to reduce pollution and to meet governmental regulation designed to reduce toxic gases, such as hydrocarbons, carbon monoxide, and nitrogen oxides, in internal combustion engine exhaust emission. Such catalytic converters generally use a combination of catalytic metals, such as platinum or variations, and metal oxides and are installed in the exhaust streams, e.g., the exhaust pipes of automobiles, to convert the toxic gases to nontoxic gases. As before mentioned these catalyst components are poisoned by the phosphorous component, or the phosphorous decomposition products of the zinc dialkyldithiophosphate; and accordingly, the use of engine oils containing phosphorous additives may substantially reduce the life and effectiveness of catalytic converters. Therefore, it would be desirable to reduce the phosphorous content in the engine oils so as to maintain the activity and extend the life of the catalytic converter.


There is also governmental and automotive industry pressure towards reducing phosphorous content; for example, United States Military Standards MIL-L-46152E and the ILSAC Standards defined by the Japanese and United States Automobile Industry Association require engine oils to have phosphorous content below 0.12 wt. %. The phosphorous content in most high grade engine oils containing zinc dialkyldithiophosphate is approximately 0.1 wt. %, and thus

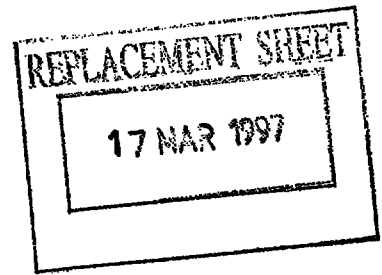

-3-

meet the 0.12 wt% requirement. Nevertheless, it would be desirable to decrease the amount of zinc dialkyldithiophosphate in lubricating oils still further, thus reducing catalyst deactivation and hence increasing the life and effectiveness of catalytic converters. However, simply decreasing the amount of zinc dialkyldithiophosphate presents problems because this necessarily lowers the antiwear properties and oxidation inhibition properties of the lubricating oil. Therefore, it is necessary to find a way to reduce phosphorous content while still retaining the antiwear and oxidation or corrosion inhibiting properties of the higher phosphorous content engine oils.

In order to compensate for lowering the amount of zinc dialkyldithiophosphate, the use of other oxidation inhibitors such as phenol derivatives and amine derivatives have been studied. However, the use of such known oxidation inhibitors in place of zinc dialkyldithiophosphate at best only marginally satisfies the required levels of antiwear and oxidation inhibition. The use of magnesium sulfonate detergents which are also effective to enhance the antiwear properties in valve train systems has also been studied and, in fact, some commercially available engine oils use a magnesium sulfonate detergent. However, engine oils containing a magnesium sulfonate detergent have drawbacks in that crystalline precipitates are sometimes produced when these engine oils are stored under humid or variable temperature conditions for a long period of time. Such precipitates may cause plugging of the filter which is installed in the engine oil circulating system. Such plugging is more likely to occur when a large amount of the magnesium sulfonate detergent is used so as to enhance the desired antiwear properties. Thus, the use of magnesium sulfonate detergents is not a satisfactory solution.

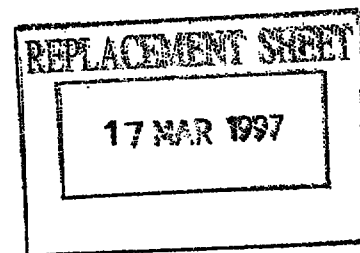


-4-

At the present time, demand for further decrease of phosphorous content is very high from the viewpoint of the aforementioned problems. For instance, it is sometimes desired to decrease the phosphorous content to levels below the regulated upper limit and the 0.1 wt. % phosphorous level of today's better engine oil. This reduction cannot be satisfied by the present measures in practice and still meet the severe antiwear and corrosion inhibiting properties required of today's engine oils.

Thus, it would be desirable to develop lubricating oils, and additives and additive packages therefore, having low levels of phosphorous but which still provide the needed wear protection and corrosion protection now provided by lubricating oils having higher levels of zinc dialkyldithiophosphate, but which do not suffer from the disadvantages of the low phosphorous level lubricants discussed above.

U.S. Patent No. 3,876,550 (issued 1975) discloses lubricating compositions containing an alkylene bis(dithiocarbamate), as an antioxidant, and a substituted succinic acid as a rust inhibitor. The alkylene dithiocarbamate is represented in the patent by the formula $R^1R^2N-C(S)-S-alkylene-S-C(S)-NR^3R^4$. Example 5 of the patent describes a crankcase lubricant containing a VI improver, an ashless dispersant and methylene bis(dibutyldithiocarbamate). The patent further teaches that the composition may also contain various other additives, for example, detergents, dispersants, VI improvers, extreme pressure agents, antiwear additives, etc., as well as other oxidation inhibitors and corrosion inhibitors (Col. 7, lines 35-55) and cites an extensive list of extreme pressure agents, corrosion

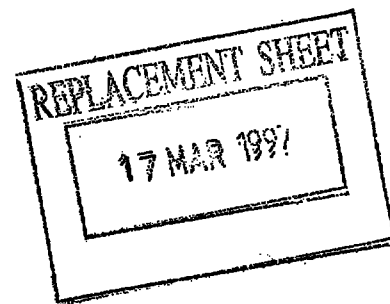


inhibitors and antioxidants, including zinc salts of phosphorodithioic acid (Col. 8, lines 1-22).

The use of methylene bis(dibutyldithiocarbamate) as an oxidation inhibitor in lubricating oils, in combination with other ingredients, is also disclosed in U.S. Patent Nos. 4,125,479 (1978) and 4,880,551 (1989).


U.S. Patent No. 4,879,054 (1989) is directed to cold temperature greases and teaches using dithiocarbamates such as Vanlube 7723, i.e., 4,4'-methylene bis(dithiocarbamate), in such greases to provide extreme pressure antiwear properties (Col. 6, lines 18-28). Examples 13-18 (Col. 14, lines 26-32) describe using Vanlube 7723 and triarylphosphate as replacements for lead naphthenate and zinc dithiophosphate. The use of dithiocarbamates as extreme pressure antiwear additives is also taught by U.S. Patent No. 4,859,352, and U.S. Patent No. 4,648,985 teaches that the combination of dithiocarbamates with zinc dithiophosphate and copper salts of carboxylic acid provide lubricants with extreme pressure properties.

SUMMARY OF THE INVENTION

The present invention provides lubricating oil compositions which provide high antiwear protection and oxidation-corrosion protection, but which have only low levels of phosphorous, less than 0.1 wt. % and preferably not more than 0.08 wt %. Thus, the present lubricating compositions are much more environmentally desirable than the higher phosphorous lubricating compositions generally used in internal combustion engines because they facilitate longer catalytic converter life and activity and yet provide the desired high wear protection and corrosion inhibition.

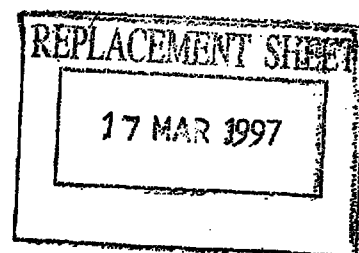

The present lubricating composition comprises a base oil of lubricating viscosity and a wear inhibiting, corrosion inhibiting effective amount of a thiocarbamate compound, or mixture of compounds, having the formula:

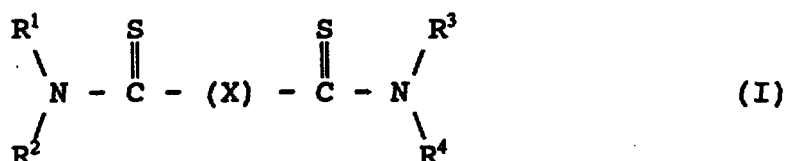


wherein each of R¹, R², R³ and R⁴, independent of each other, represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂CH₂-S, S-CH₂CH₂CH₂-S, or S-CH₂CH(CH₃)-S,

and an amount of zinc dialkyldithiophosphate which provides a phosphorous content, based on the total weight of the lubricating composition, less than 0.1 and preferably not exceeding 0.08 wt. %, and more preferably not exceeding 0.06 wt. %.

In another aspect the invention provides an additive package composition or concentrate comprising one or more compounds of formula (I) in an organic diluent liquid, for example, base oil and preferably containing various other additives desired in lubricating oil compositions such as, for example, metal-containing detergents and ashless dispersants.


FURTHER DESCRIPTION OF THE INVENTION AND EMBODIMENTS

It has been found that the incorporation of the compound of formula (I) or mixtures thereof into synthetic or mineral base oils provides lubricating oils which provide excellent

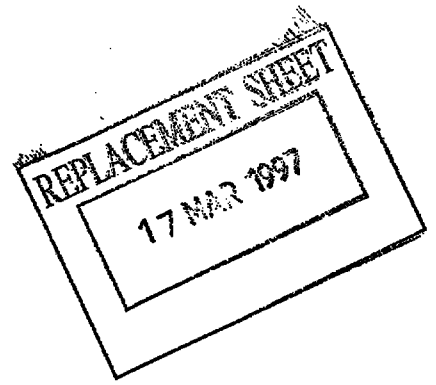


-7-

wear protection and corrosion inhibition in internal combustion engines, especially if incorporated with low levels of zinc dialkyldithiophosphates. The compounds of formula (I) (hereafter referred to as thiocarbamates) i.e.

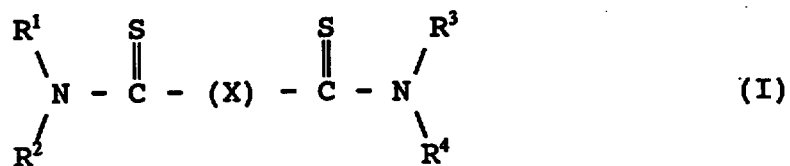

wherein R^1 , R^2 , R^3 and R^4 and (X) are as defined herein-above,

are known compounds and can be prepared by known procedures, and in some cases have been employed as vulcanizing accelerators and as additives for gear oils and turbine oils and hence readily commercially available. Referring to the R^1 , R^2 , R^3 and R^4 groups, the alkyl group may be linear (straight chain) or branched chain and preferably have 1 through 10 carbon atoms, more preferably 1 through 6 carbon atoms. Typical alkyl groups include, for example, methyl, ethyl, propyl, n-butyl, isobutyl, pentyl, isopentyl, heptyl, octyl, 2-ethylhexyl, nonyl, decyl, and dodecyl. Typical examples of the thiocarbamate compounds of the formula (I) are methylene bis(dibutyldithiocarbamate), bis(dimethylthiocarbamoyl)monosulfide, bis(dimethylthiocarbamoyl)disulfide, bis(dibutylthiocarbamoyl)disulfide, bis(diamylthiocarbamoyl)disulfide, and bis(dioctylthiocarbamoyl)disulfide. These compounds can be used singly or in combination of two or more compounds in combination with low levels of zinc dialkyldithiophosphates and afford good wear and corrosion protection and also have good oil solubility. The thiocarbamate compound is

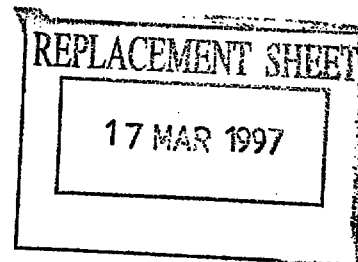

-8-

generally incorporated into base oils to give a compounded engine oil containing 0.05-8 wt. %, preferably 0.1-4 wt. % more preferably 0.5 - 2 wt. % of the thiocarbamate compound. In general, by increasing the amount of zinc dialkyldithiophosphate, lower amounts of thiocarbamate, within the above described ranges, can be use.


We have found that excellent results are obtained in terms of both engine protection and environmental low phosphorous consideration by using the thiocarbamate in combination with very low levels of zinc dialkyldithiophosphate. It is advantageous to use the thiocarbamate and zinc dialkyldithiophosphate in combination at appropriate ratios such that the phosphorous content of the compounded engine oil is less than 0.1 wt. %, preferably no higher than 0.08 wt. %, and more preferably not higher than 0.06 wt. %, and yet provides the desired levels of antiwear properties and oxidation inhibition. On the other hand, in order to ensure the high wear protection and corrosion inhibition required by both today's and future engines, we have found that the amount of zinc dialkyldithiophosphate expressed in terms of phosphorous content should provide a phosphorous content of about from 0.03 to 0.09 wt. %, preferably 0.04 to 0.08 wt. % based on the total weight of the lubricating oil composition. We have discovered that the weight ratio of the thiocarbamate compound to the zinc dialkyldithiophosphate should preferably be in the range of 1:01 to 1:20 and more preferably in the range of from 1:0.2 to 1:10. Best results, in terms of the aforementioned considerations, are obtained when the lubricating composition has a phosphorous content, furnished by the zinc dialkyldithiophosphate, of from 0.05 to 0.07 wt. % and the weight ratio of the thiocarbamate compound of formula (I) to the zinc dialkyldithiophosphate is in the range of about

17 MAR 1997

-9-


from 1:0.2 to 1:10. (It should perhaps be noted that because of the phosphorus catalyst poisoning problem, that with the exception of zinc dialkyldithiophosphate, that phosphorus containing compounds are avoided in such engine oils, particularly those intended for use in automotive engines. Thus, in the case of the present invention, phosphorus content is calculated based on the zinc dialkyldithiophosphate and its molecular phosphorus content, and directly equates to zinc dialkyldithiophosphate content.)

Zinc dialkyldithiophosphates are, of course, known wear inhibiting agents and can be obtained from commercial sources or, if desired, prepared by known procedures. As is well known, zinc dialkyldithiophosphates refer to a class of compounds generally having the formula

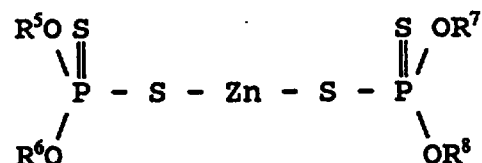

wherein R⁵, R⁶, R⁷ and R⁸ are independently alkyl or alkylphenyl.

Typically the alkyl group has about from 1 to 20 carbon atoms, preferably 3 to 10 carbon atoms, and can be straight chained or branched. In the present invention we have found that very good results are obtained using zinc dialkyldithiophosphates wherein the R groups are branched alkyl having about 3 to 6 carbon atoms. A variety of zinc dialkyldithiophosphates are, for example, described in an article by M. Born et al. entitled "Relationship between Chemical Structure and Effectiveness of Some Metallic

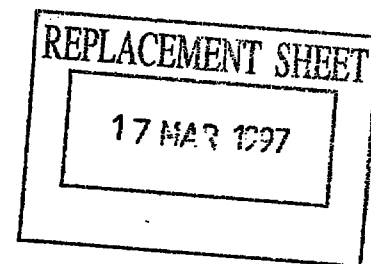


-10-

Dialkyl- and Diaryl-dithiophosphates in different Lubricated Mechanisms", appearing in Lubrication Science 4-2 January 1992, see for example pages 97-100.

The base oil may be a mineral oil or synthetic oil or a blend of mineral oils and/or synthetic oils blended to give a base oil of the desired internal combustion engine oil viscosity. Typically, individually the oils used as its base oil will have a viscosity range of about from 10 to 120 cST at 40°C and will be selected or blended depending on the desired end use and the additives in the finished oil to give the desired grade of engine oil.

Preferably, as well as the thiocarbamate compound and zinc dialkyldithiophosphate and base oil, the lubricating oil composition will also contain various additives for imparting auxiliary functions, for example, metal-containing detergents, ashless dispersants, viscosity index improvers and the like, to give a finished lubricating oil in which these additives are dissolved or dispersed. A variety of metal-containing detergents, ashless dispersants, and viscosity index improvers are known and commercially available. These additives, or their analogous compounds, can be employed for the preparation of the engine oils of the invention by the usual blending procedures.

As the metal-containing detergent, a metal phenate or a metal sulfonate is generally employed. Preferably, the metal phenate is an alkaline earth metal salt of sulfide of alkylphenol having an alkyl group of approximately 8-30 carbon atoms. Generally employed alkaline earth metals are calcium, magnesium and barium. Preferably the metal sulfonate is an alkaline earth metal salt of a sulfonated aromatic compound or a sulfonated mineral oil having a

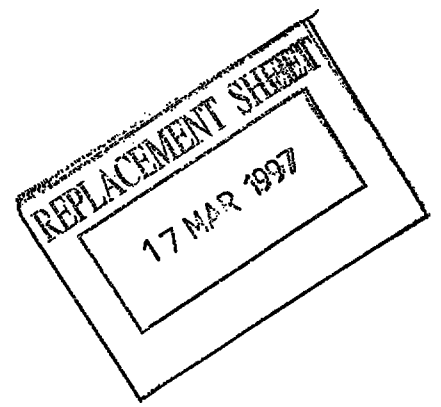


-11-

molecular weight of approximately 400-600. Generally employed alkaline earth metals are also calcium, magnesium and barium. The metal phenate and metal sulfonate can be used singly or in combination. Also employed are other metal-containing detergents such as salicylates, phosphorates and naphthenates of alkaline earth metals. These detergents can be employed singly or in combination. The aforementioned phenate and sulfonate can be employed in combination with these other metal-containing detergents. The metal-containing detergents can be of a neutral type or of an over-based better type having an alkalinity value of 150 to 300 or more. The metal-containing detergent is generally incorporated into an engine oil in an amount of 0.5-20 wt. % based on total weight of the engine oil (i.e., compounded oil). Although magnesium salts of phenate and sulfonate may, in some cases, enhance antiwear properties, they, as noted above, have a storage stability problem. In consideration of this problem, it is generally preferred to use calcium salts (e.g., phenates, sulfonates, etc.) in combination with the thiocarbamate compounds used in the present invention.

Examples of the ashless dispersants which may be used in the present engine oil are alkyl or alkenyl substituted succinimides, succinic esters and benzylamines, in which the alkyl or alkenyl group has a molecular weight of approximately 700-3,000. The derivatives of these dispersants, e.g., borated dispersants, may also be used. The ashless dispersant is generally incorporated into an engine oil in an amount of 0.5-15 wt. % per total amount of the engine oil.

Examples of the viscosity index improvers are poly-(alkyl methacrylate), ethylene-propylene copolymer, polyisoprene,

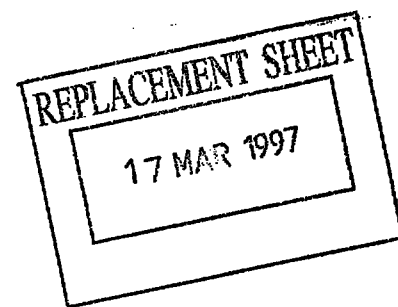


-12-

and styrene-butadiene copolymer. Viscosity index improvers of dispersant type (having increased dispersancy) or multifunctional type are also employed. These viscosity index improvers can be used singly or in combination. The amount of viscosity index improver to be incorporated into the engine oil varies with viscosity requirements of the engine oil, but generally in the range of about 0.5 to 20% by weight of the total weight of the engine oil lubricating composition.

As well as the above additives, the lubricating oil composition may contain various other additives such as, for example, extreme pressure agents, corrosion inhibitors, rust inhibitors, friction modifiers, anti-foaming agents, and pour point depressants. Other oxidation inhibitors such as hindered phenols and other antiwear agents can be used in combination with the thiocarbamate compound of formula (I).

In another embodiment of the invention, the thiocarbamate of formula (I) and zinc dialkyldithiophosphate may be provided as an additive package or concentrate which will be incorporated into a base oil at a different site or time. The package will contain the two aforementioned components in the weight ratio previously specified for incorporation into the base oil and generally will also contain a compatible diluent or carrier liquid, e.g., base oil. Typically a neutral oil having a viscosity of about 4-8.5 cST at 100°C preferably 4-6 cST at 100°C will be used as the diluent, though synthetic oils, as well as other organic liquids which are compatible with the additives and finished lubricating oil can also be used. The additive package will also typically contain one or more of the various other additives, referred to above, in the desired

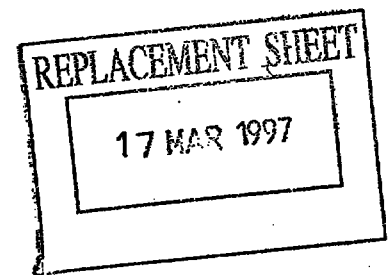

-13-


amounts and ratios to facilitate direct combination with the requisite amount of base oil.

Preferably, the additive concentrate comprises a metal-containing detergent, an ashless dispersant and an alkylthiocarbamate compound of the formula (I), zinc dialkyldithiophosphate and optional components dissolved or dispersed in an organic liquid diluent, at a high concentration. The additive concentrate is preferably prepared by mixing 100 weight parts of a metal-containing detergent, 10-700 weight parts of an ashless dispersant, and 2-200 weight parts of the thiocarbamate compound of the formula (I) plus a proportional amount of zinc dialkyldithiophosphate. In some cases it may be desirable to omit the viscosity index improver, depending on the particular type, because of compatibility problems which may occur at the high additive concentration used in the additive package.

A further understanding of the invention can be had from the following non-limiting examples.

EXAMPLES

At present, the performances of engine oils are evaluated by various bench scale tests and engine tests. Typical standard engine tests are conducted according to requirements of API service classifications. The maximum class for engine oils of motor cars for service stations is named API-SG. In order to pass the requirements defined in API-SG, evaluations using engines fixed on beds, which are named SEQ (sequence) IID, SEQ IIIE, SEQ VE, CAT 1H₂ and CRC L-38 are generally conducted. In some instances a CAT 1H₂

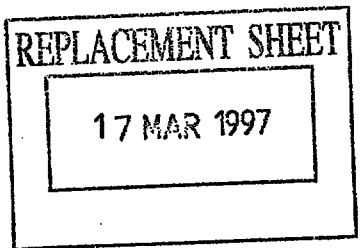

-14-

(fixed bed test for evaluating diesel oils) is also conducted.

The commercially available engine oils classified into API-SG oil contain zinc dialkyldithiophosphate in an amount corresponding to the phosphorous content of approximately 0.1 wt. %. It has been observed that if the amount of zinc dialkyldithiophosphate is reduced so as to decrease the phosphorous content, the resulting engine oils show poor results in the evaluation of wear of valve train systems defined in the SEQ IIIE test and the SEQ VE test, and also give poor results in the observation of viscosity increase defined in the SEQ IIIE test. This means that such engine oil fails to pass the level defined for the API-SG class.

Example 1

The most severe of the above mentioned tests is the SEQ VE test and, accordingly, all of the formulated oils in this example were tested using the SEQ VE test. In addition, the commercial standard, comparative Formula No. 1 and Formulation 5 of the present invention were also tested by the SEQ IIIE test and CAT 1H₂ test.

The SEQ IIIE test is performed in a 3.6 liter, V-6 engine of General Motors which is operated at 149°C (oil temperature) for 64 hours using lead-containing gasoline. This test is conducted for examining oxidation stability of engine oils at an elevated temperature and property of preventing wear of valve train systems. This test measures viscosity increase (%), oil ring land deposit, piston skirt varnish, average sludge, cam plus lifter wear (average) and cam plus lifter wear (maximum).

17 MAR 1997


-15-

The CAT 1H₂ test is performed in 2.2 liter monocylinder diesel engine of Caterpillar Inc. which is operated for 480 hours using gas oil containing 0.4% of sulfur. This test is conducted for examining detergency at an elevated temperature. This test measures TGF (top groove carbon fill), WTD (weighted total demerit), each for 240 hours operation and 480 hours operation.

The SEQ VE test is performed in a 2.3 liter engine of Ford Motor Co. (L-4, OHC) using lead-free gasoline, which is operated cyclicly for 288 hours. This test is made for examining detergency for engines such as a tendency to produce sludge in the operations at low and middle temperatures as well as examining wear of the valve train system. If the wear of the valve train system is high, a large amount of iron in the form of microparticles which are produced through the wear of the valve train system are dispersed in the engine oil employed so as to accelerate production of sludge. This test measures engine sludge, rocker cover sludge, engine varnish, piston skirt varnish, cam wear (average) and cam wear (maximum).

The engine oil formulations and the results of the testing are set forth in Table 1. Also presented in Table 1 are the pass limits for the respective engine tests in the form of grading points (in terms of merit) or measured value.

Details of the additives used are described below. The base oil was a paraffinic mineral oil having a viscosity index value (VI value) of 100. The engine oil was formulated to give viscosity conditions of SAE 10W30 defined in the API Service Classification. Supplemental additives such as anti-foaming agents were added if required.

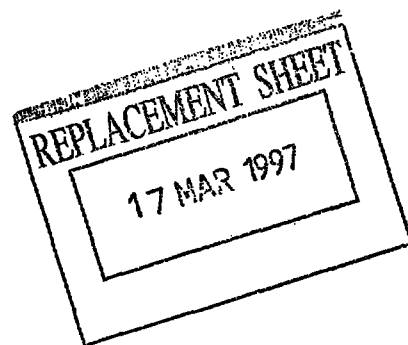

Additives:

Metallic detergent - Metal-containing detergent (mixture of overbased calcium sulfonate and neutral calcium sulfonate).

Ashless dispersant - Boric acid-modified succinimide (for the formulated engine oil No. 2 only, polyisobutenyl succinic ester of 1 wt. % was added).

Thiocarbamate - Methylene bis(dibutyldithiocarbamate) of the invention.

ZnDTP - Zinc dialkyldithiophosphate of secondary alkyl type (alkyl carbon atom number: 3 to 6).

Oxidation inhibitor - Organic oxidation inhibitor (mixture of hindered phenol and dialkyldiphenylamine).

EP agent - Extreme pressure agent of sulfur type (diparaffin sulfide).

VI improver - Viscosity index improver (dispersant type ethylene-propylene copolymer).

Pour point depressant - of polymethacrylate type.

REPLACEMENT SHEET

17 MAR 1997

Table 1 (Formulations)

Engine Oil Tested	API-SG Commercial Products	Formulated Engine Oils					
		No. 1	No. 2	No. 3	No. 4	No. 5	No. 6
Viscosity Grade		----- SAE 10W30 -----					
Phosphorous Content (wt. %)	0.1	----- 0.056 -----					
<u>Additives (wt. %)</u>							
Metallic detergent	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Ashless dispersant	5.8	5.8	6.8	5.8	5.8	5.8	5.8
Thiocarbamate	---	---	---	---	1.0	0.7	0.3
ZnDTP	1.3	0.7	0.7	0.7	0.7	0.7	0.7
Oxidation inhibitor	1.0	1.3	1.3	1.6	1.3	0.7	0.7
EP agent	---	---	---	1.0	0.3	---	---
VI improver	6.3	6.3	6.3	6.3	6.3	6.3	6.3
Pour point depressant	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Table 1 (Test Results)

Engine Oil Tested	API-SG Commercial Product	Formulated Engine Oils					
		No. 1	No. 2	No. 3	No. 4	No. 5	No. 6
<u>SEO VE (Pass limit)</u>							
Sludge Average (≥ 9.0)	9.4	6.9	6.8	7.2	9.0	9.2	7.4
Rocker Cover (≥ 7.0)	8.9	5.6	5.5	4.4	8.0	8.1	6.6
Varnish Average (≥ 5.0)	6.4	6.3	5.5	7.5	6.8	6.6	6.5
Piston Skirt (≥ 6.5)	7.1	7.4	7.3	7.2	6.8	7.5	6.5
Cam Wear Average (≤ 5)	1	14	16	11	5	=	10
Maximum (≤ 15)	1	20	20	16	11	1	14


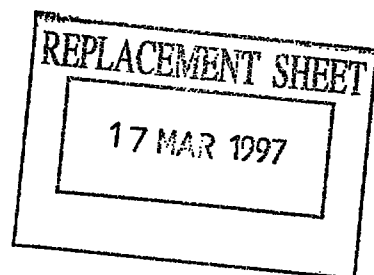



Table 1 (Test Results Cont'd)

Engine Oil Tested	API-SG Commercial Products				
	No. 1	No. 2	No. 3	No. 4	No. 5
<u>SEQ IIIE (Pass limit)</u>					
Viscosity Increase (≤ 375)	330	542	---	---	223
Land Deposit (≥ 3.5)	4.4	6.0	---	---	6.8
Varnish (≥ 8.9)	9.0	9.0	---	---	9.0
Average Sludge (≥ 9.2)	9.5	9.4	---	---	9.5
Cam Lifter Wear Average (≤ 30)	13	21	---	---	7
Maximum (≤ 64)	16	27	---	---	17

Table 1 (Test Results Cont'd)


Engine Oil Tested	API-SG Commercial Product	Formulated Engine Oils				
		No. 1	No. 2	No. 3	No. 4	No. 5
<u>CAT 1H₂ (Pass limit)</u>						
240 hours						
TGF	2	2	---	---	---	9
WTD	81	91	---	---	---	51
480 hours						
TGF (≤ 45)	8	3	---	---	---	16
WTD (≤ 140)	151	182	---	---	---	140



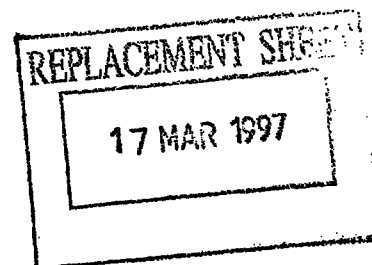

-21-

As can be seen from Table 1 seven formulated engine oils were tested i.e., one a commercial engine oil meeting API-SG requirements but having a phosphorous content of 0.1 wt. % due to 1.3 wt. % zinc dialkyldithiophosphate and six test formulations in which the zinc dialkyldithiophosphate content was reduced to 0.7 wt. % thus reducing the phosphorous content to 0.056 wt. %. Formulation Nos. 4 and 5 represent compositions according to the present invention. Formulation Nos. 1-3 represent comparative formulations which do not contain a compound of formula (I). Formulation No. 6 represents a formulation containing the same thiocarbamate as Formulation Nos. 4 and 5, but in a substantially reduced amount. The only formulations which passed all of the tests of the SEQ VE were the commercial lubricating oil having a phosphorous content of 0.1 wt. % and Formulation Nos. 4 and 5 of the present invention. Formulation No. 3 was identical to Formulation No. 4 with the exception that Formulation No. 4 contained 1 wt. % of the thiocarbamate in accordance with the present invention, whereas Formulation No. 3 had higher levels of an oxidation inhibitor and an extreme pressure agent (1 wt. % versus 0.3 wt. % for Formulation No. 4), yet Formulation No. 3 failed four of the six tests. Formulation No. 5 was identical to Comparative Formulation Nos. 1 and 2 with the exception that Formulation No. 5 contained 0.7 wt. % of the thiocarbamate, in accordance with the present invention, whereas Formulation Nos. 1 and 2 contained higher levels of the oxidation inhibitor and Formulation No. 2 also contained more ashless dispersant. Again, Formulation Nos. 1 and 2 failed four of the six tests whereas Formulation No. 5 passed each test. Formulation No. 6 did not contain sufficient thiocarbamate to provide the desired wear and corrosion protection because of the very low amount of zinc

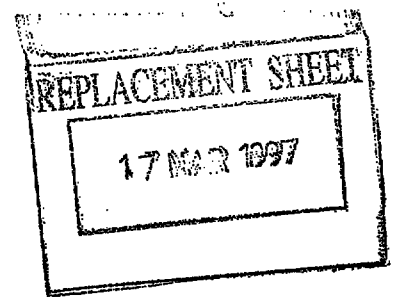


-22-

dialkyldithiophosphate (i.e., measured as phosphorus 0.056 wt. %).

Based on the test data set forth in Table 1, engine oil No. 4 and No. 5 of the present invention satisfy the SEQ VE requirements of API-SG (top grade for commercially available engine oils), even though the phosphorous contents of these engine oils are extremely low i.e., 0.056 wt. %. In contrast, the engine oils No. 1, No. 2 and No. 3 containing no thiocarbamate compound could not pass the pass limits set for the API-SG classification. Particularly, the latter engine oils showed apparently poorer performances in cam wear and prevention of sludge, as compared with the commercially available API-SG engine oil and the engine oil according to the present invention. The engine oils of the invention showed excellent performances in the anti-wear and oxidation inhibition characteristics even at a phosphorous content reduced to about half of the generally adopted content. The observed performances were almost the same as those of a representative commercially available top-grade engine oil.

Example 2

In this example a higher phosphorous level engine oil, according to the invention, but containing only 0.2 wt. % of the same thiocarbamate used in Example 1, was tested using the SEQ VE test described in Example 1. A comparison formulation was also tested. The two formulations were both 0.09 wt. % phosphorous, provided by zinc dialkyldithiophosphate, SAE 5W30 oils and were identical except that Formulation 7 contained 0.2 wt. % thiocarbamate and 0.3 wt. % oxidation inhibitor whereas Formulation 8 contained no thiocarbamate and 0.8 wt. % oxidation

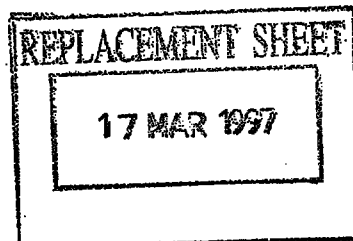

-23-

inhibitor. The engine oil formulations and the results of the testing are set forth in Table 2.

Details of the additives used are described below. The base oil was a paraffinic mineral oil having a viscosity index value of 100. The engine oil's viscosity grade was SAE 5W30. Supplemental additives such as anti-foaming agents were added.

Additives:

Metallic detergent - Mixture of overbased calcium phenate, overbased calcium sulfonate and neutral calcium sulfonate.

Ashless dispersant - Boric acid-modified succinimide but different from one in Example 1.

Thiocarbamate - Same as in Example 1.

ZnDTP - Zinc dialkyldithiophosphate of secondary alkyl type (alkyl carbon atom number: 4 to 6).

Oxidation inhibitor - Mixture of dialkyldiphenylamine and molybdenum inhibitor.

VI improver - Dispersant polymethacrylate type.

Table 2 (Formulations)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
Viscosity Grade	-----SAE 5W30-----	
Phosphorous (wt. %)	-----0.09-----	
Additives (wt. %)		
Metallic Detergent	2.7	2.7
Ashless Dispersant	5.4	5.4
Thiocarbamate	0.2	---
ZnDTP	1.3	1.3
Oxidation Inhibitor	0.3	0.8
VI improver	5.6	5.6

REPLACEMENT SHEET
17 MAR 1997

THIS SHEET HAS BEEN
REPLACED


REPLACEMENT SHEET
17 MAR 1997

This Sheet Has Been Replaced



Table 2 (Test Results)


Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
SEO VE (Pass limit)		
Sludge Average (≥ 9.0)	9.4	7.1
Rocker Cover (≥ 7.0)	9.1	6.7
Varnish Average (≥ 5.0)	6.2	5.8
Piston Skirt (≥ 6.5)	7.4	7.5
Cam Wear Average (≤ 5)	2	9
Maximum (≤ 15)	7	18



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




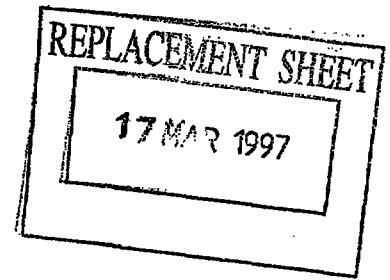

-26-


As can be seen from the results shown in Table 2, at the 0.09 wt. % phosphorous level 0.2 wt. % thiocarbamate was effective, in combination with the zinc dialkyldithiophosphate, to pass the SEQ VE requirements, whereas the identical composition containing the same amount of zinc dialkyldithiophosphate but without the thiocarbamate failed four of the six tests in the SEQ VE and particularly so with respect to cam wear.

Obviously, many modifications and variations of the invention described hereinabove or below can be made without departing from the essence and scope thereof.

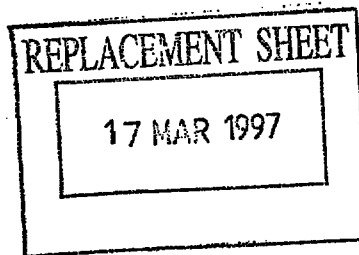

WHAT IS CLAIMED IS:

1. A low phosphorous lubricating oil composition for internal combustion engines, which comprises a major amount of a base oil of lubricating viscosity, a wear inhibiting and corrosion inhibiting effective amount of a zinc dialkyldithiophosphate wear inhibitor and a thiocarbamate antiwear agent selected from the group of compounds having the formula:

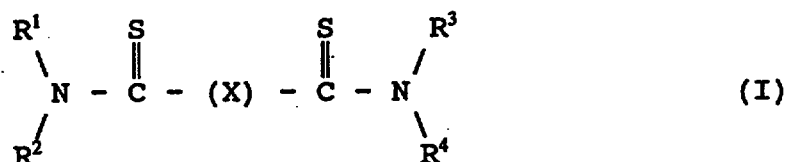


wherein each of R^1 , R^2 , R^3 and R^4 independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂CH₂S, S-CH₂CH₂CH₂-S, or S-CH₂-CH(CH₃)-S; and mixtures thereof,

and wherein the weight ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is in the range of about from 1:0.2 to 1:10 and wherein said composition has a phosphorous content of about from 0.03 to 0.09 wt. %, and wherein said phosphorous content is attributable to the phosphorous content of said zinc dialkyldithiophosphate.

2. The low phosphorous lubricating oil composition of Claim 1 wherein said composition comprises an ashless dispersant, a metal-containing detergent, and a viscosity index improver.
3. The low phosphorous lubricating oil composition of




-28-



Claim 2 wherein R^1 , R^2 , R^3 and R^4 are independently selected from alkyl groups having 1 to 6 carbon atoms.


4. The low phosphorous oil composition of Claim 1 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate) and the zinc dialkyldithiophosphate is a secondary alkyl type.
5. The low phosphorous oil composition of Claim 3 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate) and the zinc dialkyldithiophosphate is a secondary alkyl type.
6. The low phosphorous oil composition of Claim 1 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate is in the range of 1:0.3 to 1:7.
7. The low phosphorous oil composition of Claim 5 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate is in the range of 1:0.3 to 1:7.
8. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.05 - 8 wt. % of said thiocarbamate antiwear agent.
9. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.1 - 4 wt. % of said thiocarbamate antiwear agent.
10. The low phosphorous lubricating oil composition of Claim 1 wherein said composition contains 0.2 - 2 wt. % of said thiocarbamate antiwear agent.

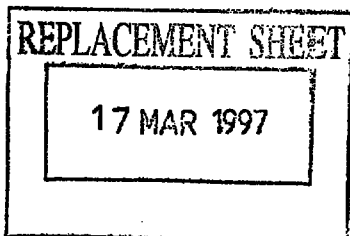

-29-



11. An additive concentrate for use in internal combustion engine oils comprising a zinc dialkyldithiophosphate wear inhibitor and a thiocarbamate antiwear agent selected from the group of compounds having the formula:

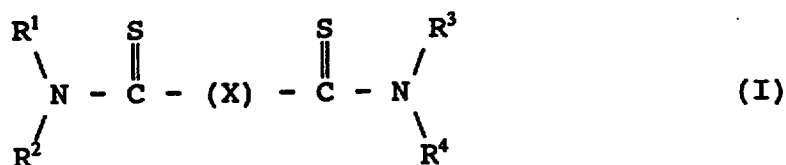


wherein each of R¹, R², R³ and R⁴ independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂-CH₂-S, S-CH₂-CH₂-CH₂-S, or S-CH₂-CH(CH₃)-S; and mixtures thereof,

and a minor amount of a compatible liquid diluent and wherein the weight ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is in the range of about from 1:0.2 to 1:10.

12. The concentrate of Claim 11 wherein said concentrate comprises a metal-containing detergent and an ashless dispersant.
13. The concentrate of Claim 11 wherein said thiocarbamate antiwear agent is methylene bis(dibutyldithiocarbamate).
14. The concentrate of Claim 11 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.




15. The concentrate of Claim 12 wherein the ratio of said thiocarbamate antiwear agent to said zinc dialkyldithiophosphate wear inhibitor is 1:0.3 to 1:7.

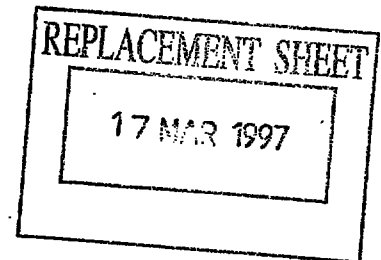

LOW PHOSPHOROUS ENGINE OIL COMPOSITION AND ADDITIVE
COMPOSITIONS


ABSTRACT OF THE DISCLOSURE

A low phosphorous lubricating oil composition for internal combustion engines comprising an alkylthiocarbamate compound of the formula:

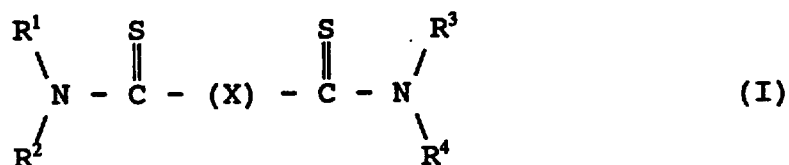

wherein each of R¹, R², R³, and R⁴ independently represents an alkyl group of 1-18 carbon atoms, and (X) represents S, S-S, S-CH₂-S, S-CH₂CH₂-S, S-CH₂CH₂CH₂-S, or S-CH₂CH(CH₃)-S,

and additive compositions and additive packages utilizing the above compound.

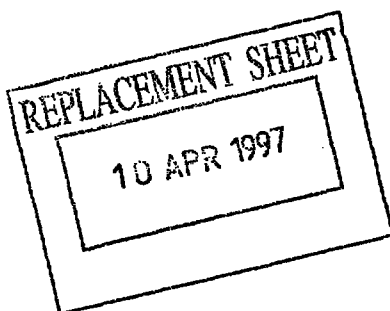

-24-

REPLACEMENT SHEETS		5G
☒	Description :	paged 24. to paged 25.
☐	D. Circle(s) :	paged to paged
☐	E. Drawing(s) :	paged to paged
☐	F. Abstract :	paged to paged
DATE OF RECEIPT		10/4/78

Table 2 (Formulations)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
Viscosity Grade	-----SAE 5W30-----	
Phosphorous (wt. %)	-----0.09-----	
Additives (wt. %)		
Metallic Detergent	2.7	2.7
Ashless Dispersant	5.4	5.4
Thiocarbamate	0.2	---
ZnDTP	1.3	1.3
Oxidation Inhibitor	0.3	0.8
VI improver	5.6	5.6

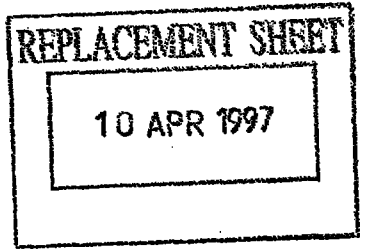


Table 2 (Test Results)

Engine Oil Tested	Formulated Engine Oils	
	No. 7	No. 8
<u>SEO VE (Pass limit)</u>		
Sludge Average (≥ 9.0)	9.4	7.1
Rocker Cover (≥ 7.0)	9.1	6.7
Varnish Average (≥ 5.0)	6.2	5.8
Piston Skirt (≥ 6.5)	7.4	7.5
Cam Wear Average (≤ 5)	2	9
Maximum (≤ 15)	7	18