



- (51) International Patent Classification:
H02G 15/06 (2006.01) *H02G 15/064* (2006.01)
- (21) International Application Number:
PCT/EP2011/002504
- (22) International Filing Date:
19 May 2011 (19.05.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): PRYS-
MIAN S.p.A. [IT/IT]; Viale Sarca 222, I-20126 Milano
(IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): QUAGGIA, Dario
[IT/IT]; c/o Prysmian Cavi e Sistemi Energia S.r.l., Viale
Sarca 222, I-20126 Milano (IT).
- (74) Agents: BOTTERO, Claudio et al.; PORTA,
CHECCACCI & ASSOCIATI S.p.A., Via Trebbia 20, I-
20135 Milano (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TERMINATION FOR ELECTRICAL CABLES AND METHOD FOR MANUFACTURING SUCH A TERMINATION

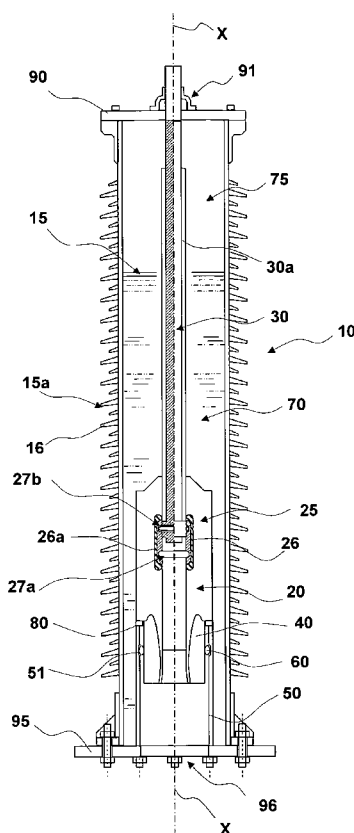


Fig. 1

(57) Abstract: Termination for electrical cables is disclosed comprising an outer insu-
lation tubular body; a conductive rod coaxially arranged within said insulation tubular
body; an elastomeric sleeve coaxially arranged within said insulation tubular body and
extending about an end portion of said conductive rod; a connecting device coaxially
arranged within said elastomeric sleeve, mechanically and electrically connected to
said conductive rod and being adapted to be mechanically and electrically connected to
an electrical cable; a conductive tubular element coaxially arranged within said insu-
lation tubular body and adapted to be electrically connected to the ground; a semi-con-
ductive element coaxially arranged within said conductive tubular element and par-
tially extending inside said elastomeric sleeve on the opposite side to said conductive
rod; at least one elastic conductive element radially interposed between and in a con-
tact with said conductive tubular element and said semi-conductive element. Also dis-
closed is a method for manufacturing a termination for electrical cables and a method
for connecting an electrical cable to a termination for electrical cables.



Published:

— *with international search report (Art. 21(3))*