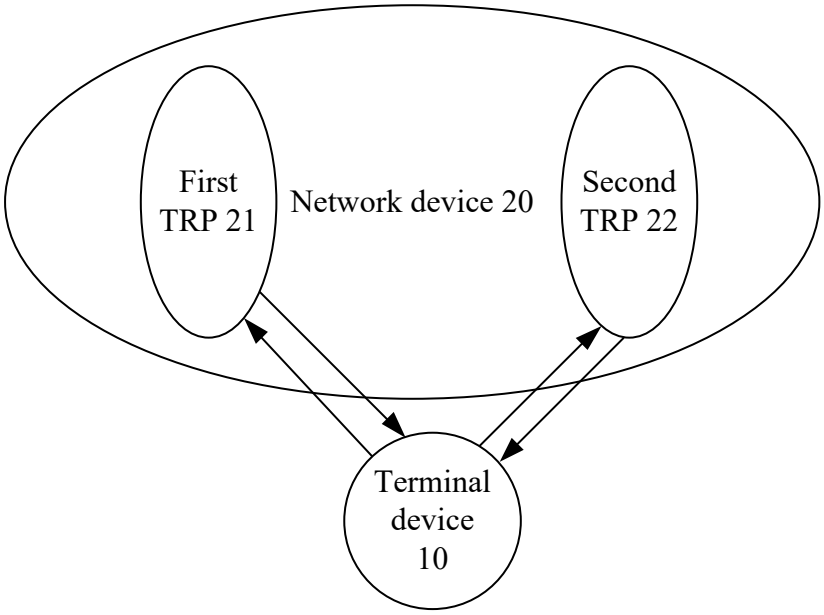
First
TRP 21
Network device 20
Second
TRP 22
Terminal
device
10

FIG. 1

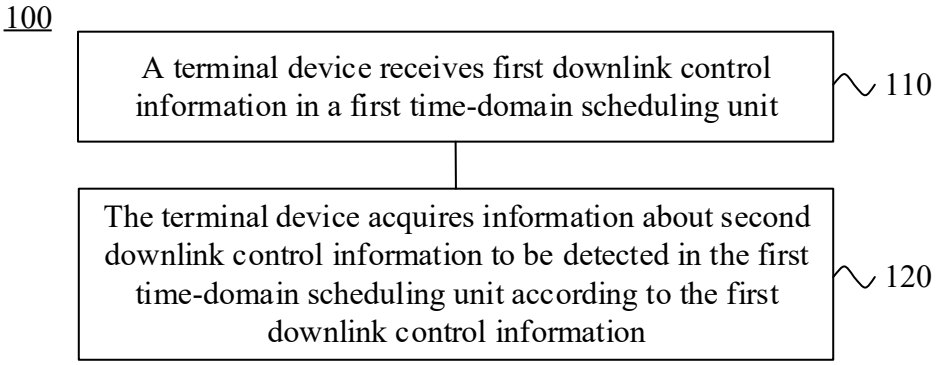
100
A terminal device receives first downlink control information in a first time-domain scheduling unit
110
The terminal device acquires information about second downlink control information to be detected in the first time-domain scheduling unit according to the first downlink control information
120

FIG. 2

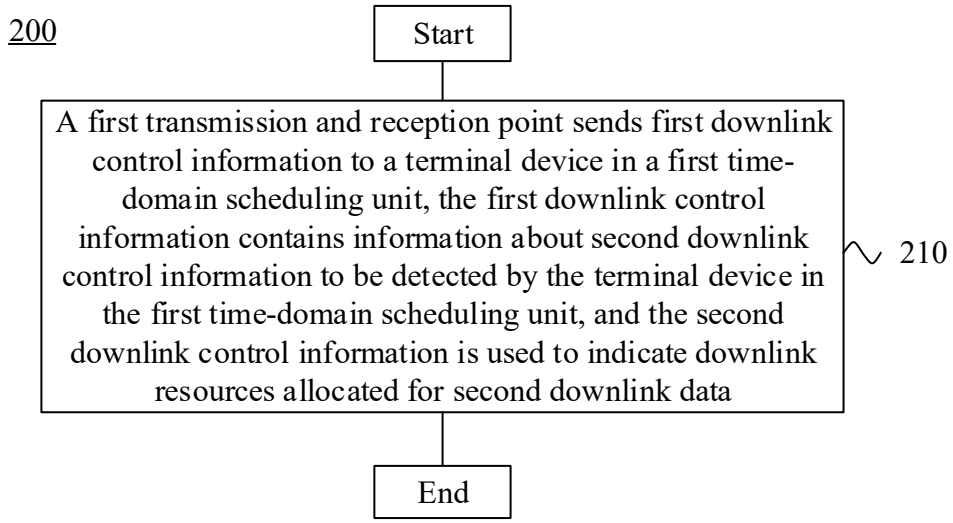

FIG. 3

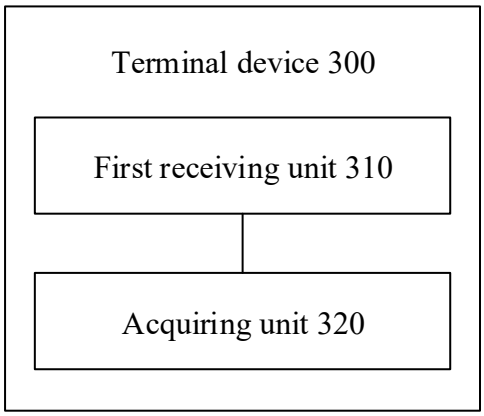

FIG. 4

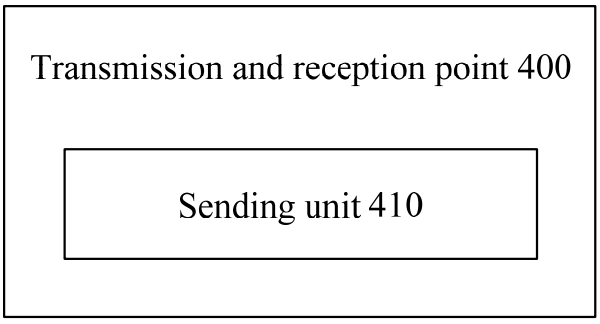

FIG. 5

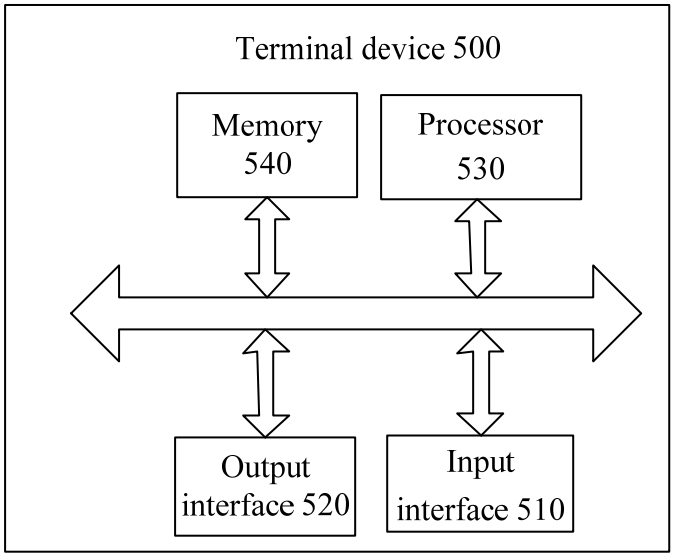
Terminal device 500
Memory
540
Processor
530
Output
interface 520
Input
interface 510

FIG. 6

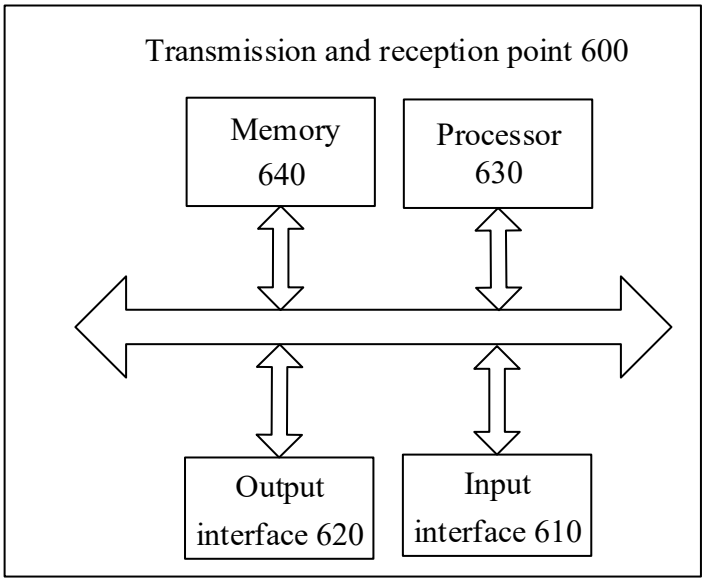
Transmission and reception point 600
Memory
640
Processor
630
Output
interface 620
Input
interface 610

FIG. 7