



- (51) **International Patent Classification:**
C08G 18/70 (2006.01) *C08J 5/24* (2006.01)
C08L 75/12 (2006.01) *G01S 13/00* (2006.01)
- (21) **International Application Number:** PCT/US2014/044211
- (22) **International Filing Date:** 26 June 2014 (26.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/840,911 28 June 2013 (28.06.2013) US
14/314,059 25 June 2014 (25.06.2014) US
- (71) **Applicant:** SAINT-GOBAIN PERFORMANCE PLASTICS CORPORATION [US/US]; 1199 South Chillicothe Rd., Aurora, Ohio 44202 (US).
- (72) **Inventors:** CHEON, Kapsoo; 6 Cardinal Circle, Shrewsbury, Massachusetts 01545 (US). HERSMAN, Marie J.; 28 The Garrison, Dover, New Hampshire 03820 (US). PADWAL, Ajay; 11 Amherst Road, Shrewsbury, Massachusetts 01545 (US).
- (74) **Agent:** ROTHENBERGER, Scott D.; Fulbright & Jaworski LLP, 98 San Jacinto Boulevard, Suite 1100, Austin, Texas 78701 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** CYANATE RESIN BLENDS AND RADOMES INCLUDING THEM

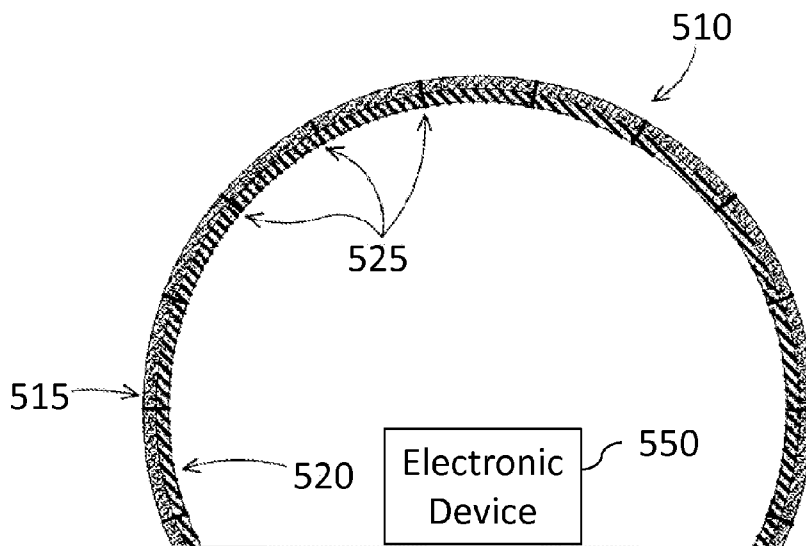


FIG. 5

(57) **Abstract:** Certain embodiments are directed to cyanate resin blends comprising, for example, a mixture of a cyanate monomer and a cyanate oligomer. The resin blends are effective to provide a dielectric constant of less than 2.7, a glass transition temperature of at least 150°C and a moisture absorption of less than 1.5%. Radomes using the resin are also described.





Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))