



(51) International Patent Classification:
H04B 1/59 (2006.01)

(21) International Application Number:
PCT/US2010/045496

(22) International Filing Date:
13 August 2010 (13.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **GEORGIA TECH RESEARCH CORPORATION** [US/US]; 505 Tenth Street, Atlanta, Georgia 30332 (US).

(72) Inventor; and

(71) Applicant : **FENTEM, David** [US/US]; 704 Emerald Forest Circle, Lawrenceville, Georgia 30044 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BENNETT, Gisele** [US/US]; PO Box 78392, Atlanta, Georgia 30357 (US). **JAMES, Jonathan, C.** [US/US]; 1779 Highlands View Dr, Smyrna, Georgia 30082 (US). **STRIKE, Timothy, M.** [US/US]; 73 Stone Mill Lane, Marietta, Georgia 30064 (US). **HARAN, Terence** [US/US]; 1026 Queensgate Drive, Smyrna, Georgia 30082 (US). **TOLER, Tedd** [US/US]; 400 Tenth Street, Atlanta, Georgia 30332 (US). **BRACKETT, Benjamin** [US/US]; 400 Tenth Street, At-

lanta, Georgia 30332 (US). **JO, Jeffrey** [US/US]; 925 Dalney Street, Atlanta, Georgia 30332 (US).

(74) Agent: **YANCEY, James, Hunt, Jr.**; Troutman Sanders LLP, 5200 Bank Of America Plaza, 600 Peachtree Street, Atlanta, Georgia 30308 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONTAINER STATUS MONITORING SYSTEMS & METHODS

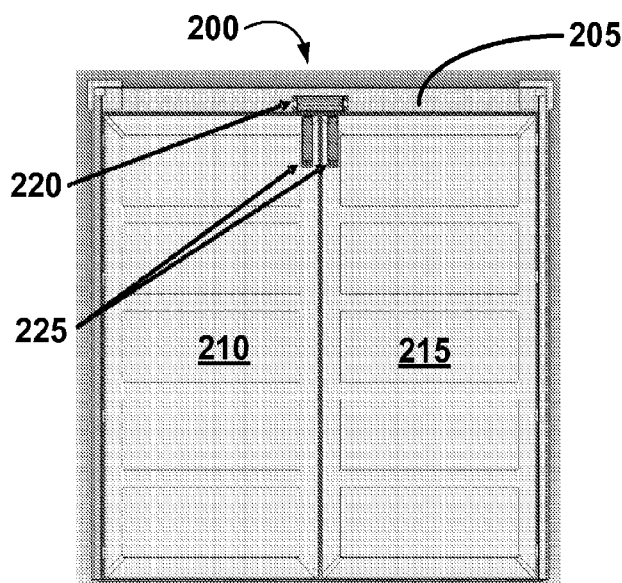


FIG. 2

(57) Abstract: A container monitoring system can generally comprise a first door controller, a second door controller, and a controller module. The first door controller module can be disposed in communication with a controller module. The first door controller module can be configured to receive a first random generated code from the controller module and further configured to store the first random generated code. The second door controller module can be disposed in communication with the controller module. The second door controller module can be configured to receive a second random generated code from the controller module and further configured to store the second random generated code. The controller module can be configured to separately interrogate the first door controller and the second door controller and configured to establish an alarm condition based on one or more signals received from the first door controller and the second door controller.



Published:

— with international search report (Art. 21(3))