(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 January 2024 (18.01.2024)

WIPO | PCT

(10) International Publication Number
WO 2024/013615 A1

(51) International Patent Classification:
B60B 27/02 (2006.01) *F16D 41/32* (2006.01)

(21) International Application Number:
PCT/IB2023/056963

(22) International Filing Date:
05 July 2023 (05.07.2023)

(25) Filing Language: Polish

(26) Publication Language: English

(30) Priority Data:
P.441744 15 July 2022 (15.07.2022) PL

(72) Inventor; and
(71) Applicant: **KOZAK, Mariusz** [PL/PL]; SOUL-KOZAK Mariusz Kozak, ul. Szeroka 3, Franciszków, 21-040 Świdnik (PL).

(74) Agent: **TARAŁA, Magdalena**; Wolska 11A, 20-411 Lublin (PL).


(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

WO 2024/013615 A1

(54) **Title:** BICYCLE REAR WHEEL

Fig.3

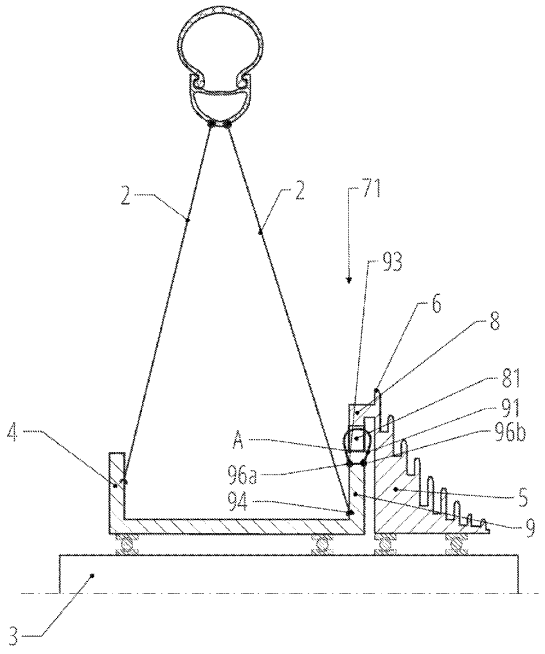

(57) **Abstract:** Rear wheel for a bicycle comprising a tire rim (1) with spokes (2), a hub body (4), a hub axle (3) on which a chain drive wheel (5, 6) is mounted, and a one-way clutch assembly (71, 72), wherein the clutch assembly comprises a wreath (8), with internal teeth (81), and a disc (9), with at least one hook (91) for engaging the internal teeth, arranged coaxially, wherein the wreath has an internal radius (R) defining the circle on which the tips (A) of the internal teeth lie, which is greater than the radius (r) of the circle (92) on the disc on which there is a fixation (93) of the at least one hook, and wherein one of the wreath and the disc is integrated with the chain drive wheel, and the spokes are fixed to the other of the disc and the wreath.

[Continued on next page]

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*