

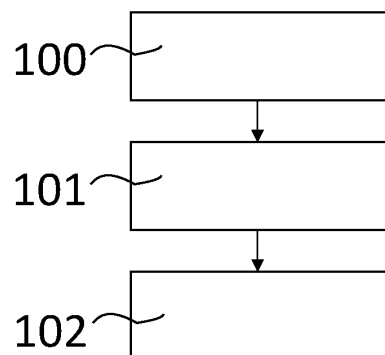


Fig. 1

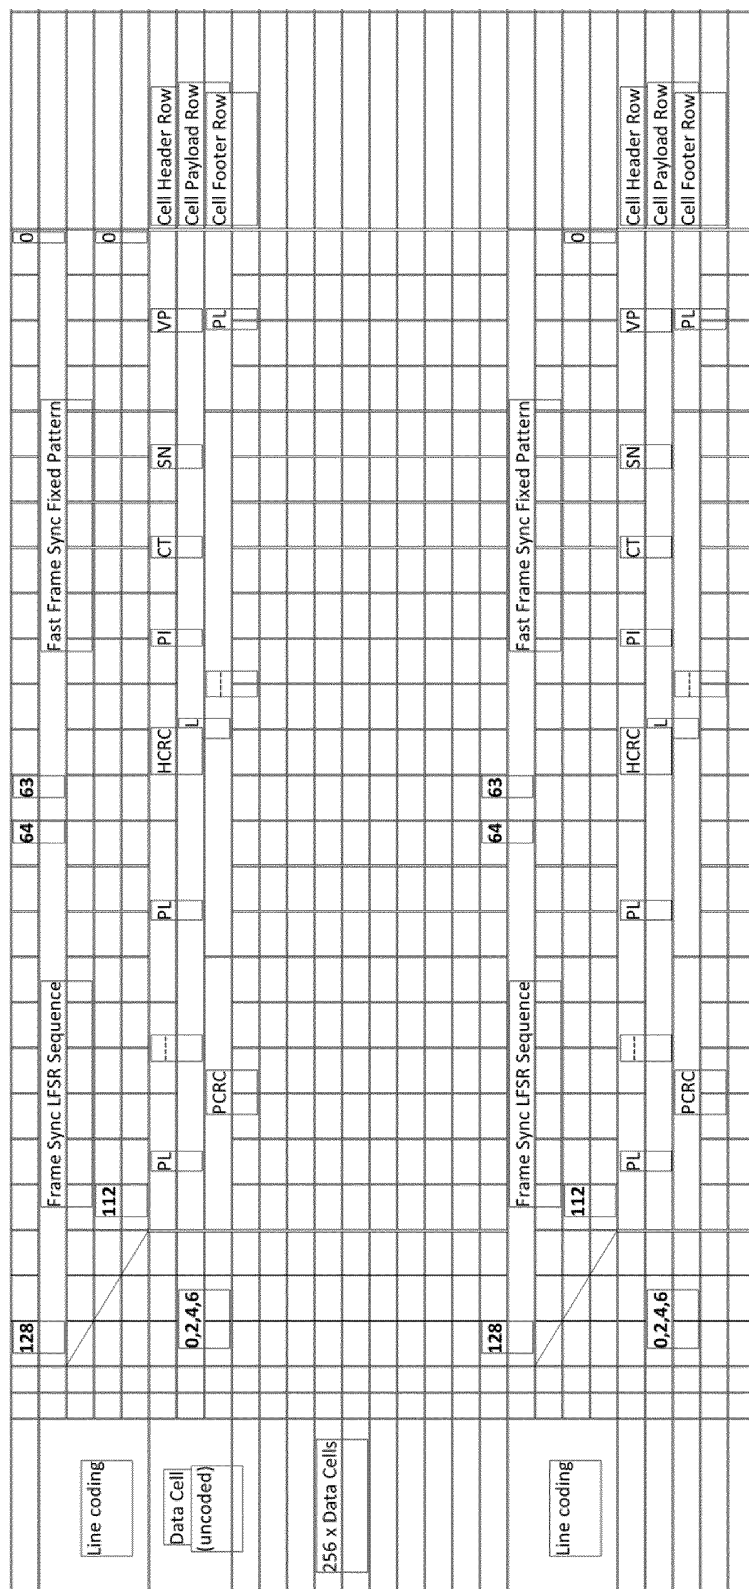


Fig. 2

VP	7	Virtual Path Identifier	
SN	3	Running Serial Nr.	
CT	2	Cell Type	
HCRC	10	Header CRC	HD=5; max:21 Bit; p=0x2b9
PI	3	Paload Info	
PL	187 / 411 / 635 / 859	Payload	
PCRC	12	Payload CRC	HD=4; max:2035 Bit; p=0x8f3

Fig. 3

L	B	P
-	-	187
-	+	411
+	-	635
+	+	859

Fig. 4A

L	B	P
-	-	187
+	-	411
-	+	635
+	+	859

Fig. 4B

DATA		SYMBOL(S)	
0	00000000000000	1111010000001011	0000101111110100
1	000000000000001	1111001000001101	0000110111110010
2	000000000000010	1111000100001110	0000111011110001
...	...		
...	...		
16381	11111111111101	1011110001000011	0100001110111100
16382	11111111111110	1011101101000100	0100010010111011
16383	11111111111111	1101110100100010	0010001011011101

Fig. 5