

1/16

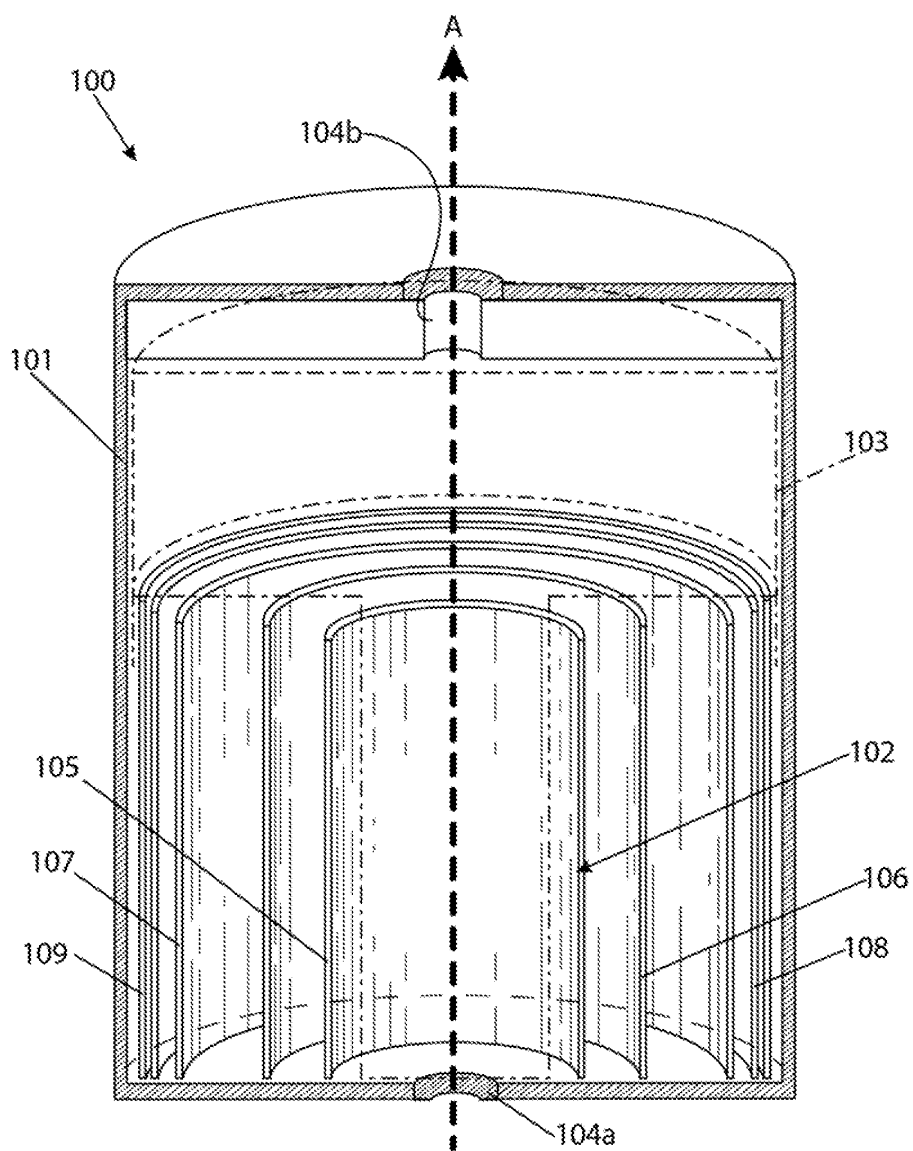


FIG. 1

2/16

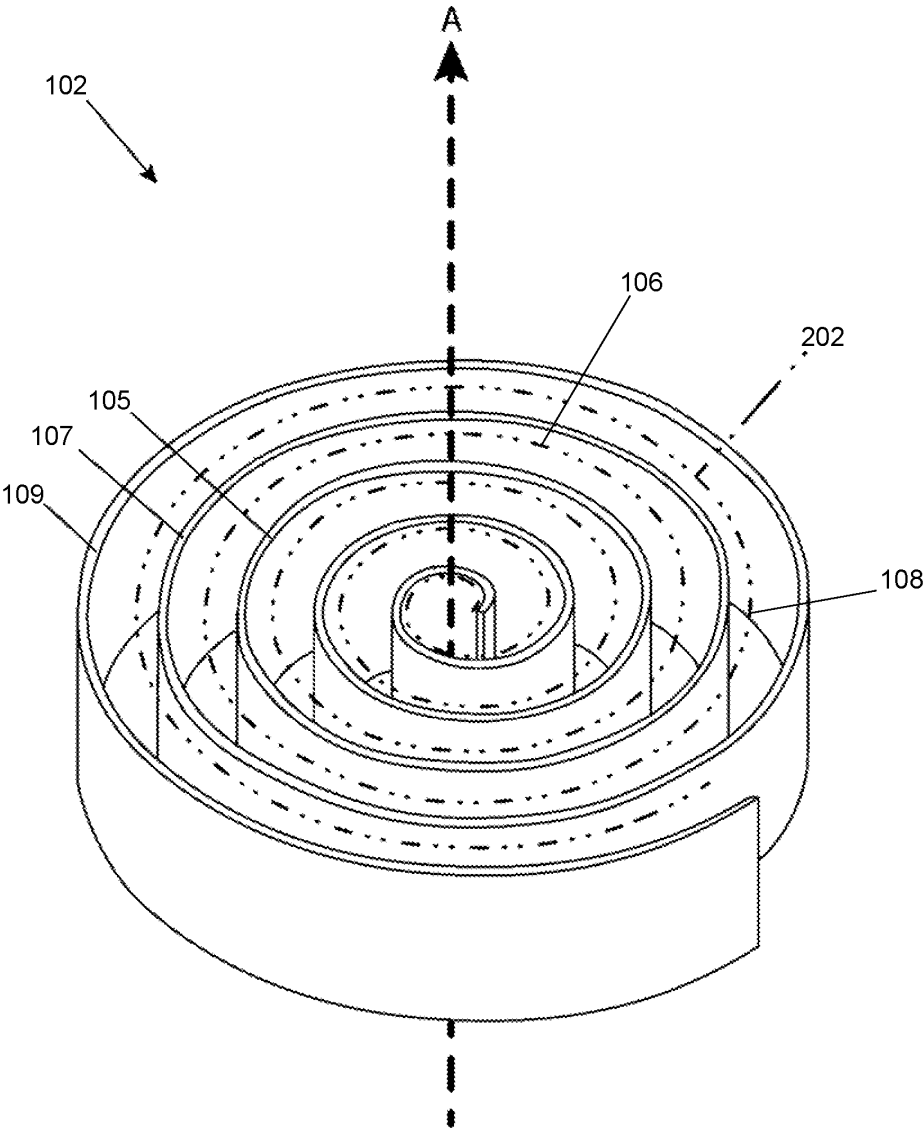


FIG. 2

3/16




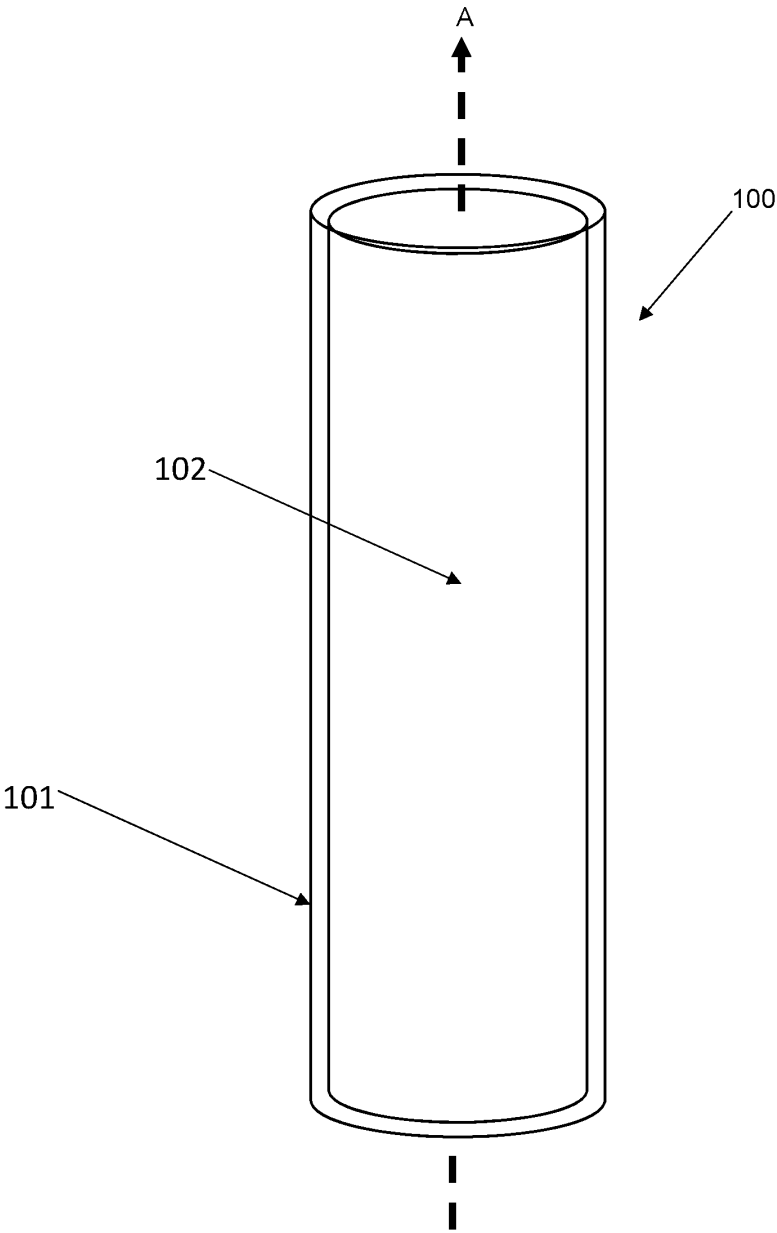


FIG. 3

4/16

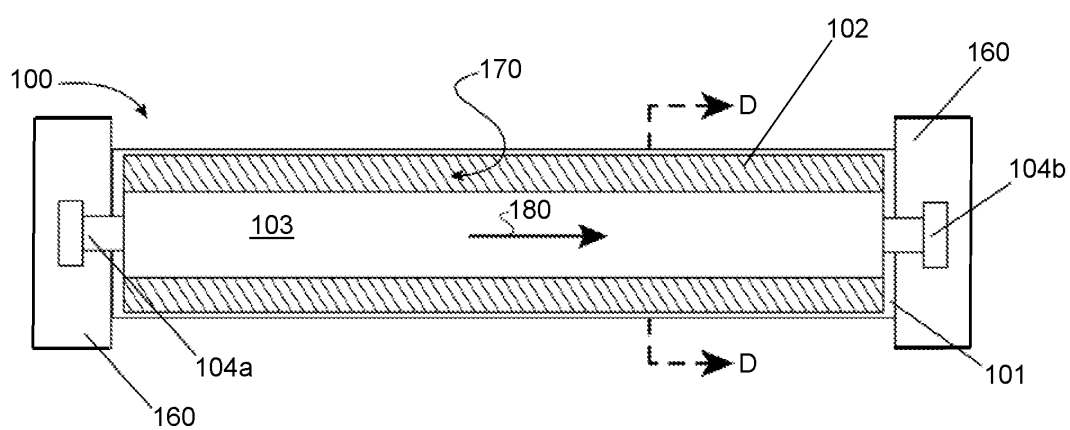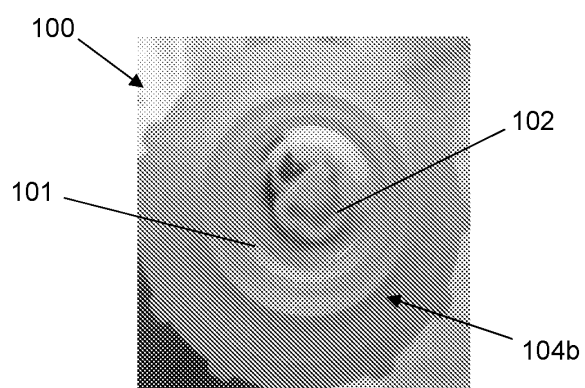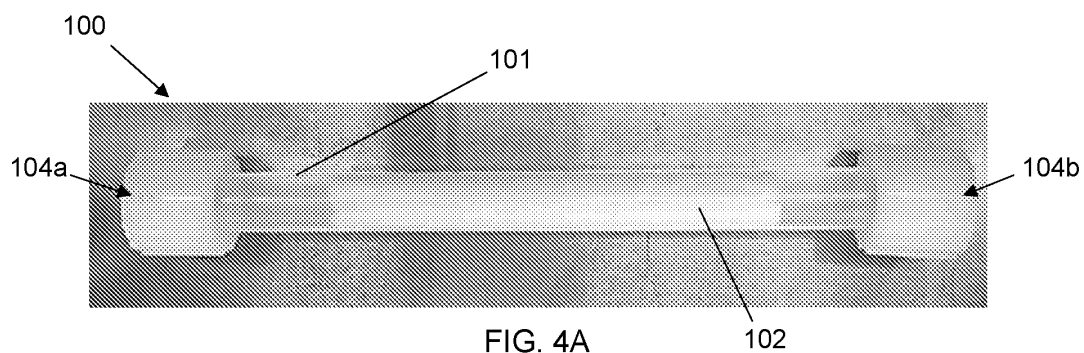

5/16

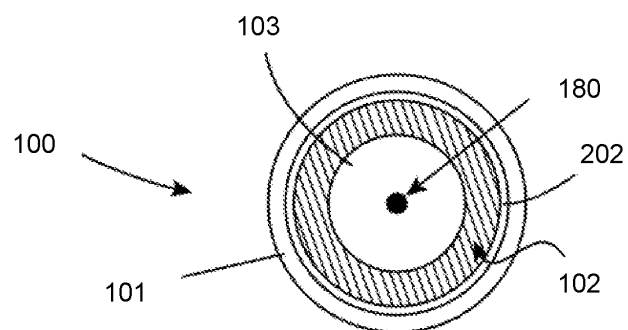


FIG. 4D

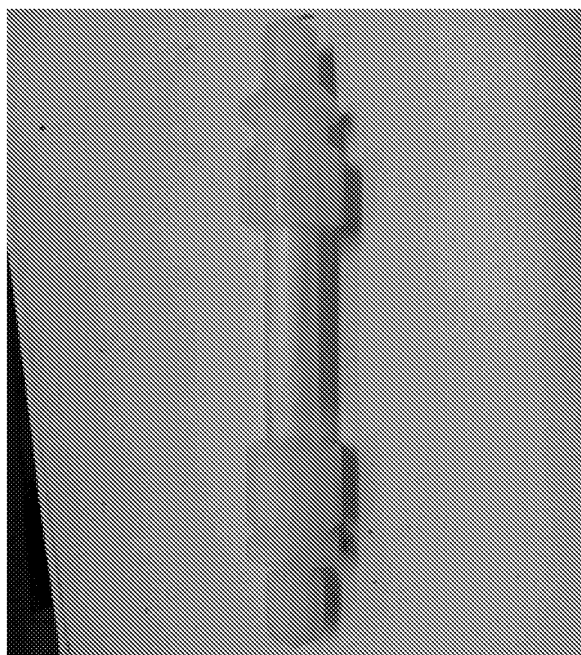


FIG. 4E

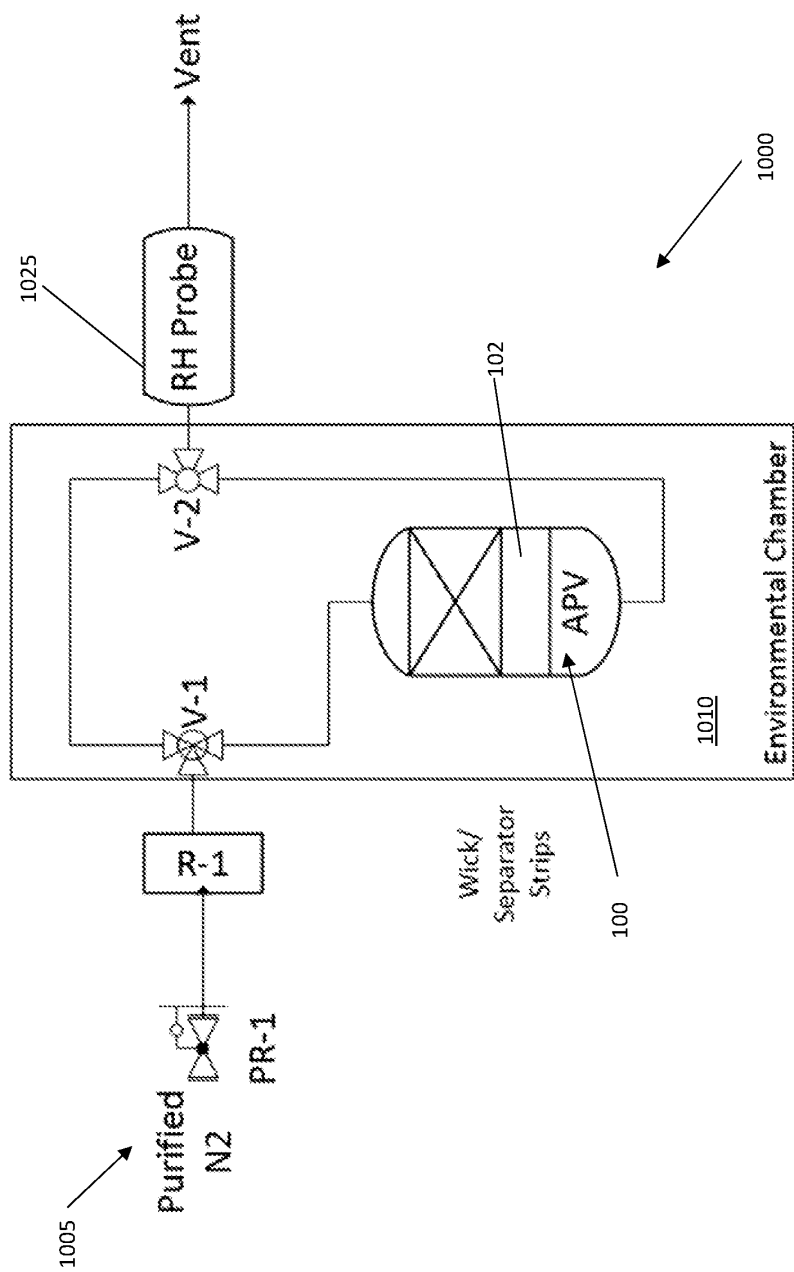


FIG. 5

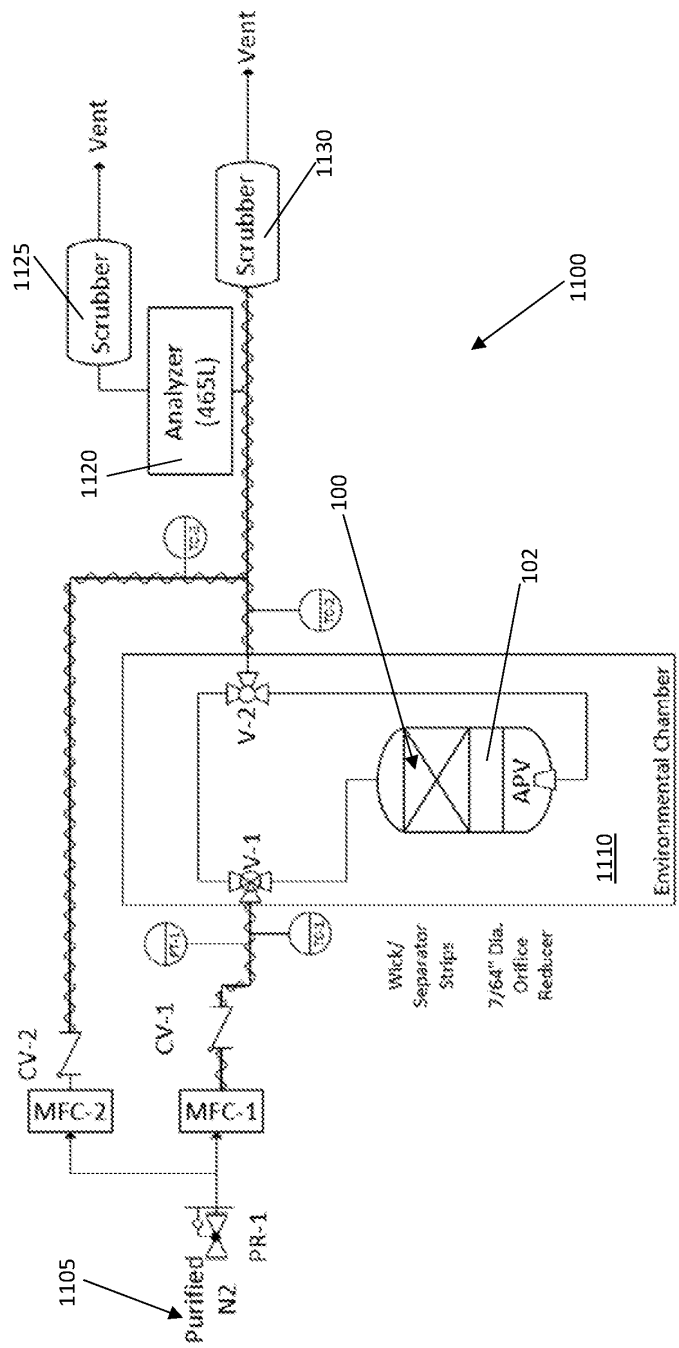


FIG. 6

8/16

Sample 11b, 71 GSM, Needle Punched, PP Vapor Output at 35°C/ 500sccm N<sub>2</sub>

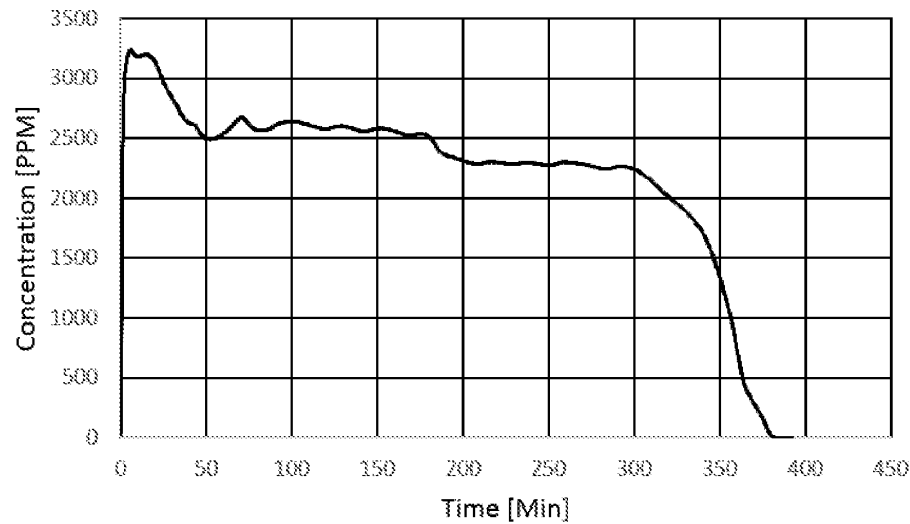


FIG. 7

40 GSM, Spunbound, PP Vapor Output at 35°C/ 500sccm N<sub>2</sub>

Sample 8 PP/40SB

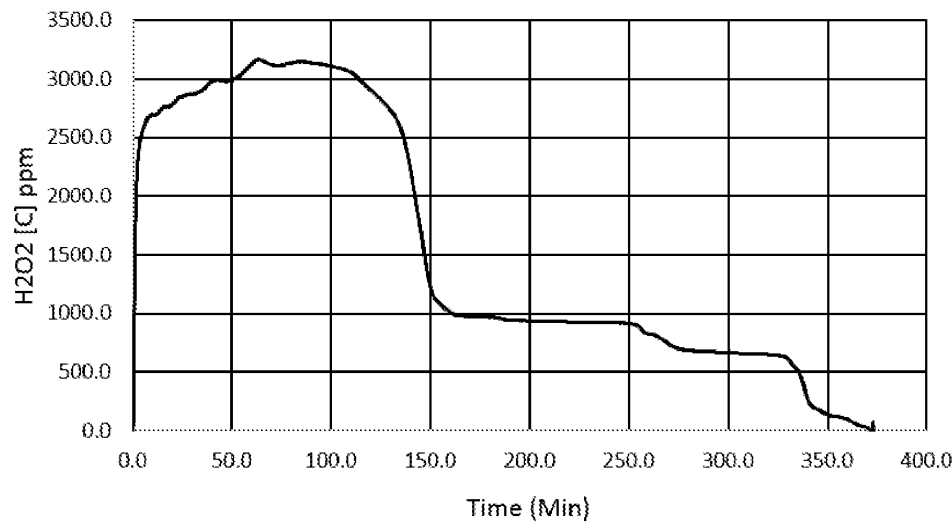


FIG. 8

9/16

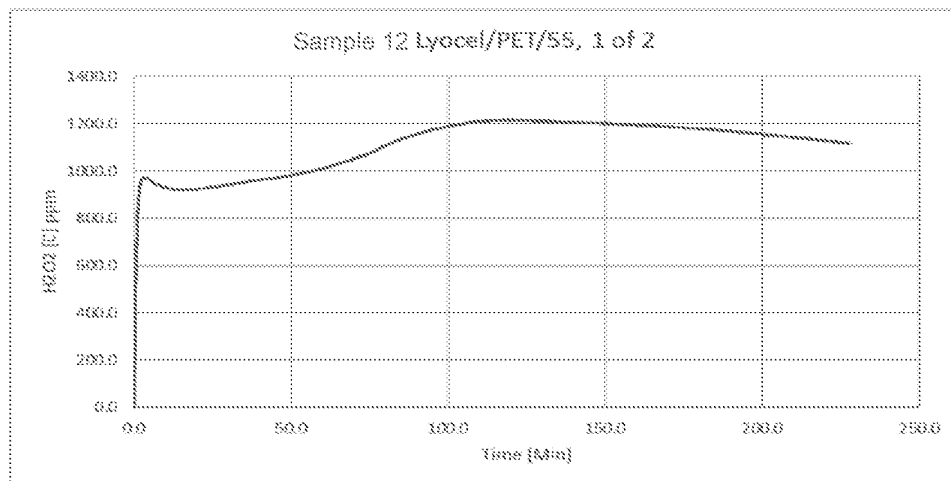
55 GSM, Spunlace, Lyocel/PET Vapor Output at 35°C/ 500sccm N<sub>2</sub>

FIG. 9

100 GSM, Spunlace Lyocel/PET Vapor Output at 35°C/ 500sccm N<sub>2</sub>

Sample 12 Lyocel/PET/55SL, 2 of 2

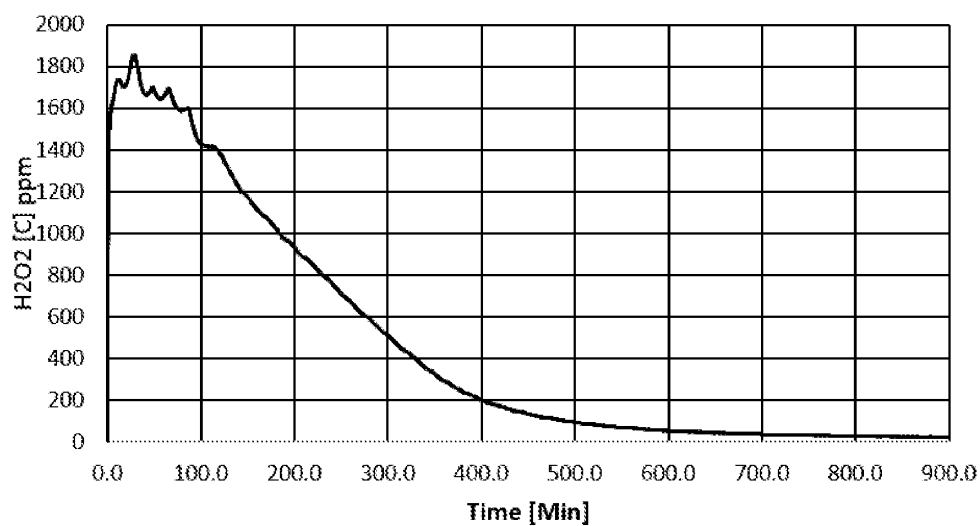


FIG. 10

10/16

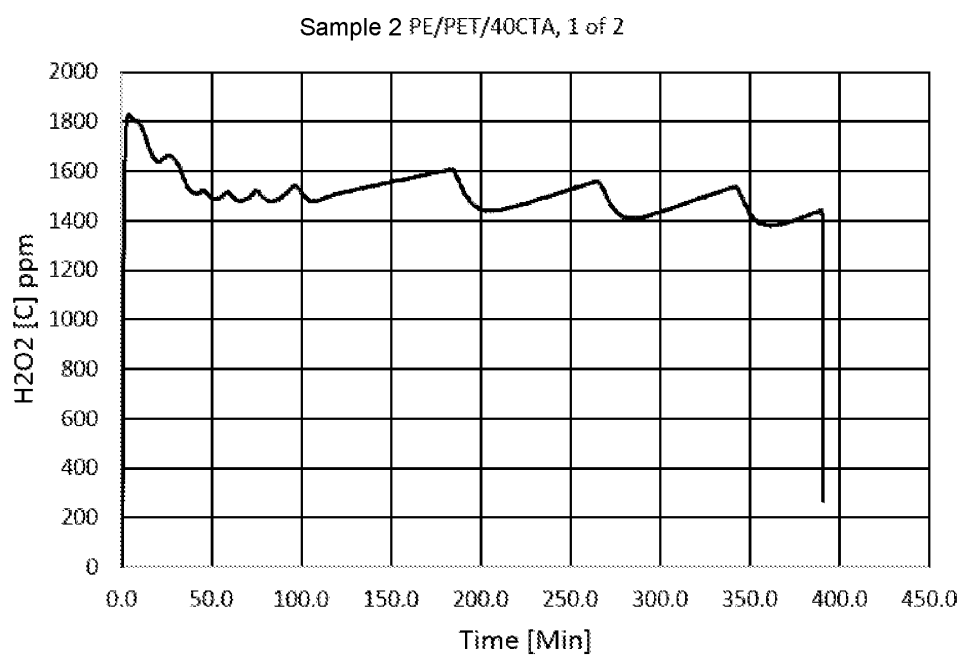


FIG. 11

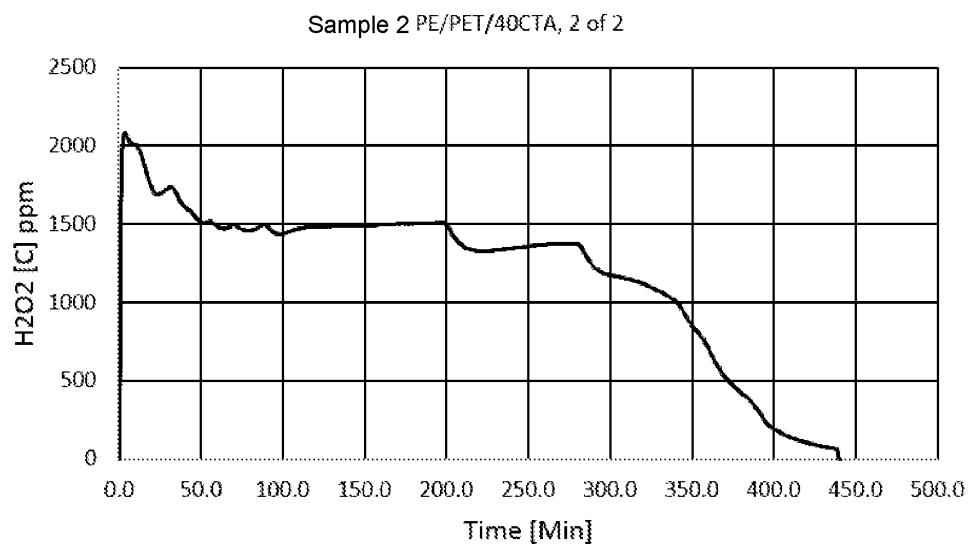


FIG. 12

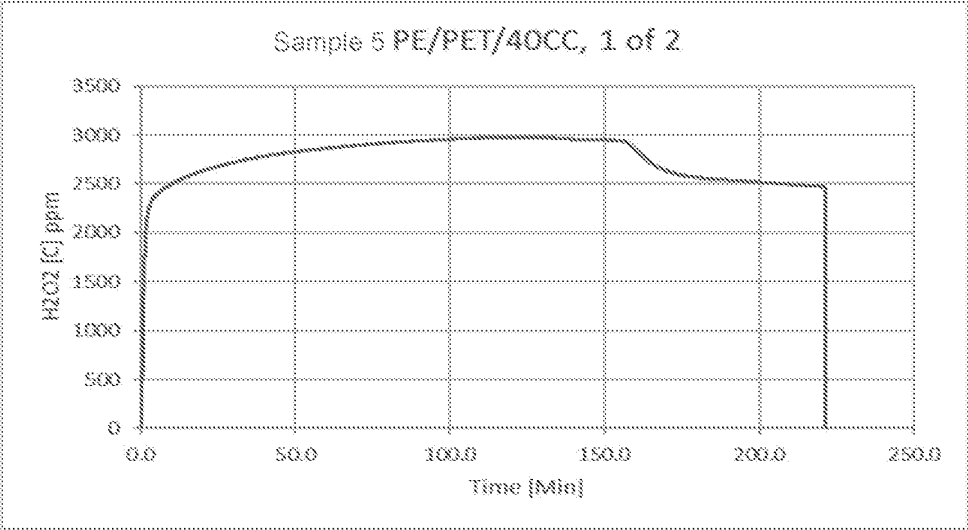


FIG. 13

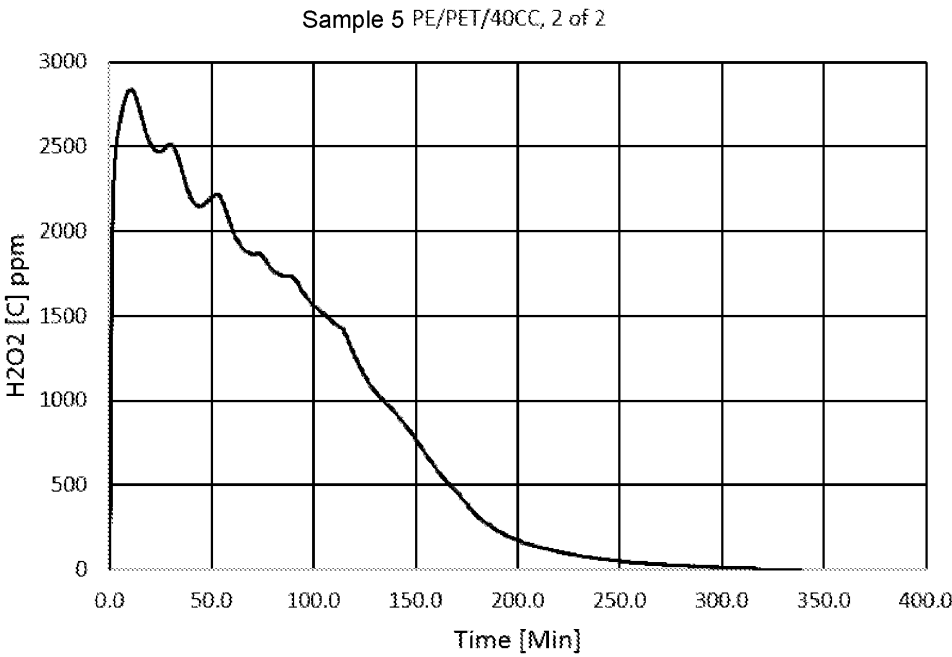


FIG. 14

12/16

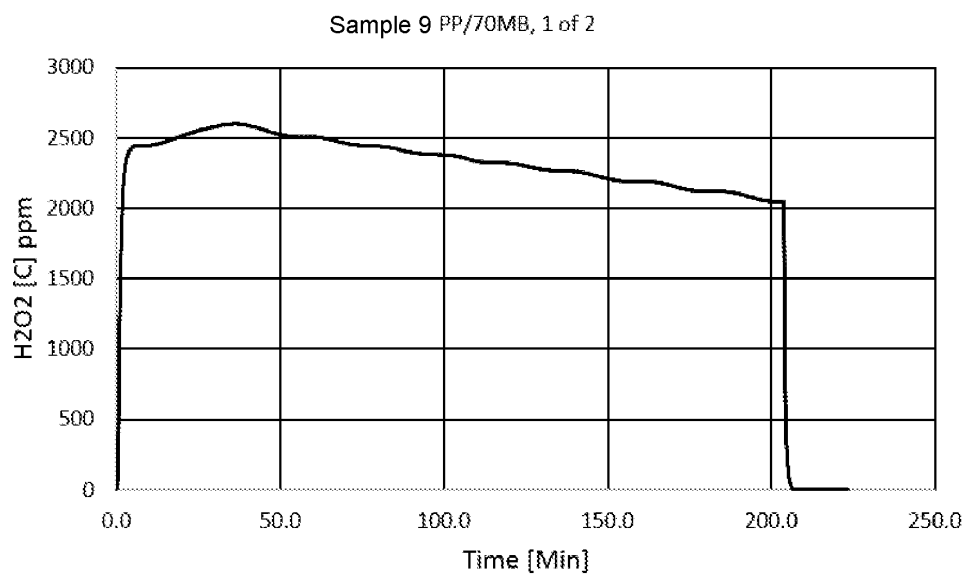


FIG. 15

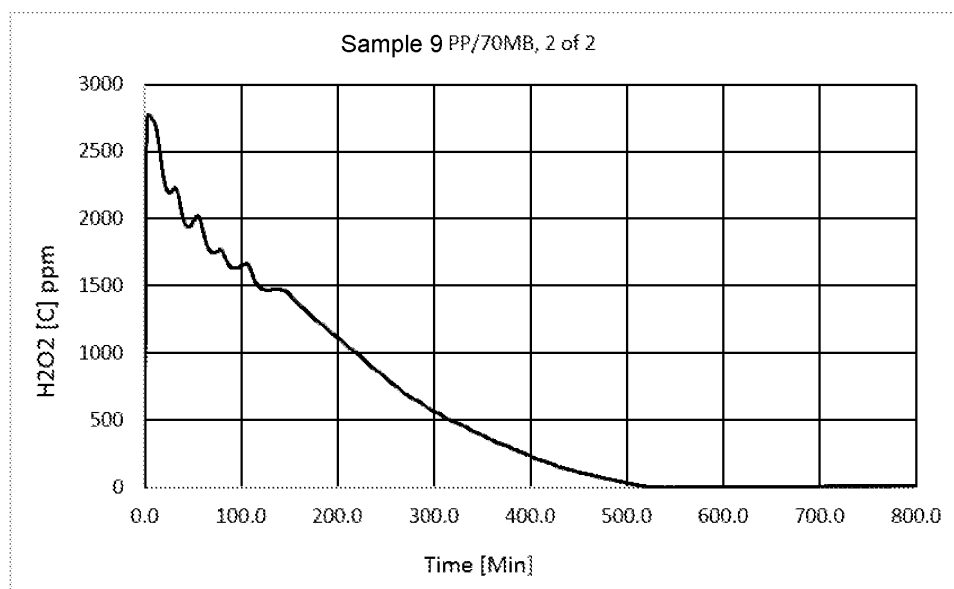


FIG. 16

13/16

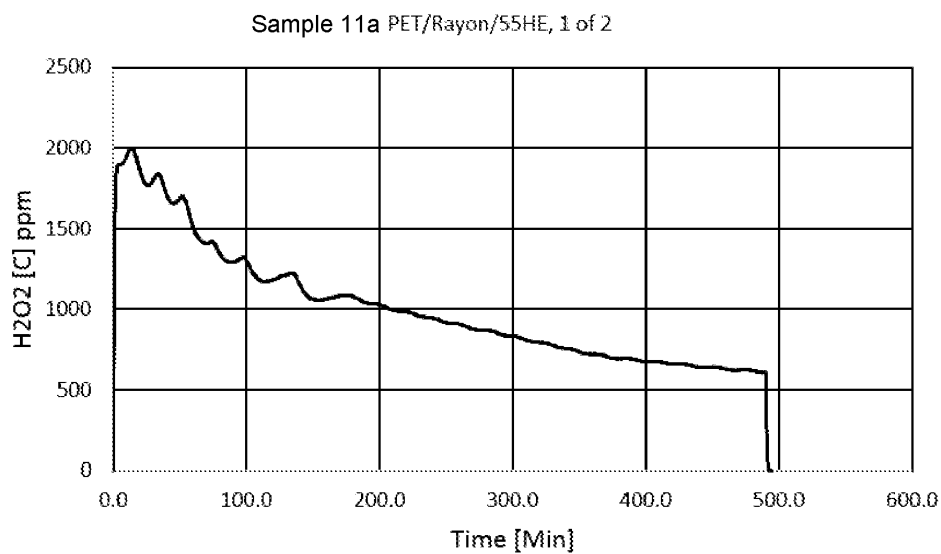


FIG. 17

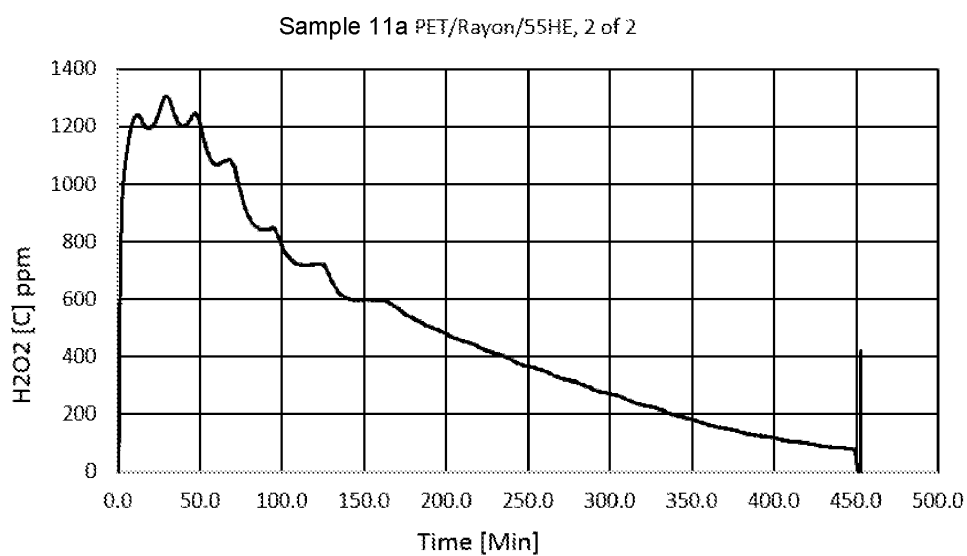


FIG. 18

14/16

Vapor pressure rise over 60 minutes (Sample 8)

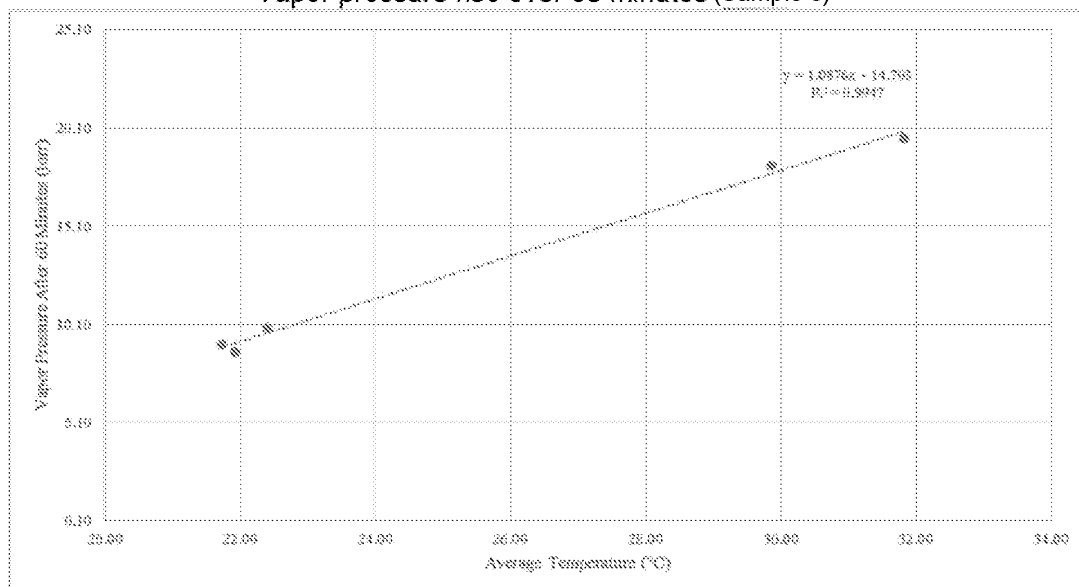


FIG. 19

50wt% HP Vapor Output Using Non-Woven Wicks at 35°C Result Summary

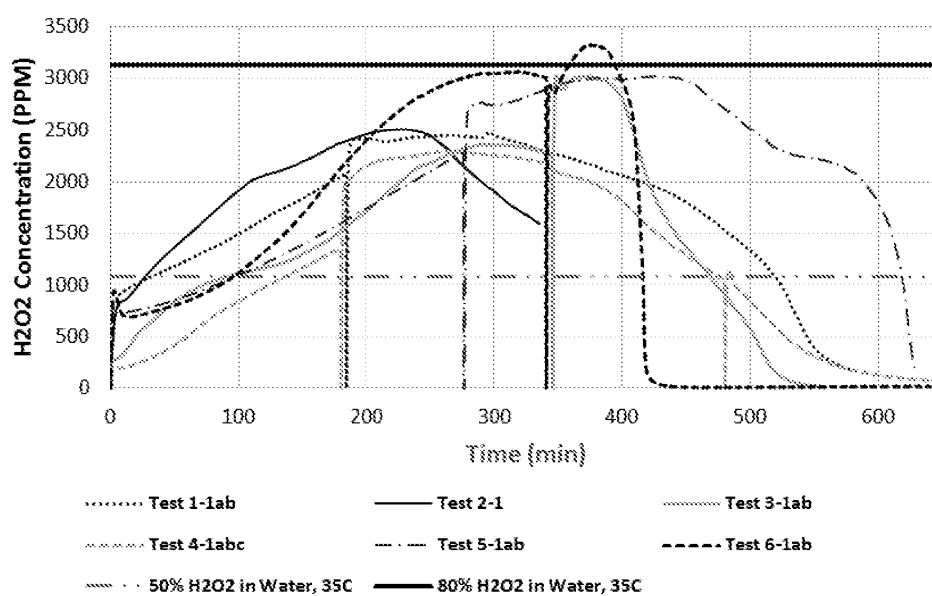


FIG. 20

15/16

HP Vapor Output Using PEG 40% hydrogel at 35°C Result Summary  
(Average of output calculated from output between 30 and 300 minutes)

PEG 40%

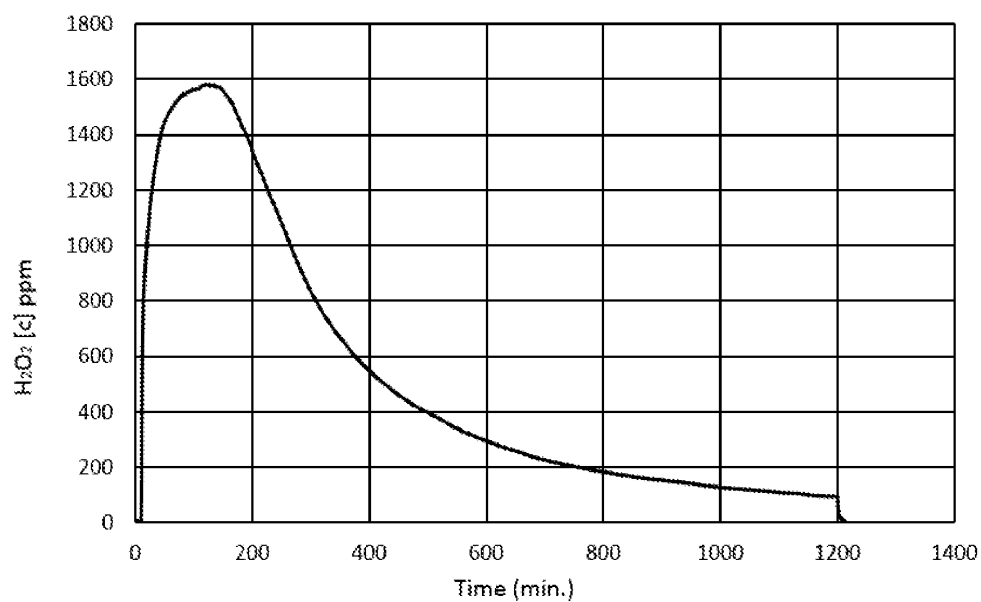


FIG. 21

HP Vapor Output Using PEG 20% hydrogel at 35°C Result Summary

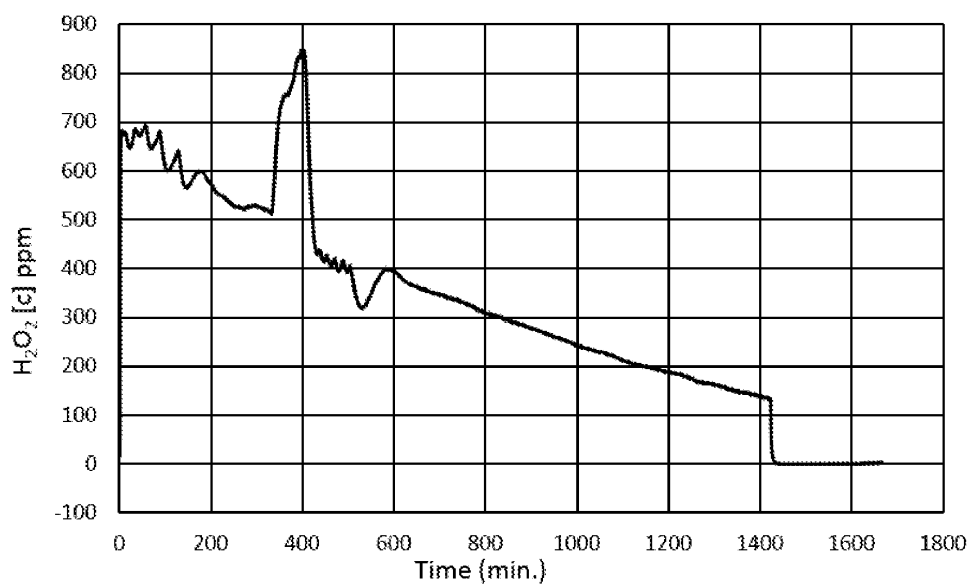


FIG. 22

16/16

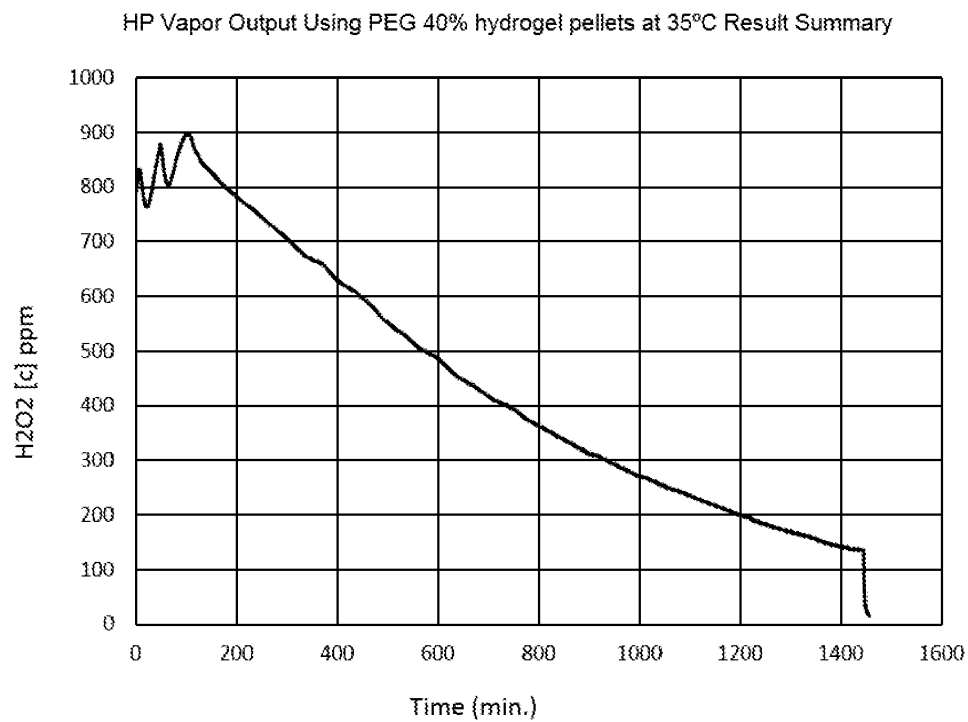


FIG. 23