

FIG. 1

Send indication information to a terminal, where the indication information is used to indicate an uplink channel related transmission parameter, the transmission parameter corresponds to N uplink channels and/or at least two target transmissions of a target uplink channel, and N is an integer greater than 1

201

FIG. 2

Bit field mapped to index	Codepoint
0	1 layer: TPMI = 0
1	1 layer: TPMI = 1
...	...
3	1 layer: TPMI = 3
4	2 layers: TPMI = 0
...	...
9	2 layers: TPMI = 5
10	3 layers: TPMI = 0
11	4 layers: TPMI = 0
12 to 15	Reserved

FIG. 3a

Bit field mapped to index	Codepoint
0	1 layer: TPMI = 0
1	1 layer: TPMI = 1
...	...
3	1 layer: TPMI = 3
4	2 layers: TPMI = 100
...	...
9	10 layers: TPMI = 5
10	3 layers: TPMI = 0
11	4 layers: TPMI = 0
12	Uplink transmission scheme
13 to 15	Reserved
16 to 31	New

FIG. 3b

Bit field mapped to index	Codepoint
0	1 layer: TPMI = 0
1	1 layer: TPMI = 1
...	...
3	1 layer: TPMI = 3
4	Reserved
...	Reserved
9	Reserved
10	Reserved
11	Reserved
12 to 15	Reserved

FIG. 3c

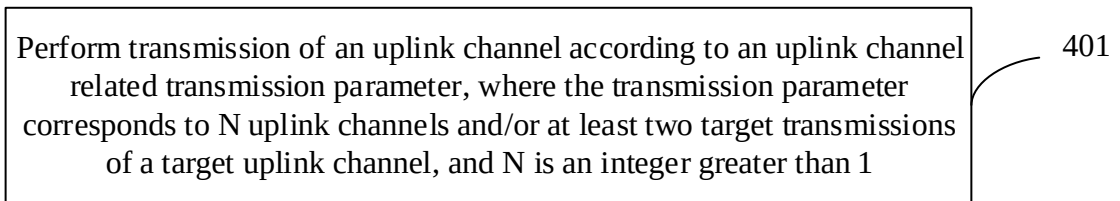


FIG. 4

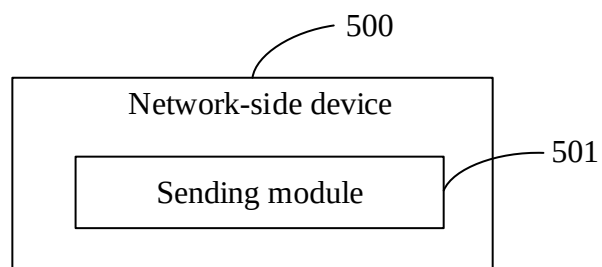


FIG. 5

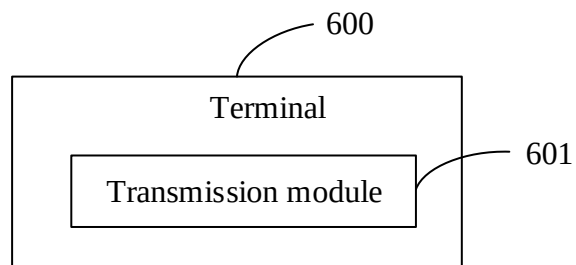


FIG. 6

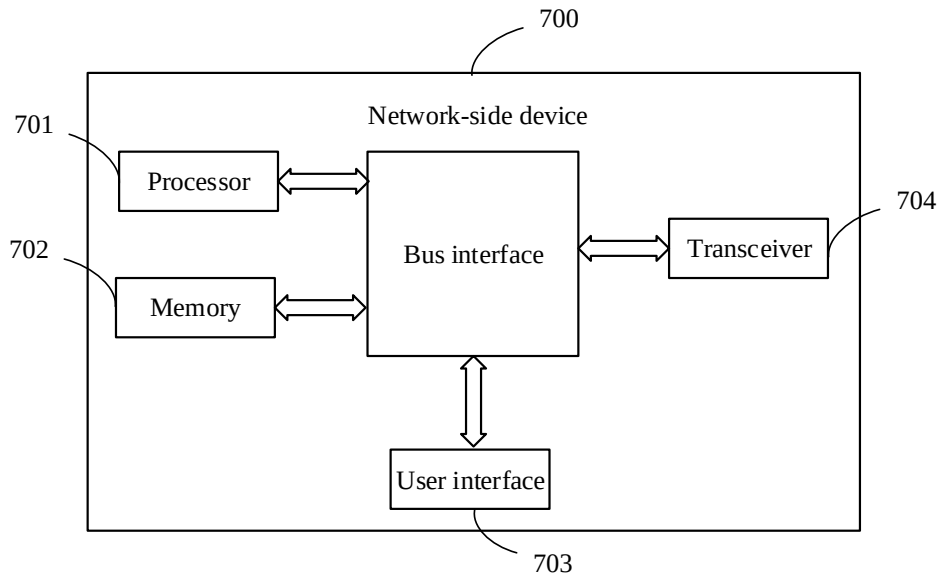


FIG. 7

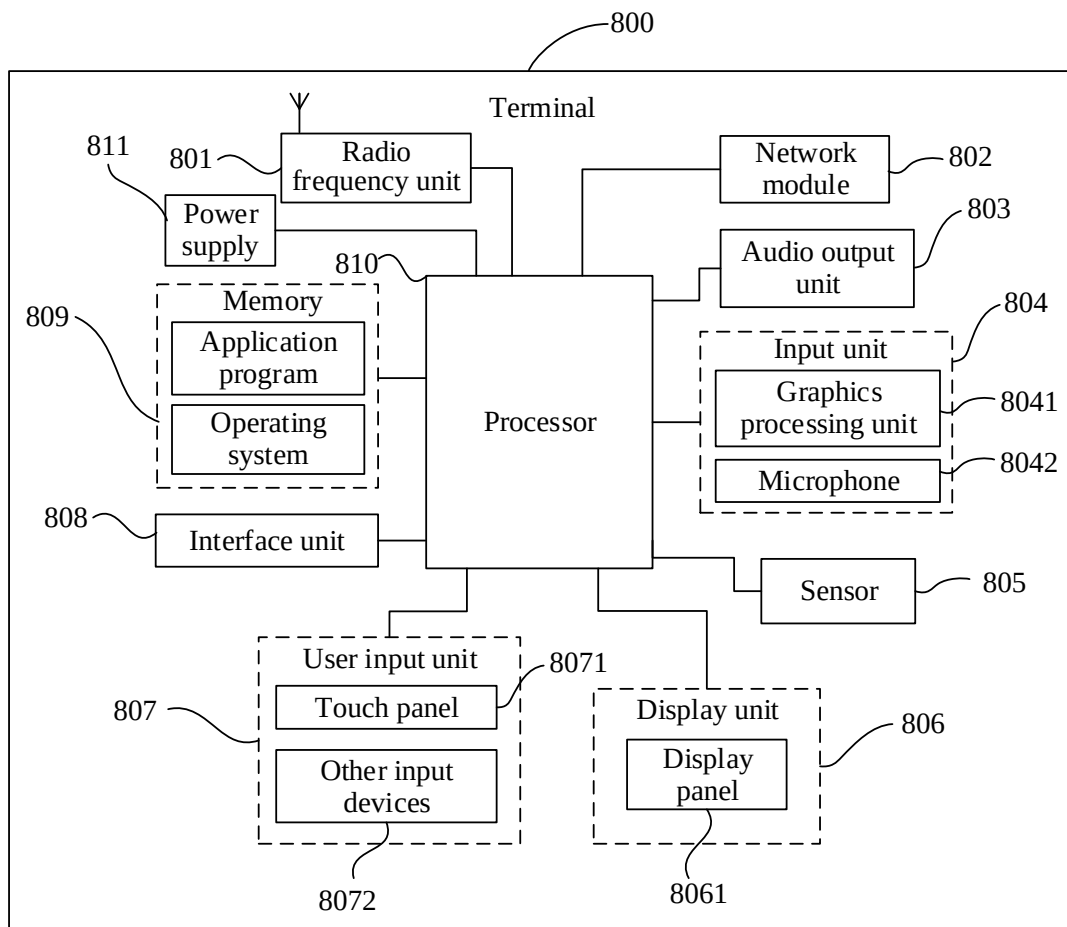


FIG. 8