

FIG. 1

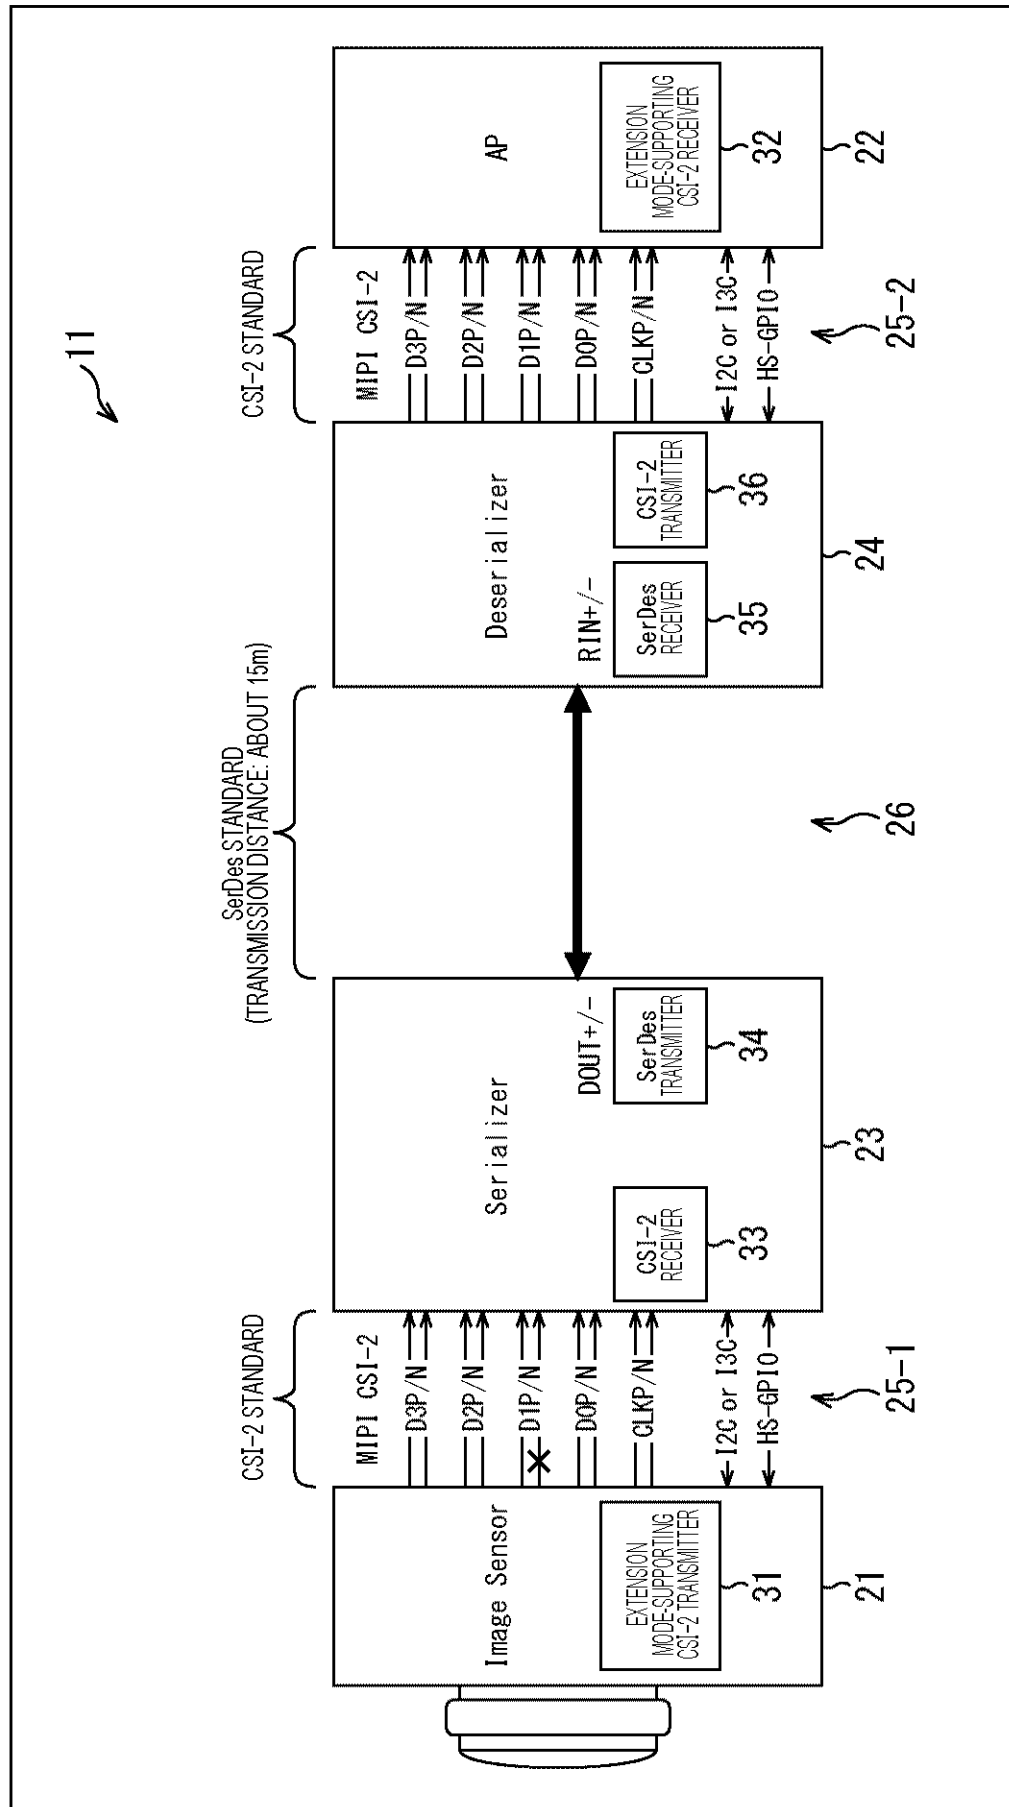


FIG. 2

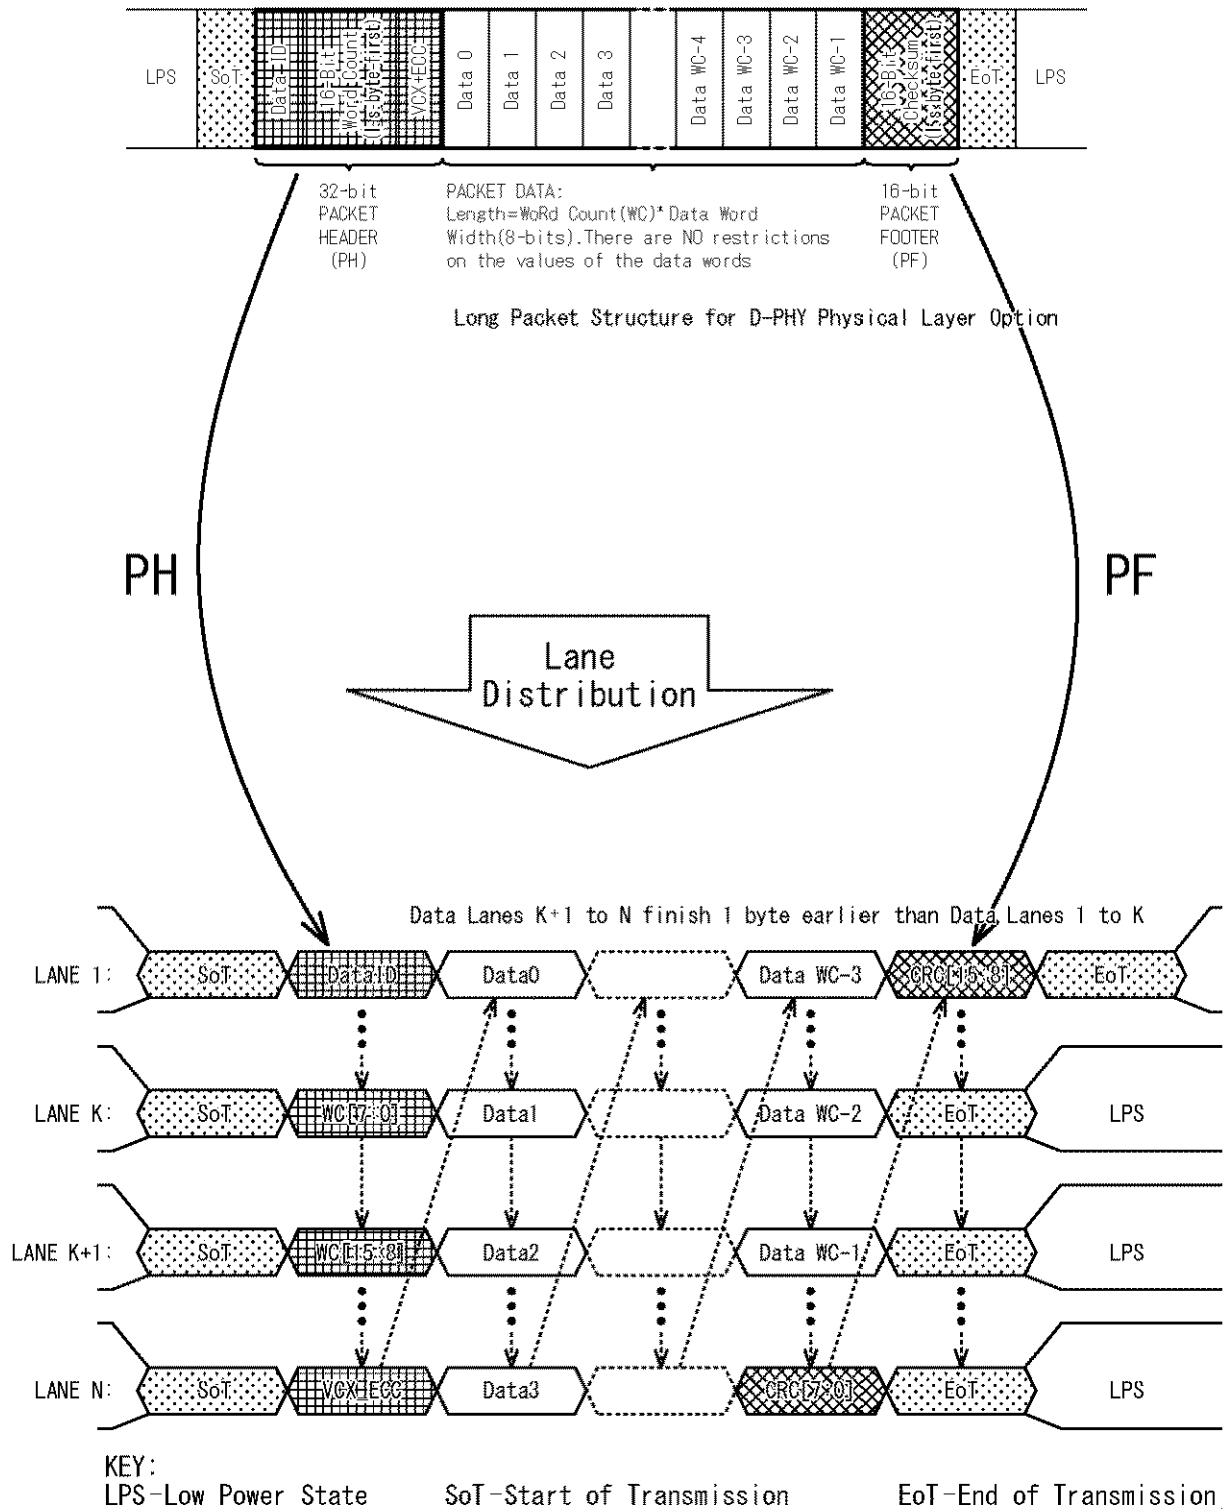
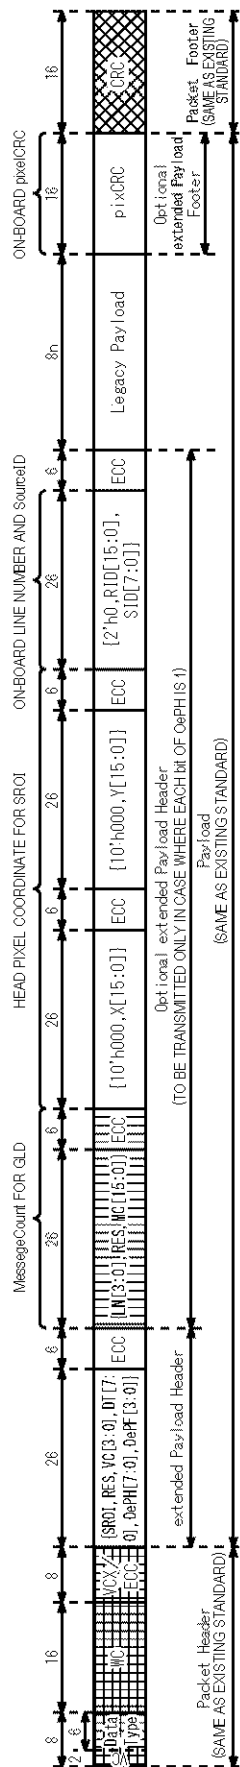
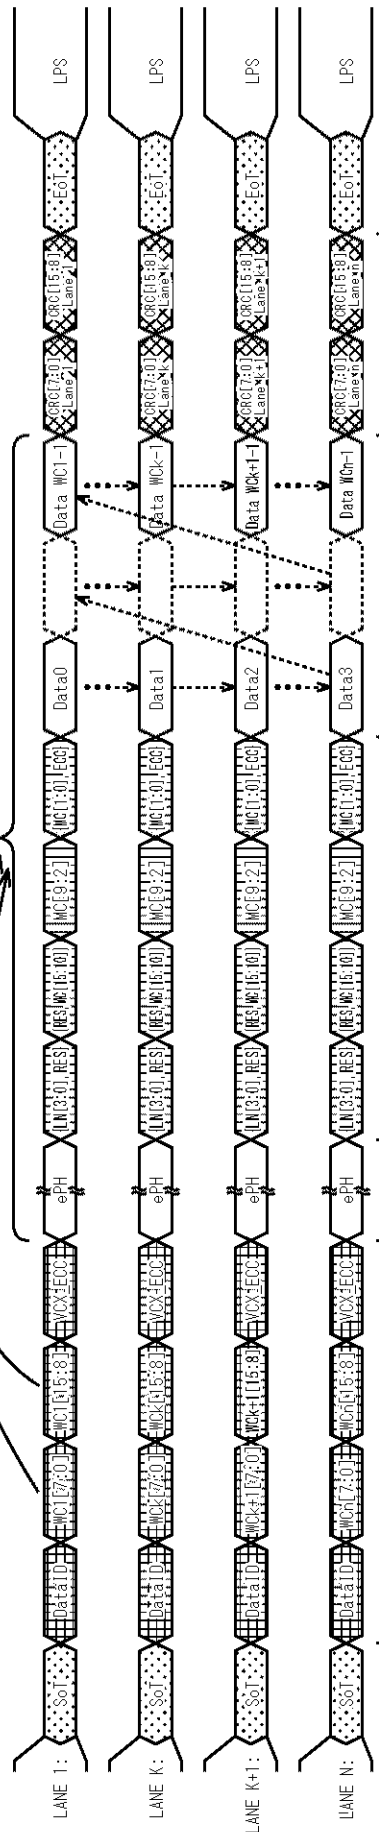


FIG. 3



Lane Distribution

WC IS NUMBER OF BYTES OF Payload OF EACH LANE



PH (CRC) IS TRANSMITTED INDEPENDENTLY IN EACH Lane
CRC IS CALCULATED FROM Payload OF EACH Lane

MC IS TRANSMITTED INDEPENDENTLY IN EACH Lane

PF IS TRANSMITTED INDEPENDENTLY IN EACH Lane

FIG. 4

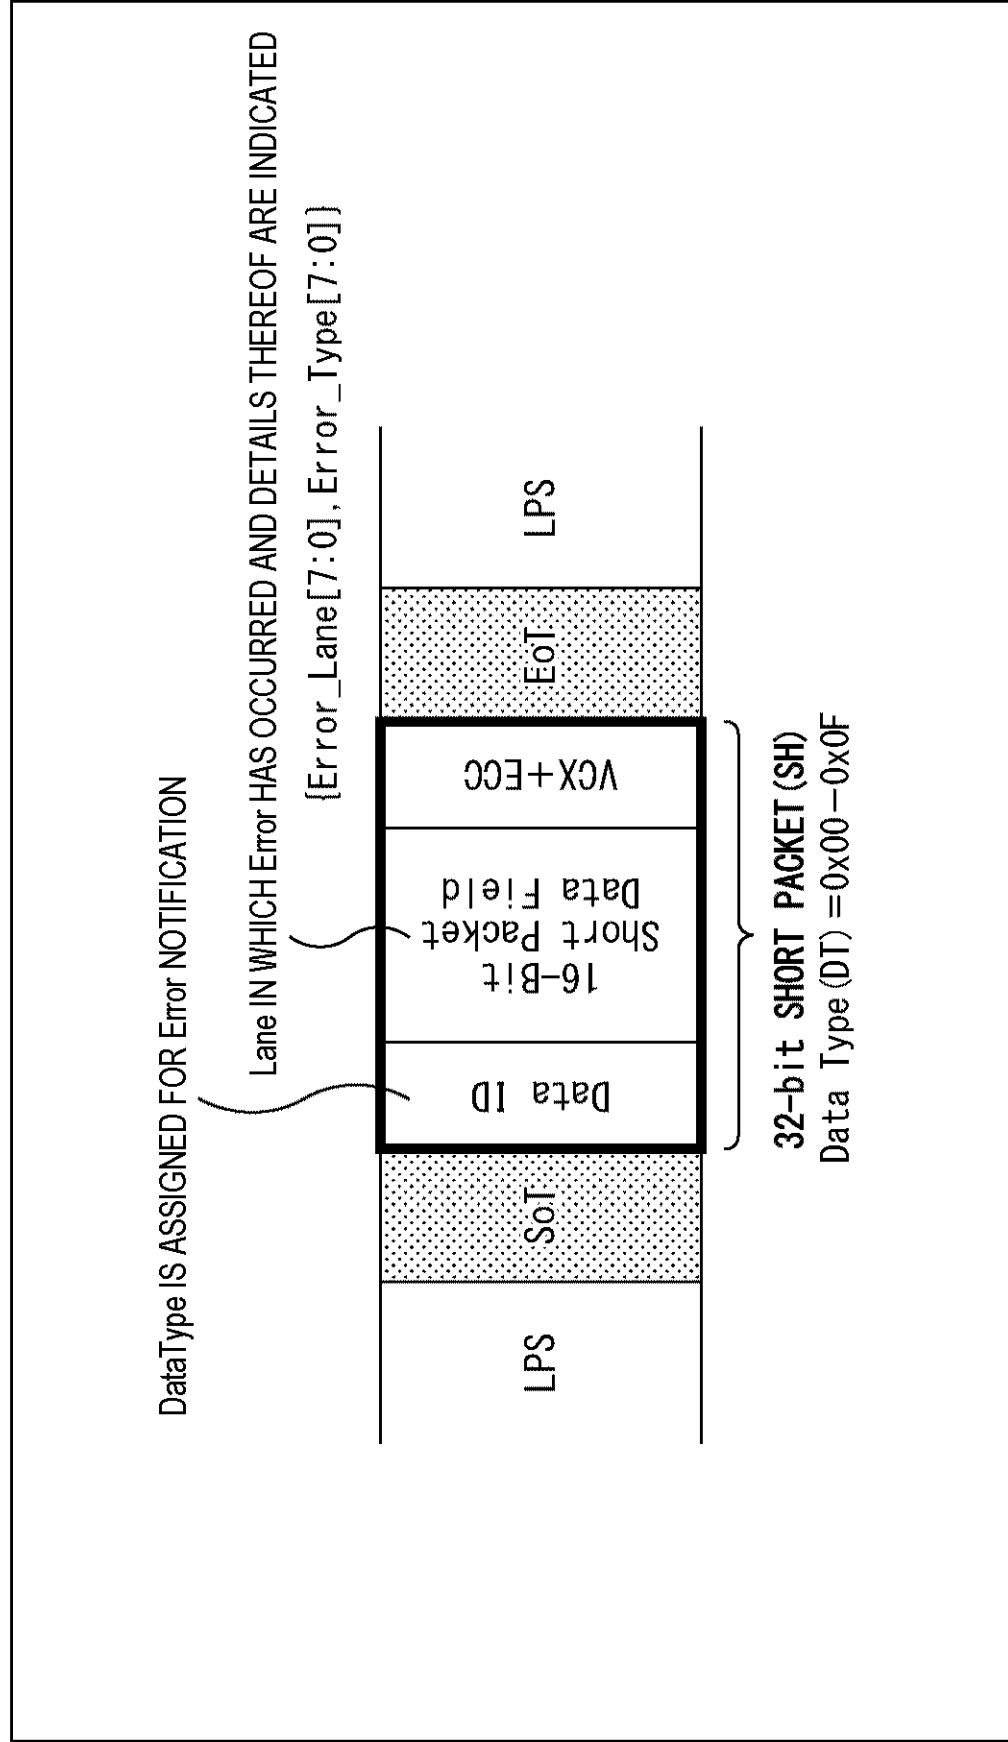


FIG. 5

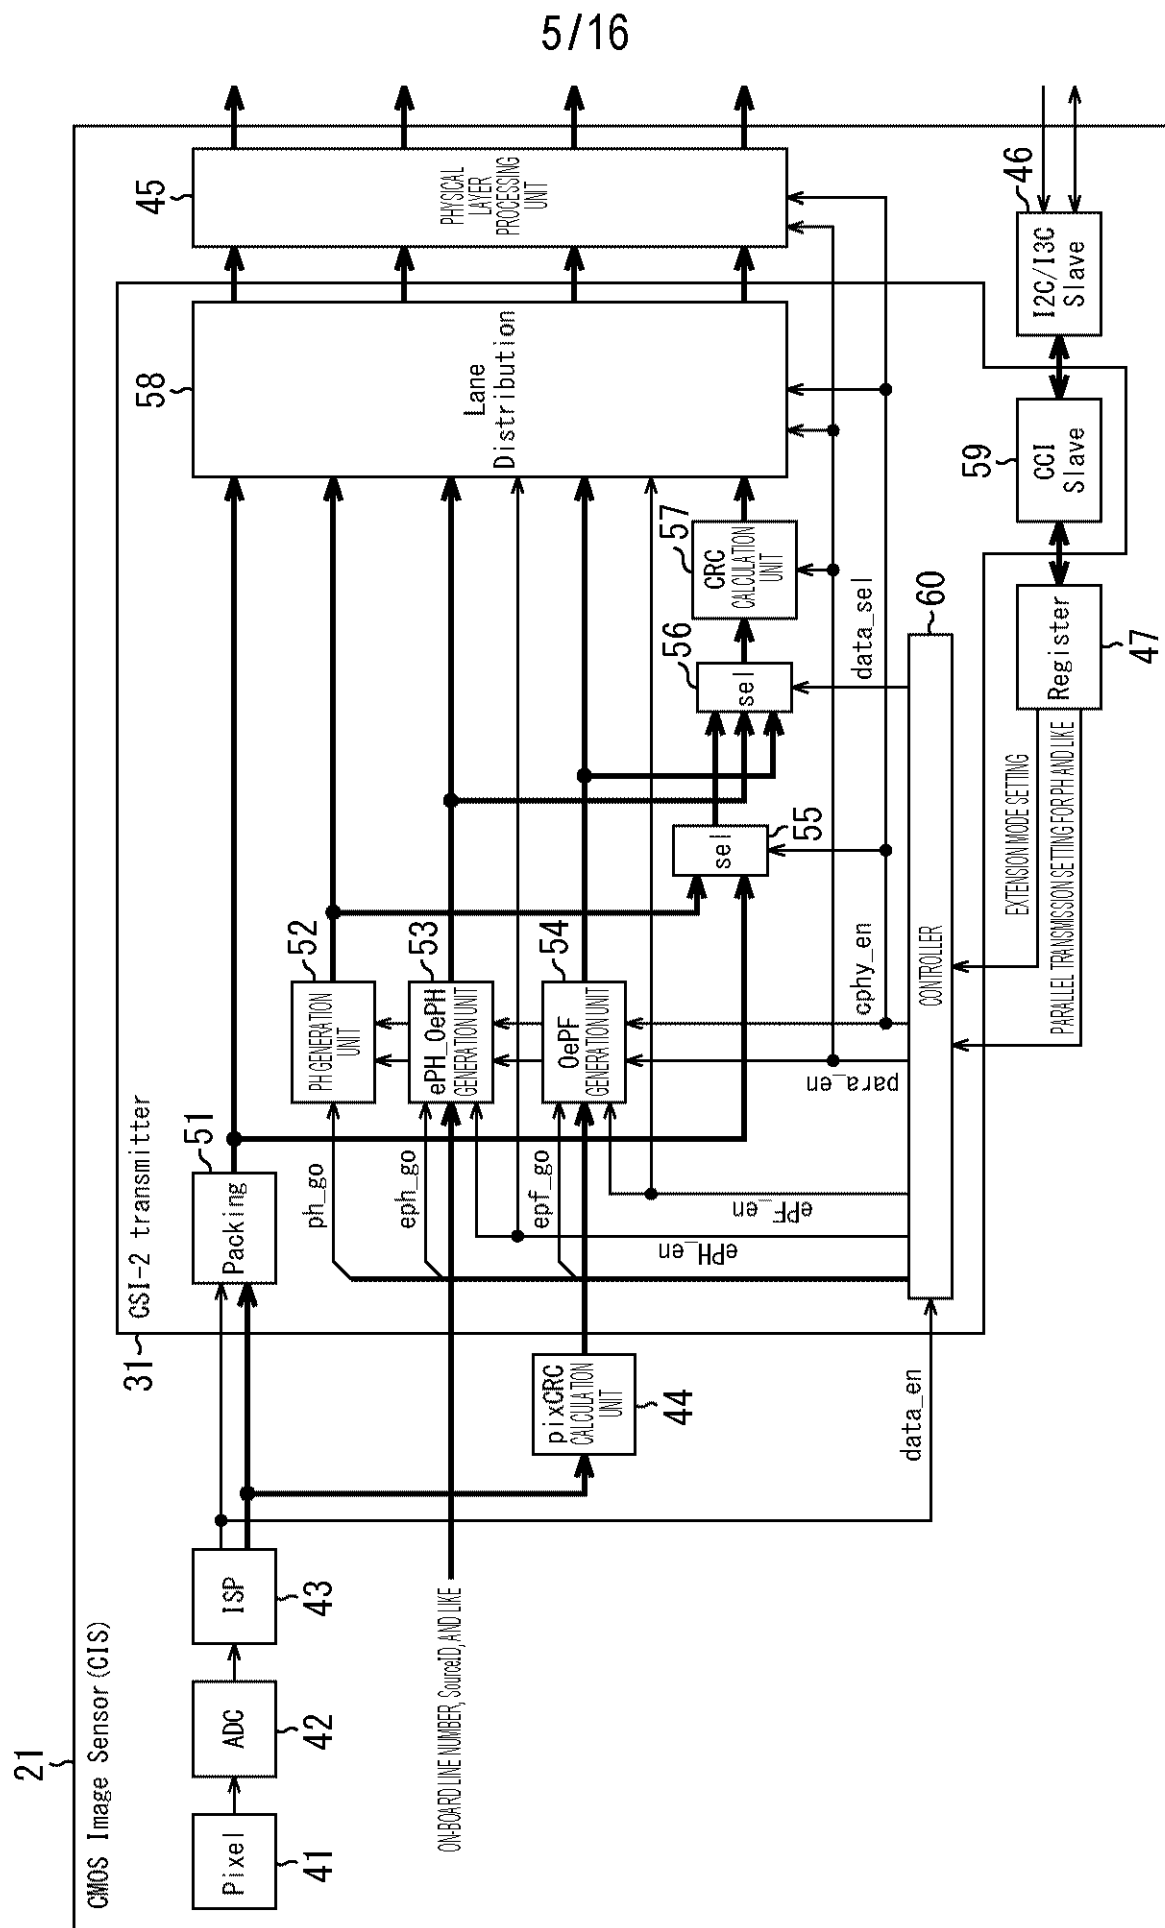


FIG. 6

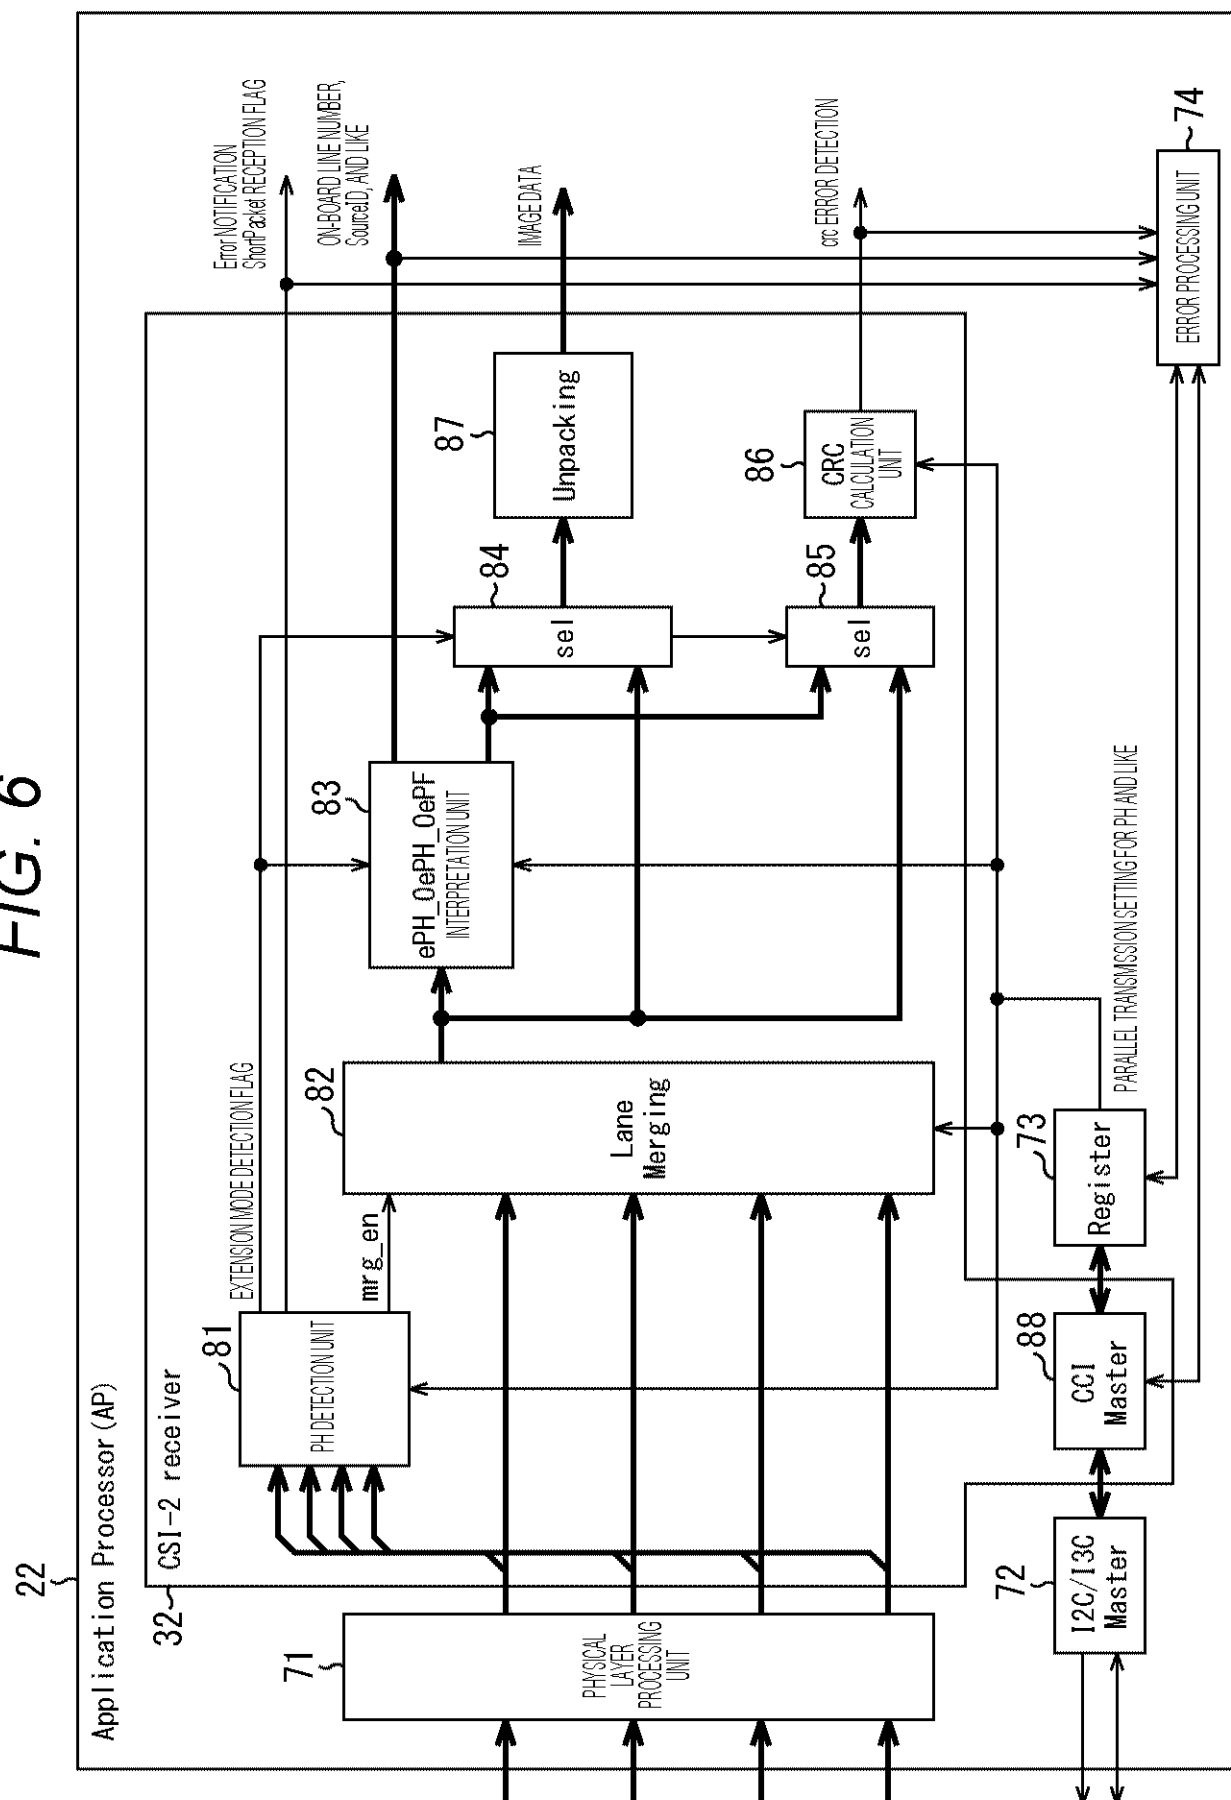


FIG. 7

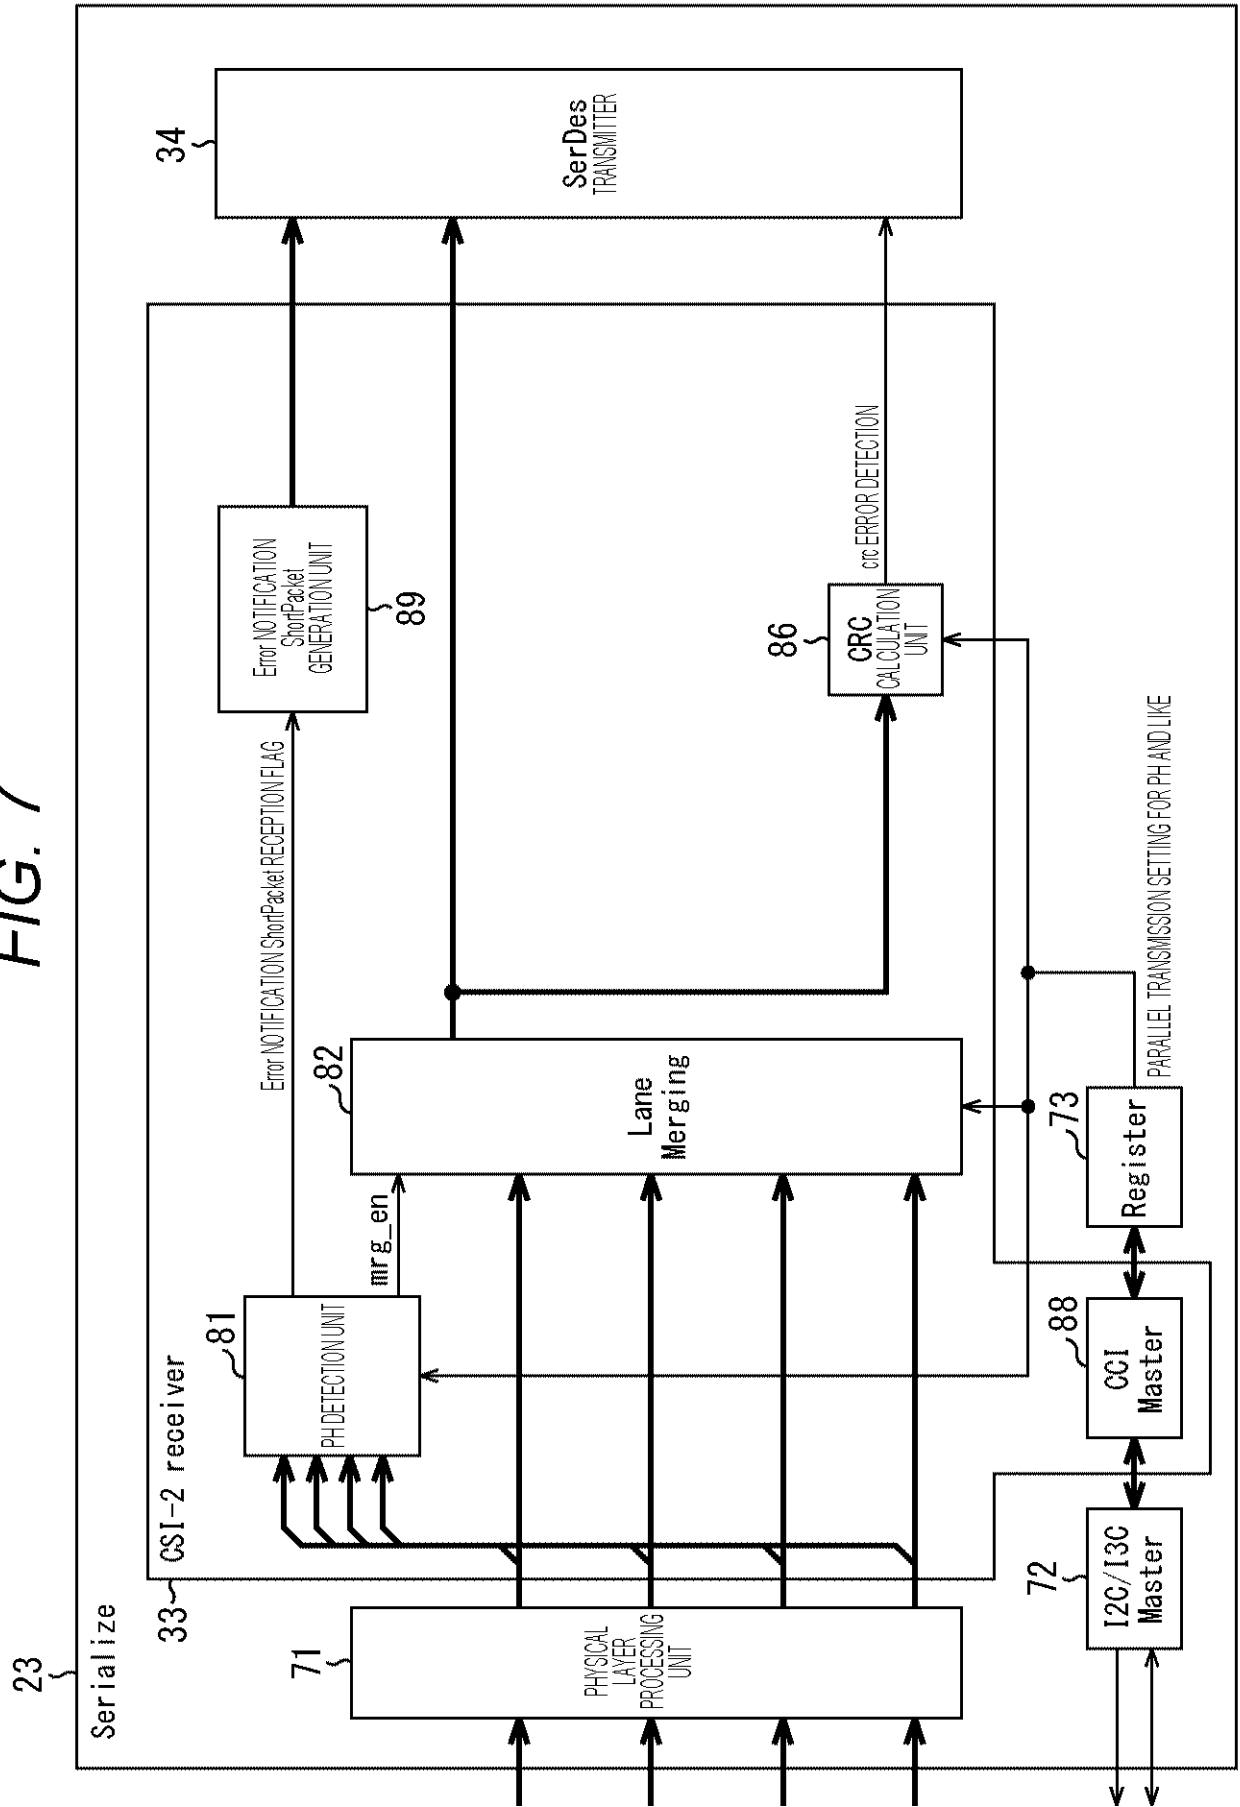


FIG. 8

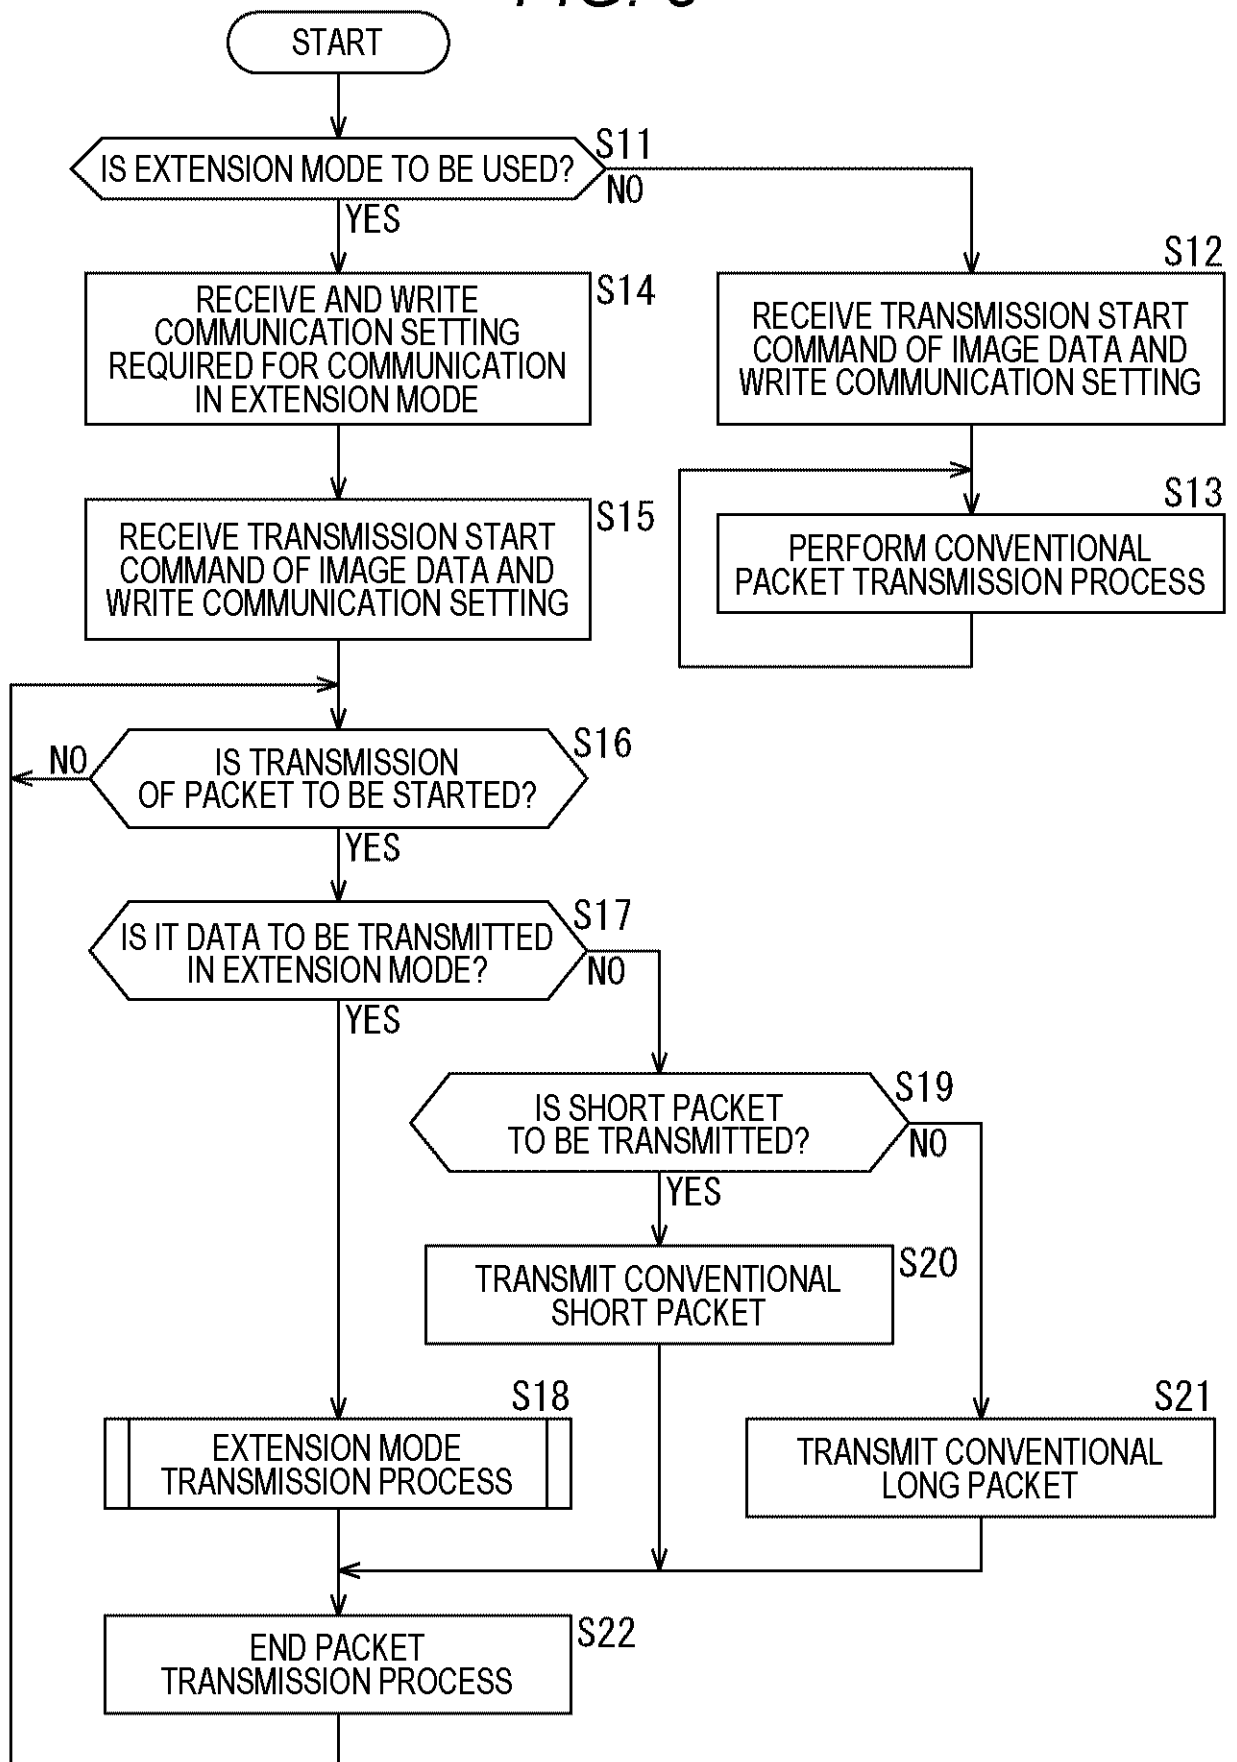


FIG. 9

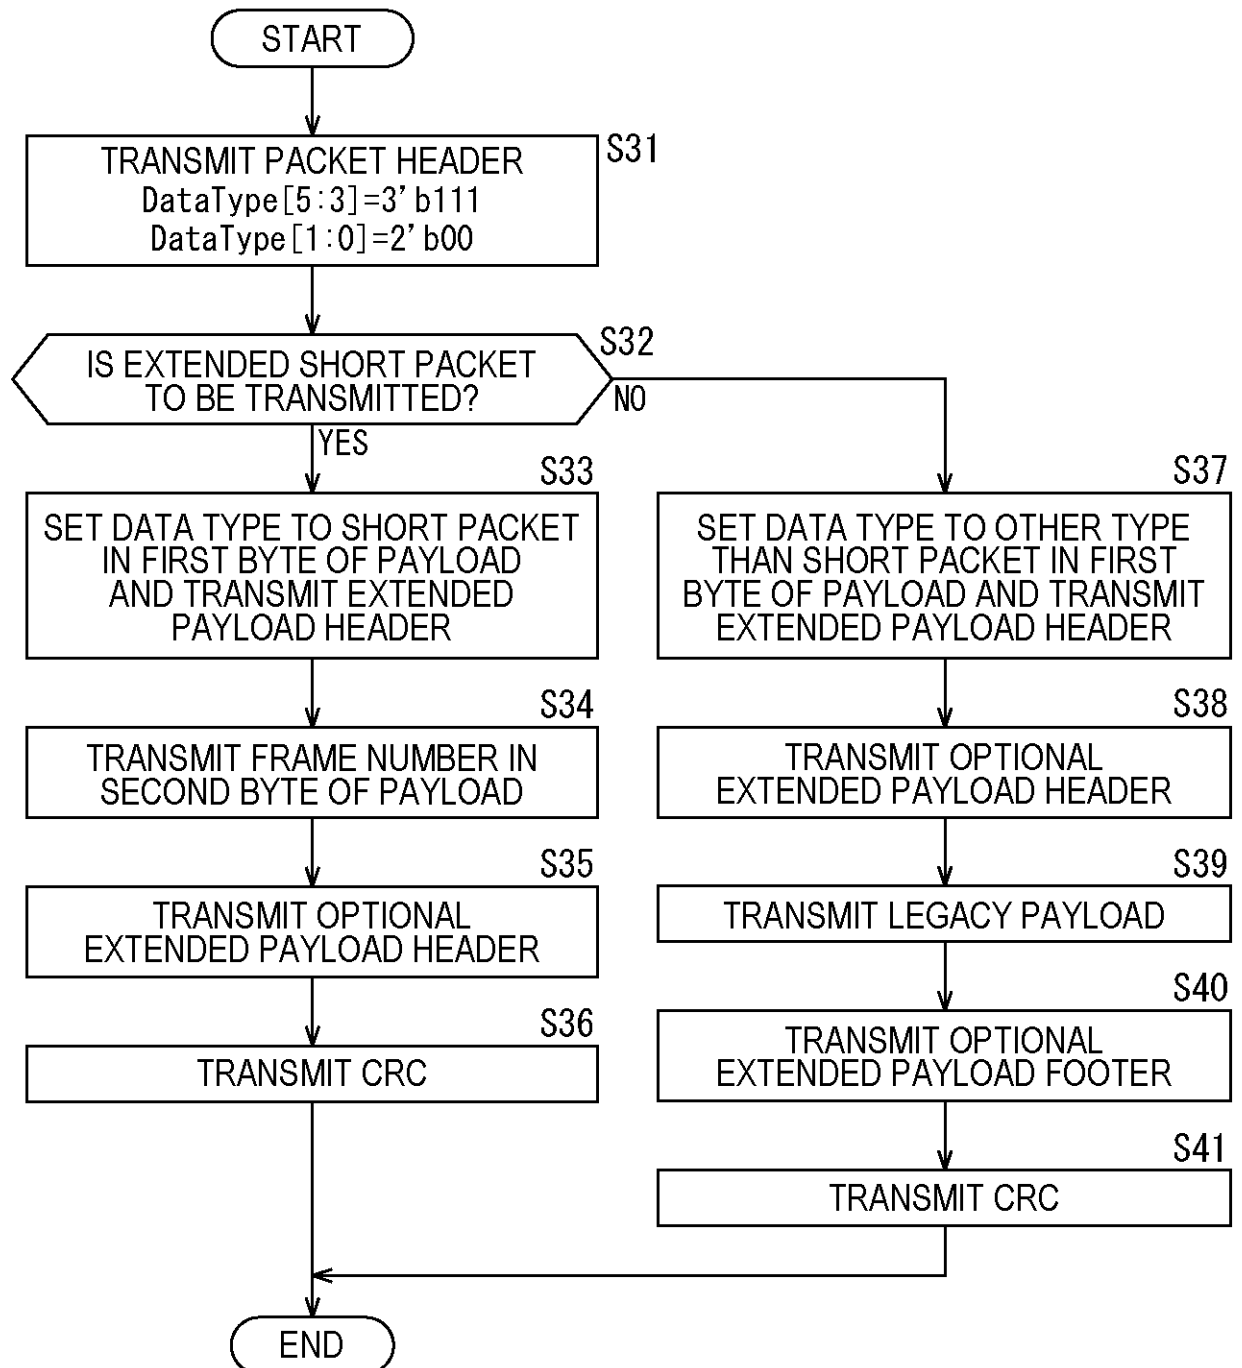


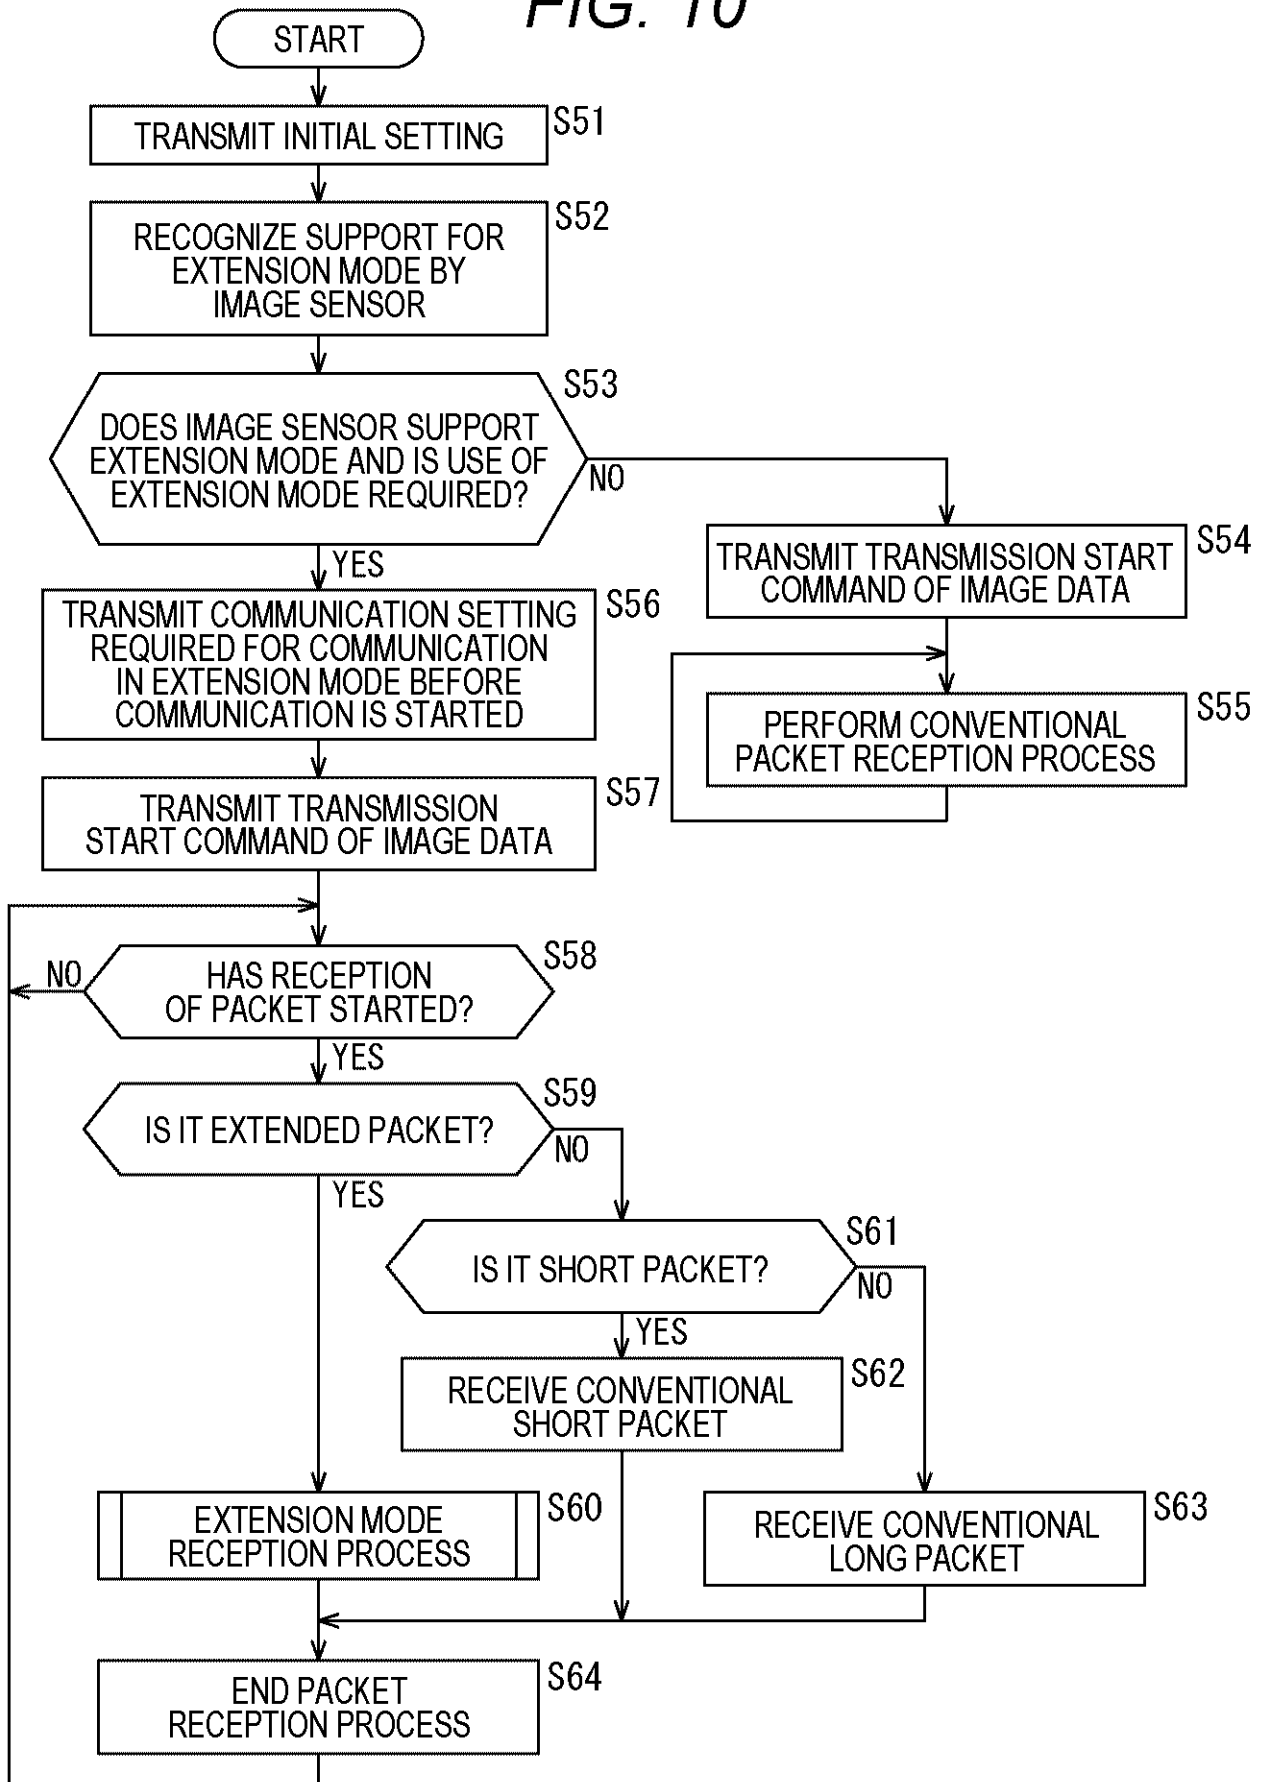
FIG. 10

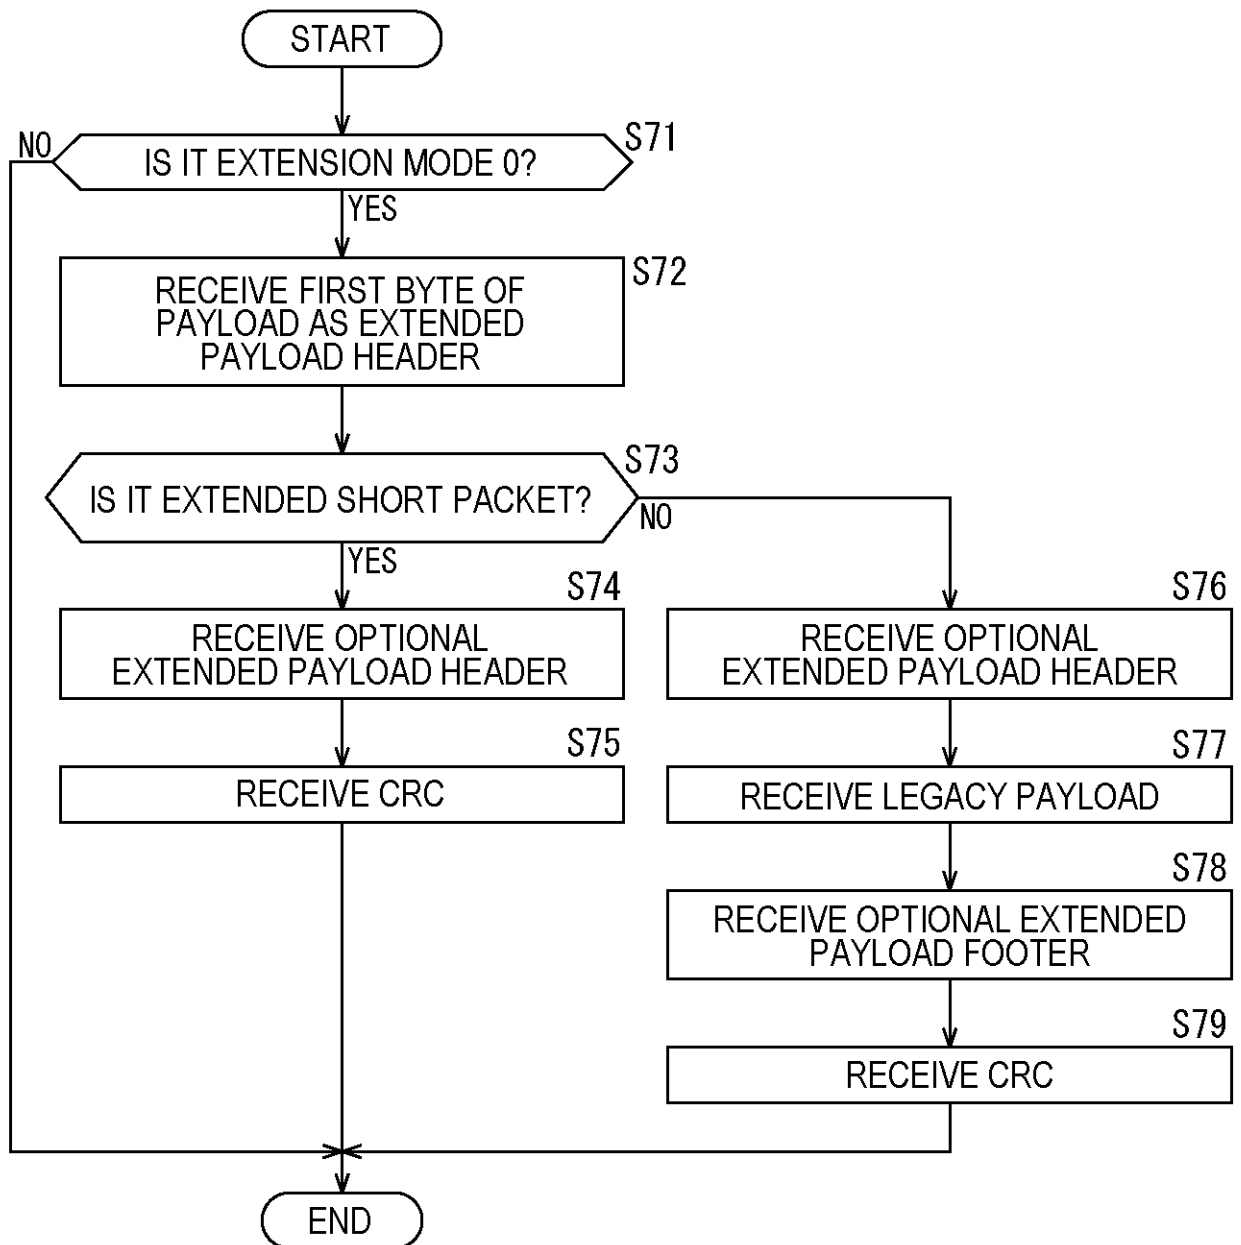
FIG. 11

FIG. 12

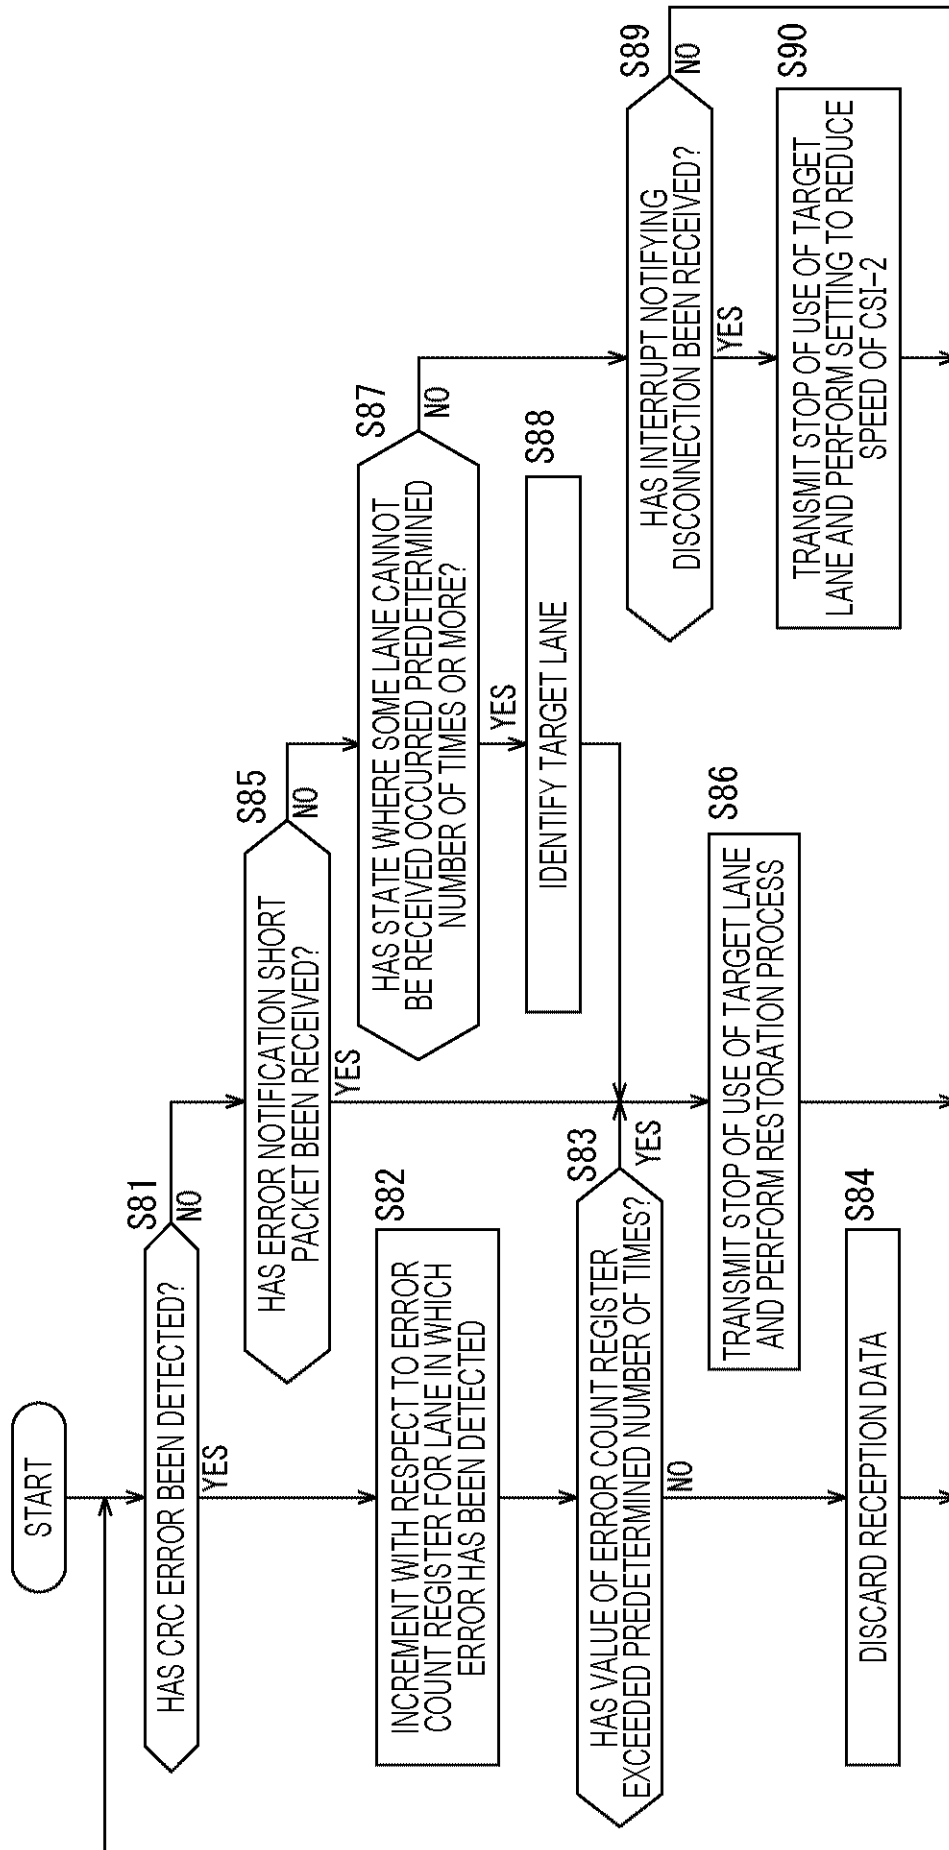


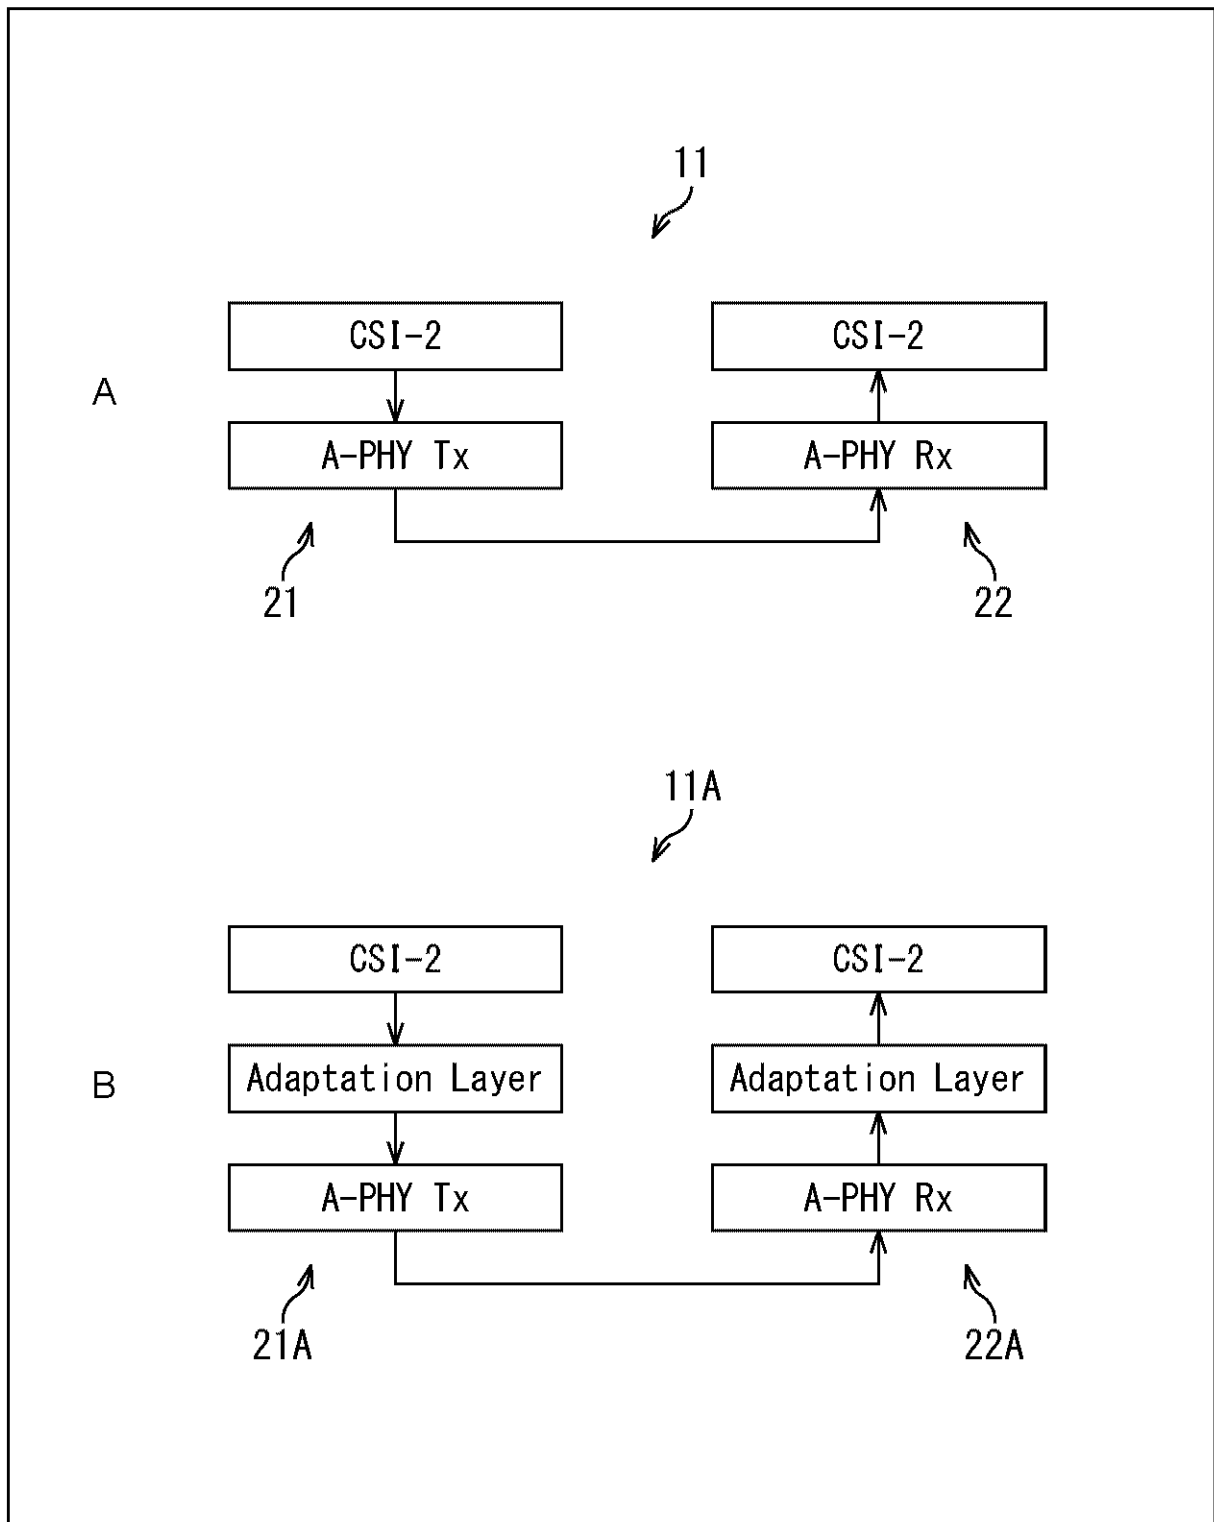
FIG. 13

FIG. 14

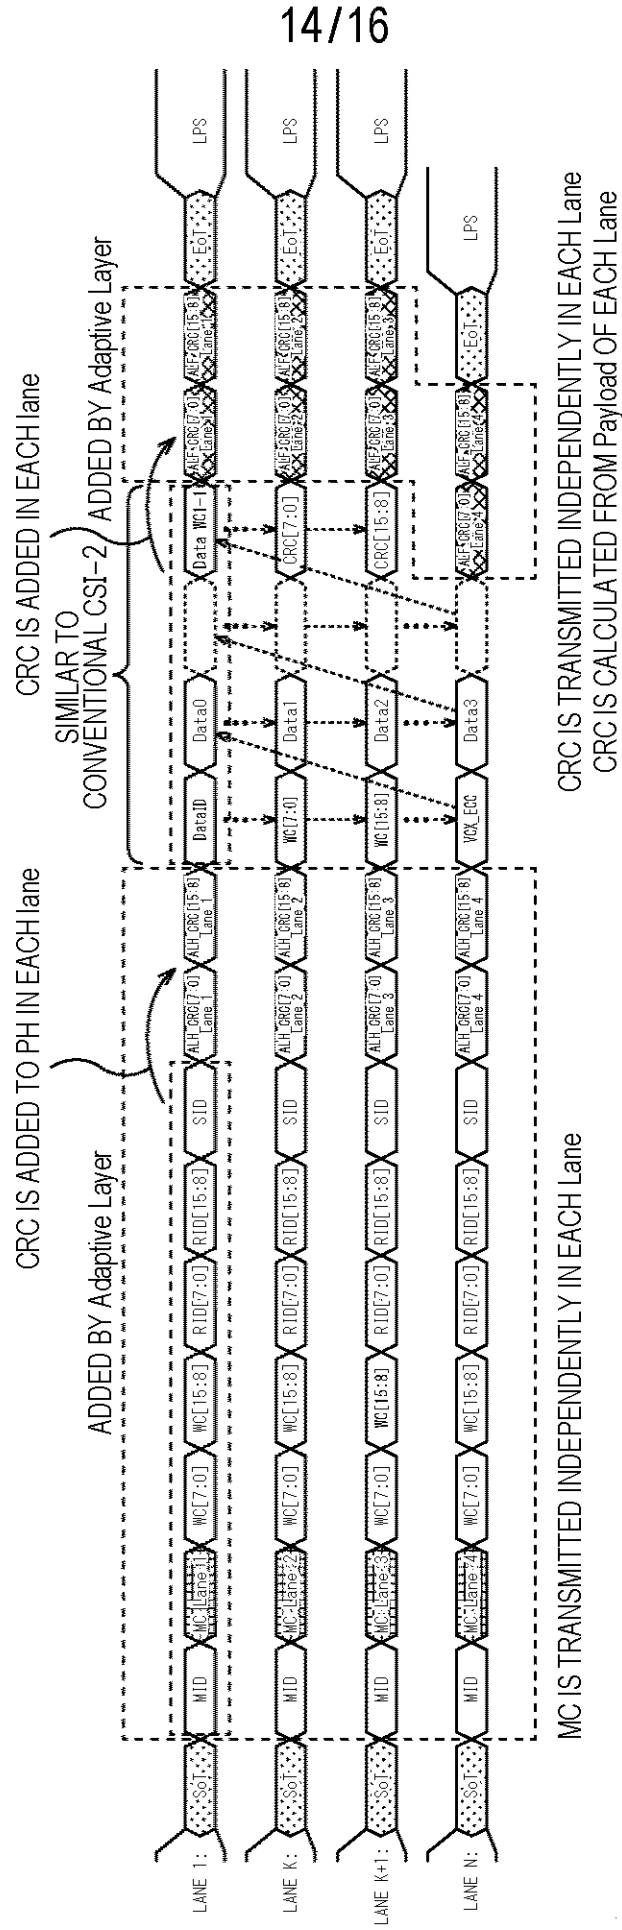


FIG. 15

11A

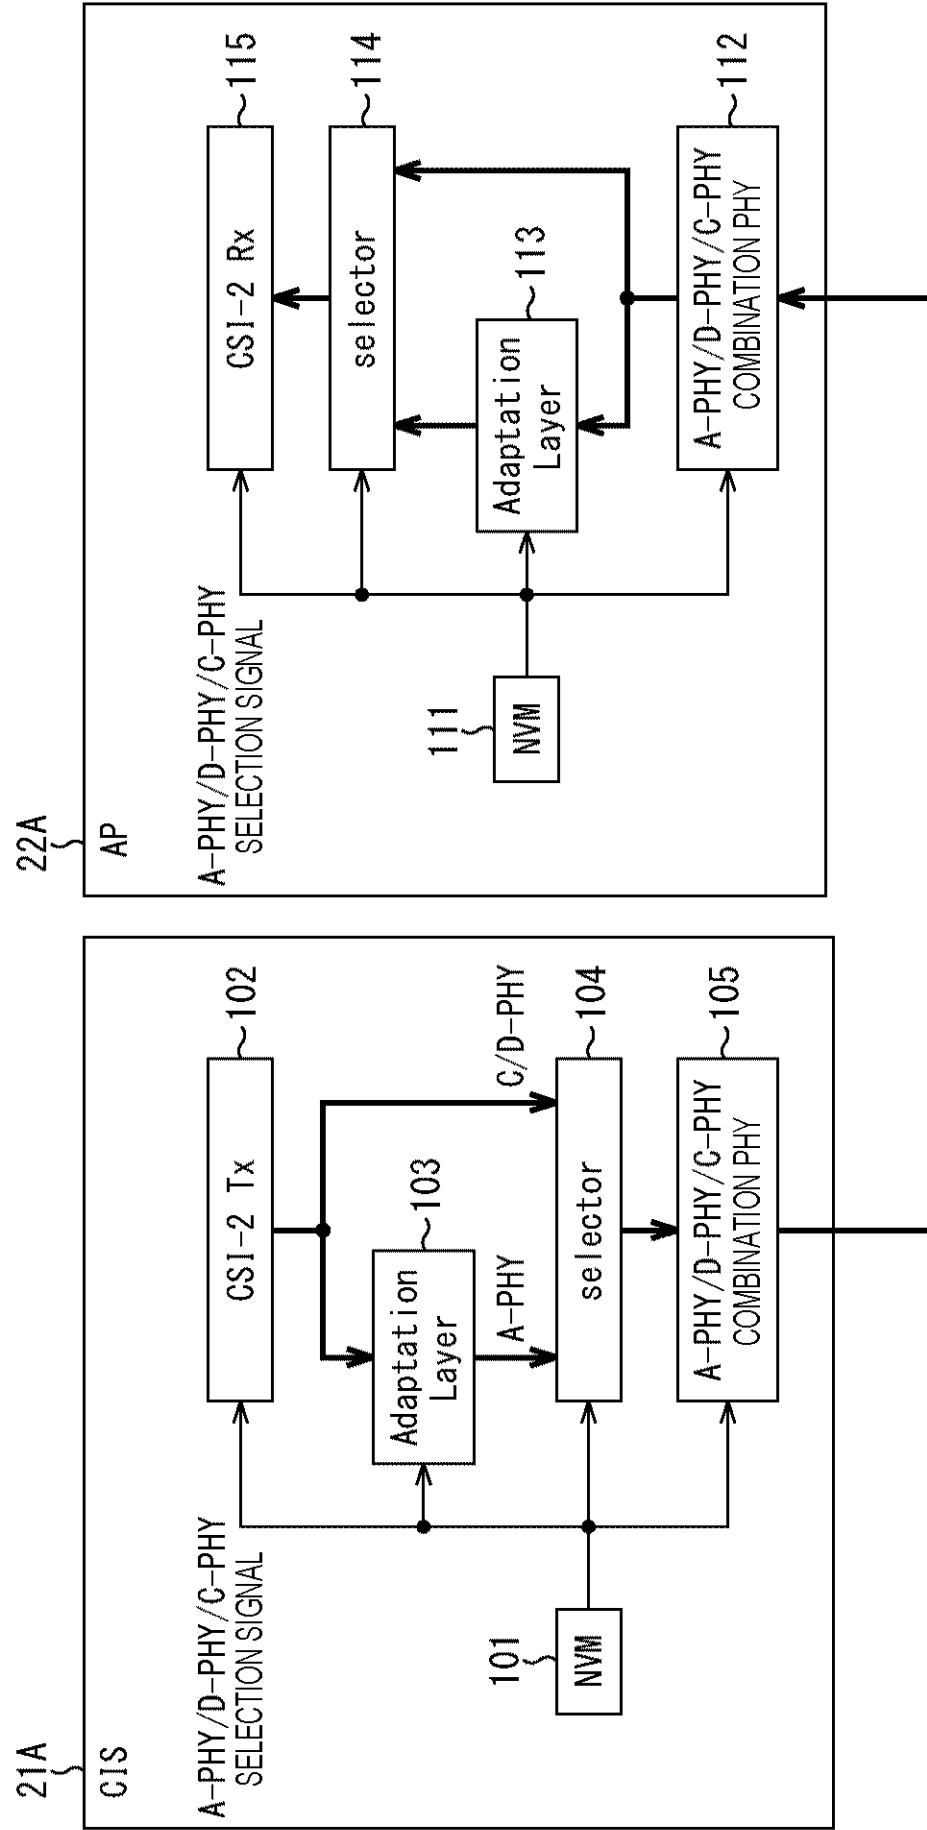


FIG. 16

