

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)

PCT

(10) International Publication Number
WO 2004/070400 A1

(51) International Patent Classification⁷: **G01R 1/073**,
B25J 17/02

[US/US]; 17 Goose Pond Road, Tabernacle, NJ 08088 (US). **NAPPEN, Charles** [US/US]; 100 Conestoga Drive, Apartment 168, Marlton, NJ 08053 (US).

(21) International Application Number:
PCT/US2004/002103

(74) Agent: **ASHERY, Lawrence, E.**; RatnerPrestia, P.O. Box 980, Valley Forge, PA 19482 (US).

(22) International Filing Date: 26 January 2004 (26.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/442,988 28 January 2003 (28.01.2003) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **INTEST IP CORPORATION** [US/US]; 7 Esterbrook Lane, Cherry Hill, NJ 08003 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **AKOUKA, Henri, M.** [US/US]; Apartment 4, 69 East Main Street, Moorestown, NJ 08057 (US). **WEST, Christopher, L.**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: WRIST JOINT FOR POSITIONING A TEST HEAD

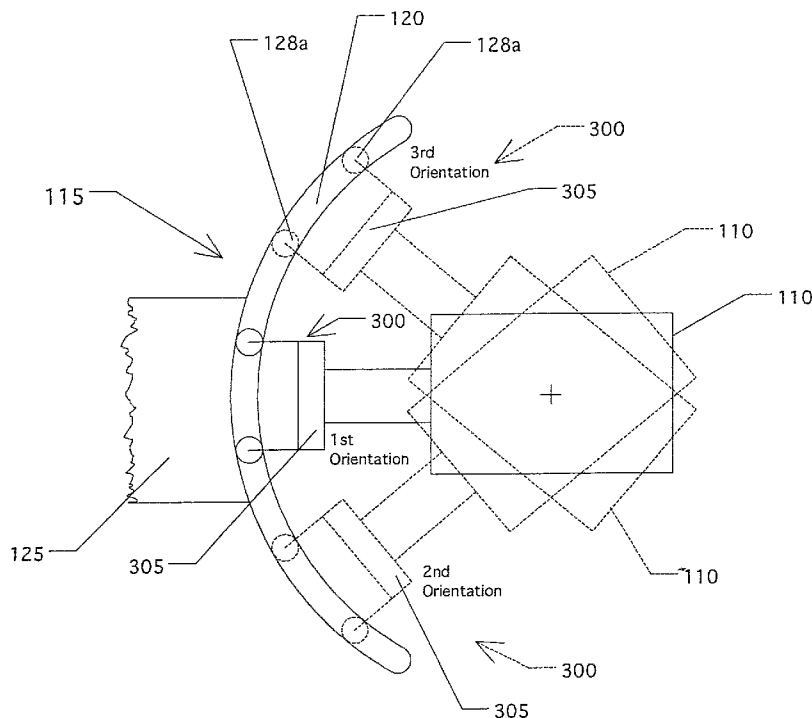

(57) Abstract: An apparatus for supporting a load comprises a pivot apparatus coupled to the load and movable with the load; and a base stationary relative to the pivot apparatus. At least two areas of support are situated between the pivot apparatus and the base. Respectively opposite force components are at the two areas of support. The two areas of support move along a one curved path to tilt the load.

WO 2004/070400 A1



GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*