



- (51) **International Patent Classification:**
Not classified
- (21) **International Application Number:**
PCT/US2021/062060
- (22) **International Filing Date:**
06 December 2021 (06.12.2021)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
63/122,414 07 December 2020 (07.12.2020) US
63/250,751 30 September 2021 (30.09.2021) US
- (71) **Applicant: FUTUREWEI TECHNOLOGIES, INC.**
[US/US]; 5700 Tennyson Parkway, Suite 600, Plano, Texas 75024 (US).
- (72) **Inventors: MAAMARI, Diana;** 1713 S Meacham Road, Palatine, Illinois 60067 (US). **CLASSON, Brian;** 756 West Bloomfield Ct, Palatine, Illinois 60067 (US). **SARTORI, Philippe;** 4332 Fraser Lane, Naperville, Illinois 60564
- (US). **DESAI, Vipul;** 1092 N Penny Ln., Palatine, Illinois 60067 (US).
- (74) **Agent: ZOU, Hong;** Slater Matsil, LLP, 17950 Preston Road, Suite 1000, Dallas, Texas 75252 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) **Title:** METHOD AND APPARATUS FOR IDENTIFICATION OF REDCAP UES

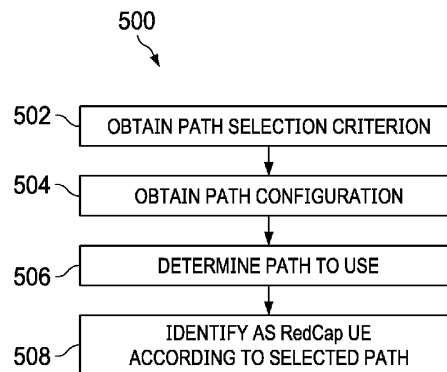


FIG. 5

(57) **Abstract:** A user equipment (UE) may determine, based on a criterion, whether to indicate, to a gNB, that it is a reduced capability (RedCap) UE during or after a random access (RA) procedure, and indicate that it is the RedCap UE during or after the RA procedure according to a determination result. The RedCap UE has a reduced quantity of receive branches or a reduce bandwidth than a non-RedCap UE. The gNB may determine whether a first message received during the RA procedure indicates that the UE is the RedCap UE. When the first message indicates the UE as the RedCap UE, the gNB sends a second message to the UE during the RA procedure using a coverage recovery technique. When the first message does not indicate the UE as the RedCap UE, the gNB determines whether the UE is the RedCap UE after the RA procedure is completed.

[Continued on next page]

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *of inventorship (Rule 4.17(iv))*

Published:

- *upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)*
- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*