

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 November 2003 (20.11.2003)

PCT

(10) International Publication Number
WO 2003/096489 A1

(51) International Patent Classification⁷: **H01R 25/14**,
H02G 5/04

(74) Agent: **GREENE-KELLY, James, Patrick**; Lloyd Wise,
Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).

(21) International Application Number:
PCT/SG2003/000100

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 30 April 2003 (30.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200202742-3 8 May 2002 (08.05.2002) SG
200300071-8 10 January 2003 (10.01.2003) SG

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **NUTEK PRIVATE LIMITED** [SG/SG]; 39, Joo Koon Circle, Singapore 629105 (SG).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **JONG, Choon** [MY/SG]; c/o Nutek Private Limited, 39, Joo Koon Circle, Singapore 629105 (SG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) *for US only*

[Continued on next page]

(54) Title: APPARATUS FOR DISTRIBUTING ELECTRICAL POWER AND/OR COMMUNICATION SIGNALS

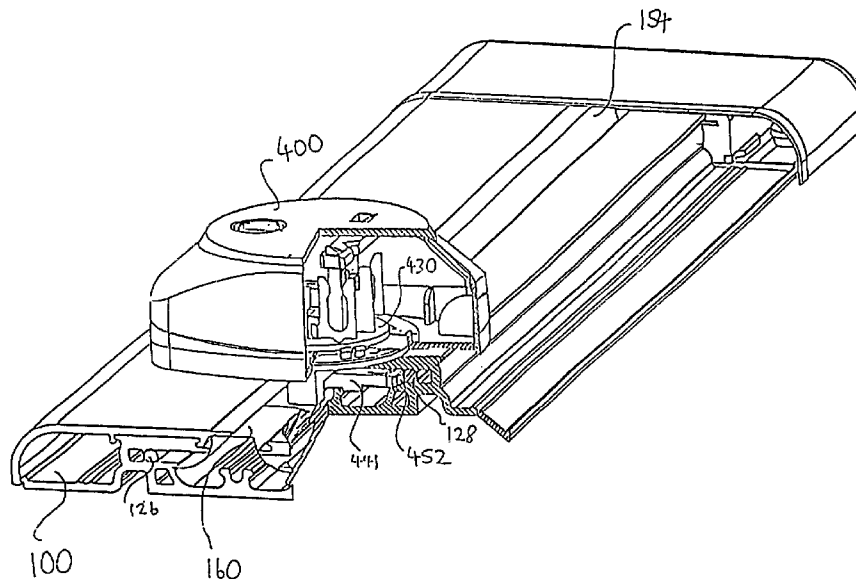

(57) Abstract: In one embodiment, an electrical power distribution apparatus is disclosed which includes a track made up of a plurality of track sections (100) connected together by/to joints and end sections. The track sections (100) are each provided with a slot with which a power point connector (400) may be engaged at any point by inserting a contact member of the connector (400) through the slot at a chosen point and then rotating the connector (400) by 90 degrees to bring the contact member into engagement with electrical conductors (126, 128) of the track. The apparatus may comprise a further conduit containing conductors used to distribute communication signals.

WO 2003/096489 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(48) Date of publication of this corrected version:

29 April 2004

(15) Information about Corrections:

see PCT Gazette No. 18/2004 of 29 April 2004, Section II

Previous Correction:

see PCT Gazette No. 12/2004 of 18 March 2004, Section II