

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 October 2002 (31.10.2002)


PCT

(10) International Publication Number
WO 02/086666 A2

- (51) International Patent Classification⁷: **G06F** (74) Agents: **GROMADA, James, A.** et al.; Katten Muchin Zavis Rosenman, 525 West Monroe Street, Suite 1600, Chicago, IL 60661-3693 (US).
- (21) International Application Number: PCT/US02/12336
- (22) International Filing Date: 19 April 2002 (19.04.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/839,050 20 April 2001 (20.04.2001) US
- (71) Applicant (*for all designated States except US*): **ADS CORPORATION** [US/US]; 5030 Bradford Drive, Building 1, Suite 210, Huntsville, AL 35805 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **SCHUTZBACH, James, Scott** [US/US]; 110 Springton Drive, Madison, AL 35758 (US). **STEVENS, Patrick, Lee** [US/US]; 7637 North Audubon Road, Indianapolis, IN 46250 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: FLOW TRANSPORT ANALYSIS METHOD AND SYSTEM

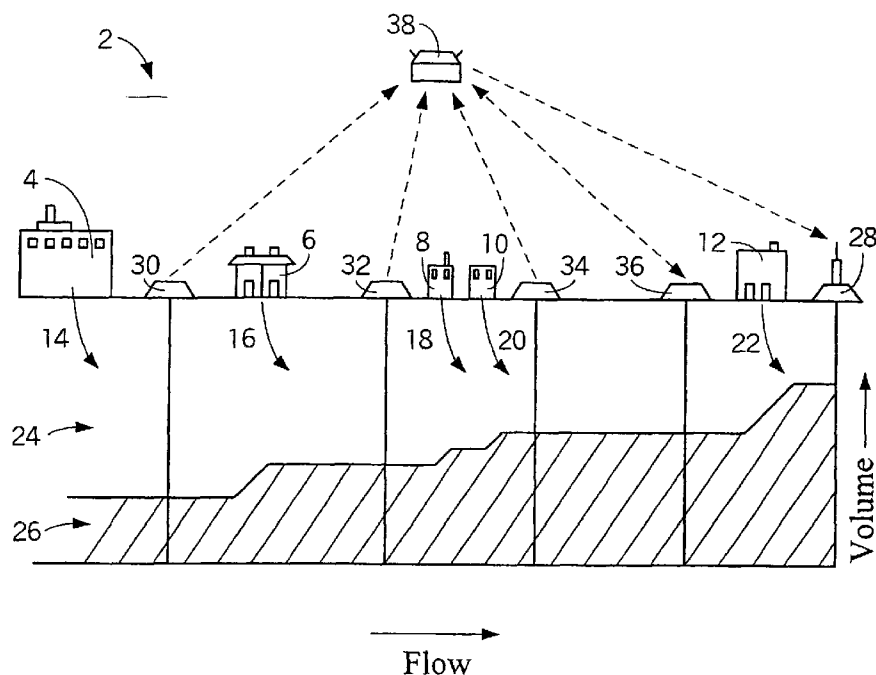

(57) Abstract: A method and system for analyzing flow of a substance in a sewer system determines a first flow velocity at a first location and a second flow velocity at a second location. Using a processor, the travel time between the two locations is determined using only the flow velocities and a constant. The travel time may then be used to provide a substantially accurate determination of net flow between the two locations.



WO 02/086666 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.